

# **Product catalogue**

Refrigeration, Systems, Thermoregulation



Rel. 02/14



# **Product catalogue**

Refrigeration, Systems, Thermoregulation

## **CONTENTS**

KEY Page 6-7

ELECTRONIC CONTROLS		Page 8
32x74 cold/hot thermostats	IDPlus 902 - IDPlus 961	Page 9
32x74 refrigeration thermostats	IDPlus 971 - IDPlus 974	Page 10
•	IDPlus 978	Page 11
32x74 cold/hot thermostats	ICPlus 902	Page 12
	ICPlus 915	Page 13
PID 32x74 cold/hot thermostats	IC 917/PID (SSR)	Page 14
Temperature, humidity, pressure indicators	EM 300 (LX)	Page 15
LCD thermometers	EWTL 300 - EWTL 310 - DST-30	Page 16
DIN controllers for refrigeration	EWDR 981- EWDR 984	Page 17
DIN controllers for remote cabinets	EWDR 983 LX/S - EWDR 985 LX/S/C/K	Page 18
Universal DIN controllers	DR4020	Page 19
Universal DIN controllers with serial port	DR4022	Page 20
Universal 48x48 controllers	EW 4820 (SSR)	Page 21
Universal 48x48 controllers with serial port	EW 4822 (SSR)	Page 22
Universal 72x72 controllers	EW7210 - EW7220	Page 23
Universal 72x72 controllers with serial port	EW7221 - EW7222	Page 24
32x74 timers and counters	EWTS 950 - EWTS 990 LX	Page 25
Control panels for cold rooms	EWRC 300 LX - EWRC 500 LX	Page 26
32x74 controllers for compressor racks	EWCM 4120 - 4150 - 4180	Page 27
DIN controllers for compressor racks	EWCM 8900 - 9100 EO	Page 28
	EWCM 9900 EO	Page 29
Speed controllers for single-phase fans	FASEC 33 - FASEC 43 (C) - FASEC 53	Page 30
	FASEC 100 - FASEC 105 - FASEC 155	Page 31
	FASEC 500 - FASEC 505 - FASEC 555	Page 32
Speed controllers for single-phase wall fans	WM 253	Page 33
Speed controllers for three-phase fans	DRM300 - RGM300	Page 34
Power modules to control fan speed	CFS02 - CFS04 - CFS06 - CFS08	Page 35

SOLUTIONS FOR SUPERMARKETS		Page 36
DIN controllers for remote EEV systems	RTX600/V - RTD600/V - KDEPlus - ECPlus	Page 37
DIN controllers for cabinets and cold rooms	RTX600 - KDEPlus - KDWPlus - ECPlus	Page 38
EEV system for retrofit	EEV Pulse system	Page 39-40
Electronic pulse expansion valve	PXV	Page 41-44
EEV stepper system	EEV Stepper system	Page 45
Bipolar 'stepper' expansion valve	SXVB	Page 46-47
DIN controllers for compressor racks	EWCM 8900 - 9100 EO	Page 48
	EWCM 9900 EO	Page 49
Motorised electronic valve control	Subcritical CO2 cascade system	Page 50
Monitoring and maintenance systems via web	Televis <b>Go</b>	Page 51-52
Data acquisition and actuator modules	Televis <b>In</b> - Televis <b>Out</b>	Page 53
Detection and indication of refrigerant leaks	LKD	Page 54
Temperature recording and printing	Memory 1000	Page 55
Connectivity modules for monitoring systems	Serial Adapter - Lan Adapter Ethernet - Lan Adapter WiFi	Page 56
Wireless connectivity modules	RadioAdapter - RadioAdapter (/S) EXT - Radio Key	Page 57
RS-485 opto isolator connectivity modules	<b>Bus</b> Adapter 130 - 150	Page 58
Modems	Modem GSM/GPRS	Page 59

## **CONTENTS**

ELECTROMECHANICAL ACCESSORIES AND COMPONENTS		Page 60
Controller configuration software tool	DeviceManager	Page 61
Memory stick for fast configuration and updating of controllers	Unicard - USB Copy Card - Copy Card - Multi Function Key	Page 62
NTC semi-conductor temperature probes	NTC	Page 63
Pt100 - Pt1000 thermo-resistive Temperature probes	Pt100 - Pt1000 probes	Page 64
PTC semi-conductor temperature probes, TC thermocouples	PTC - TC probes	Page 65
Pressure transducers	EWPA 007 - 030 - 050	Page 66
Ratiometric pressure transducers	EWPA 010 - 030 - 050	Page 67
Humidity probes	EWHS 284 - 304 - 314	Page 68
Protections for 32x74 controllers	Drip protection - Plexiglass protection	Page 69
EW BOX - INOX BOX	EW BOX - INOX BOX	Page 69
Transformers	TF Transformers	Page 70

PRODUCTS FOR MANUFACTURERS		Page 71
Solutions for refrigerated cabinets with compressor on board	nEW - EWPlus series	Page 72
Solutions for cabinets with door	EWPlus EO series	Page 73
Solutions for refrigerated dispensers / beer taps	EWPlus 961 - 971 EO Dispenser	Page 74
Solutions for dual-circuit	EWPlus 978	Page 75
Solutions for mono-blocks	IWP 750	Page 76
Solutions for professional applications / catering	IWC 700 series	Page 77
Solutions for supermarket refrigerated cabinets	RTX600/V - RTD600/V series	Page 78
	RTX600 - RTN600 series	Page 79
User interfaces for RT family	RTN400 series	Page 80
Programmable platform	KD - ECPlus series user interfaces	Page 81
	FREE Way	Page 82
	FREE Studio	Page 82
	FREE Smart - FREE Panel - FREE Evolution	Page 83

APPENDIX		Page 84
Temperature probe tables	NTC probe table - NTC Extended range - PTC	Page 85
	Pt100 - Pt1000 probe table	Page 86
	TCJ -TCK probe table	Page 87
Compatibility tables	IDPlus vs EW and ID, ICPlus vs IC compatibility	Page 88

#### **KEY**



#### **EO (Environmentally Optimised)**

EO is the acronym for the words Environmentally and Optimised, that is "Optimised for the environment". This symbol represents the new solutions created by Eliwell designers: highly efficient, eco-system compliant, designed to give the user solid advantages. Devices are developed with new energy saving algorithms that can guarantee immediate, measurable economic returns. Compatible with the new ecological refrigerants R290 and R600, products have been designed to guarantee lower operating and maintenance costs and are linked to an active packaging recycling program. Design efforts have enabled us to simplify all installation, maintenance and use operations as much as possible.



#### **MODBUS-RTU**

ModBus is a serial communication protocol that allows communication between different devices connected to the same network. ModBus is often used to connect a supervisor computer with a data and monitoring system to a remote terminal unit (RTU).



#### **RS-485**

This is the standard that describes the communication interface for serial connection between a network of devices and the computer. The network, normally with 3 wires, makes it possible to cover much longer distances than the RS-232 standard. The protocol used for the communication can either be Eliwell, i.e. created according to Eliwell specifications, or ModBus.



#### LINK

The Link function makes it possible to connect a master and a number of slave and echo devices in a network and allows the sharing of network functions in order to maximise management of small control systems.



#### COPY CARD

The Copy Card is an accessory that connects to a TTL type serial port and allows the rapid programming of instrument parameters.



### UNICARD

Unicard is an accessory that allows to rapidly program parameters. Via the USB port and the Device Manager software it transfers the parameters value to and from the personal computer.

Via the TTL serial port it transfers the parameters value to and from the controller.



#### TELEVISSYSTEM

Televis**System** is a remote management and monitoring system for industrial and commercial systems, ideal for supermarkets and hypermarkets and also for viewing the history of the recordings made. Data can either be printed or extracted and downloaded in a format which is compatible with the most commonly used office automation software. The monitoring system can be accessed remotely via a web browser, using any PC or handheld device connected to the network.



#### RTC

Internal clock (Real Time Clock) for managing programmable functions at preset times.

A product with an RTC has a function that can give the current time of day, together with the day of the week. This function is used, for example, to set the defrosting start time or setpoint changes at times preset by the user. A set of dedicated parameters makes this important function easy to manage. In Eliwell instruments, the clock continues to operate in the event of power cuts without the use of batteries such as the Nickel-Cadmium type,

which are well known for having memory storage and general recharging problems. Autonomy is guaranteed for over 6 hours with a recharging time of about 1 minute.

#### HACCP

This is a sophisticated diagnostics system capable of detecting all temperature and black-out events that occur in the monitored refrigerated environment, recording them internally in the device in a non-volatile memory. This system was devised to meet the most exacting demands of the market with regard to the temperature control of preserved food in compliance with the 93/43/EU Directives.



#### **TEMPERATURE PROBES**

Thanks to the different materials used in the different models, the temperature probes are capable of covering a very wide temperature range; the sensors used are PTC, NTC, thermocouple, Pt100 and Pt1000. Depending on the kind of sensor, the protective casing (usually cylindrical) can be made of either ABS, Aisi 304/316 stainless steel or Inconel; for additional sensor protection, special materials are used (e.g. resins) between sensor and casing. The cable that transmits the signal to the instrument is made of either PVC, Silicone or Vetrotex and is available in different lengths. The range of use depends on the materials used, as well as on the type of sensor.



#### **HUMIDITY PROBES**

The EWHS series of probes are specially made for connection to humidity measurement instruments. EWHS 280 and EWHS 300 probes have one current output (4...20 mA) proportional to the relative humidity. EWHS 310 probes have two current outputs (0...20 mA), one for humidity and one for temperature.



#### **PRESSURE PROBES**

The EWPA series of probes are pressure reading devices; they have one 4...20 mA current output for transferring the signal to the measuring instrument. The EWPA 007 probes have an operating range up to 7 bar, whereas the EWPA 030 probes operate up to 30 bar.



#### PID

The PID function is an alternative to the on-off control for use in situations requiring greater precision and reduced oscillations with regard to the setpoint, in both 'hot' and 'cold' applications. Controllers with the PID function have a further option known as Autotuning, which automatically calculates the parameters necessary for better process control.



#### **SWITCHING POWER SUPPLY**

The switching power supply, that switches from either 100...240V~ or from 12...24V~/12...36V~ gives the installer the possibility of covering most areas of application, thus reducing the number of models that would be necessary if a transformer-type power supply was used.



### **ELECTRONIC CONTROLS**

Eliwell operates in the commercial, industrial and catering refrigeration sector, offering high technological innovation and efficient products and solutions.

Eliwell controllers are the ideal solution for compressor racks and equipment. They guarantee quality and safe preservation of fresh and frozen foods, providing the best refrigeration plant results, energy savings and reduced maintenance.

The vast range of sizes available makes Eliwell controllers fully adaptable for a vast range of applications.

The winning features of Eliwell products are:



### IDPlus 902 - IDPlus 961

32x74 cold/hot thermostats





















Codes	Description	Relay capacity	Power supply
IDP11D07*0000	IDPlus 902 NTC	8A	230V~
IDP11D03*0000	IDPlus 902 NTC	8A	12V~/ <del></del>
IDP17D07*0000	IDPlus 961 NTC	2Нр	230V~
IDP17D03*0000	IDPlus 961 NTC	2Hp	12V~/ <del></del>

<sup>\*</sup>The number or letter in this position indicates the languages available for the code:  $0 = IT; \ A = GR; \ C = CZ; \ E = EN; \ F = FR; \ G = DE; \ I = FI; \ L = FL; \ N = NL; \ O = PO; \ P = PT; \ R = RU; \ S = ES; \ T = TR;$ W=SV; Y=NO; Z=PT(BR).

#### **Applications**

The controllers in the IDPlus 902 and 961 ranges are new-generation devices with one activation point, capable of operation in conjunction with both heated  $applications \ and \ static \ cold \ storage \ units \ at \ normal \ temperatures (over 0^{\circ}C). \ IDPlus \ 902 \ and \ 961 \ controllers \ are \ equipped \ with \ the \ following \ functions: \ \textbf{Deep Cooling}$ Cycle (advanced algorithm that allows the quick chilling of the temperature), Easy Map (function that allows multiple preloaded machine configurations) and Condenser Over Heating (function that allows monitoring of the compressor discharge temperature and notifying of the need for maintenance of the condenser).


#### **Common features**

Appearance	New front design	
Display	Simplified user interface	
Configuration	4 default configurations included, selectable and	
	restorable	
Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	
	display window, thermoplastic resin buttons	
Dimensions	front panel 74x32mm, depth 59mm	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	
	drilling template	

Operating temperature	-555°C
Storage temperature	-3085°C
Ambient humidity for	
operation and storage	1090% RH (non-condensing)
Functions	HACCP, DCC, Easy Map, COH
Connectivity	can be connected to Televis <b>System</b>
	and ModBus
Accessories	New USB/TTL Unicard for uploading/
	downloading parameters

Technical data	IDPlus 902	IDPlus 961
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C	• PTC probe: -55.0140.0 °C
	• Pt1000 probe: -55.0150.0 °C	• Pt1000 probe: -55.0150.0 °C
Display:	with decimal point * 3 digits + sign	with decimal point * 3 digits + sign
Analogue inputs:	1 PTC / NTC / Pt1000 *	1 PTC / NTC / Pt1000 *
Configurable inputs:	1 digital (SELV) / analogue (PTC/NTC/Pt1000)*	1 digital (SELV) / analogue (PTC/NTC/Pt1000)*
Connectivity:	TTL port for connection to Unicard/Copy Card or	TTL port for connection to Unicard/Copy Card or
	Televis <b>System</b> /ModBus monitoring device*	Televis <b>System</b> /ModBus monitoring device*
Digital outputs:	1 SPDT ½Hp 8(4)A 250V~	1 SPST 2Hp 12(12)A 250V~
Measurement range:	-55.0150.0°C	-55.0150.0°C
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C
Power consumption:	3W max	3W max
Power supply:	• 230V~ ±10% 50/60Hz	• 230V~ ±10% 50/60Hz
	• 12V~/== ±10% 50/60Hz	• 12V~/ ±10% 50/60Hz
HACCP:	present	present

<sup>\*(</sup>selectable by parameter).

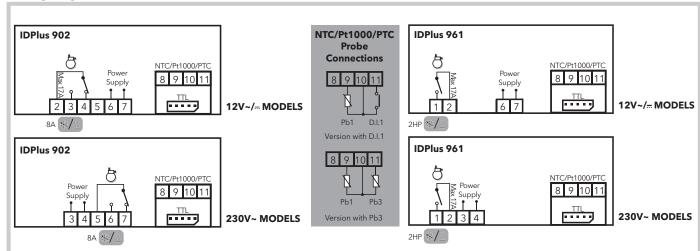

### IDPlus 971 - IDPlus 974

32x74 refrigeration thermostats



















Codes	Description	Relay capacity	Power supply
IDP29DB7*0000	IDPlus 971 NTC	2Hp/8A	230V~
IDP29DB3*0000	IDPlus 971 NTC	2Hp/8A	12V~/ <del></del>
IDP2ED07*0000	IDPlus 974 NTC	2Hp/8A/5A	230V~
IDP2ED03*0000	IDPlus 974 NTC	2Hp/8A/5A	12V~/ <del></del>

<sup>\*</sup>The number or letter in this position indicates the languages available for the code:  $0{=}1T; A{=}GR; C{=}CZ; E{=}EN; F{=}FR; G{=}DE; I{=}FI; L{=}FL; N{=}NL; O{=}PO; P{=}PT; R{=}RU; S{=}ES; T{=}TR; D{=}PU; D{=}$ W=SV; Y=NO; Z=PT(BR).

#### **Applications**

Controllers in the IDPlus 971 range are new-generation devices suitable for static refrigeration units at normal and low temperatures; controllers in the IDPlus 974 range are suitable for static and ventilated refrigeration units at low temperatures. IDPlus 971 and 974 controllers are equipped with the following functions: Deep Cooling Cycle (advanced algorithm that allows the quick chilling of the temperature), Easy Map (function that allows multiple preloaded machine configurations) and Condenser Over Heating (function that allows monitoring of the compressor discharge temperature and notifying of the need for maintenance of the condenser).


#### **Common features**

Appearance	New front design	
Display	Simplified user interface	
Configuration	4 default configurations included, selectable and	
	restorable	
Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	
	display window, thermoplastic resin buttons	
Dimensions	front panel 74x32mm, depth 59mm	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	
	drilling template	

Operating temperature	-555°C
Storage temperature	-3085°C
Ambient humidity for	
operation and storage	1090% RH (non-condensing)
Function	HACCP, DCC, Easy Map, COH
Connectivity	can be connected to Televis <b>System</b> and
-	ModBus
Accessories	New USB/TTL Unicard for uploading/
	downloading parameters

Technical data	IDPlus 971	IDPlus 974
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C	• PTC probe: -55.0140.0 °C
	• Pt1000 probe: -55.0150.0 °C	• Pt1000 probe: -55.0150.0 °C
Display:	with decimal point * 3 digits + sign	with decimal point * 3 digits + sign
Analogue inputs:	2 PTC / NTC / Pt1000 *	2 PTC / NTC / Pt1000 *
Configurable inputs:	1 digital (SELV) / analogue (PTC/NTC/Pt1000)*	1 digital (SELV) / analogue (PTC/NTC/Pt1000)*
	1 digital (SELV) / serial TTL*	1 digital (SELV) / serial TTL*
Connections:	TTL port for connection to Unicard/Copy Card or	TTL port for connection to Unicard/Copy Card or
	Televis <b>System</b> /ModBus monitoring device*	Televis <b>System</b> /ModBus monitoring device*
Digital outputs:	1 SPDT ½Hp 8(4)A 250V~	1 SPDT ½ Hp 8(4)A 250 V~
	1 SPST 2 Hp 12(12)A 250 V~	1 SPST 2 Hp 12(12)A 250 V~
		1 SPST 5(2)A 250V~
Measurement range:	-55.0150.0°C	-55.0150.0°C
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C
Power consumption:	3W max	3W max
Power supply:	• 230V~ ±10% 50/60Hz	• 230V~ ±10% 50/60Hz
	• 12V~/== ±10% 50/60Hz	• 12V~/ ±10% 50/60Hz
Buzzer:	present	optional
HACCP:	present	present

<sup>\*</sup> selectable by parameter

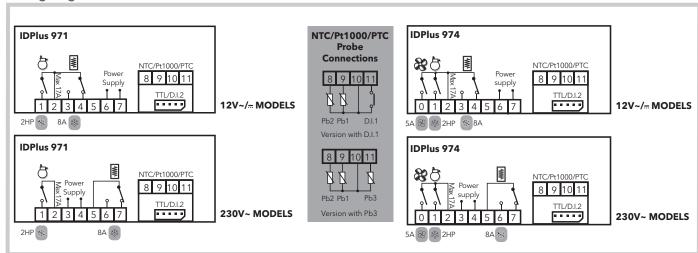

### **IDPlus 978**

#### 32x74 refrigeration thermostats



















1711	0
	SET
elivel	IDPles 974

Codes	Description	Relay capacity	Power supply
IDP24DB7*0000	IDPlus 978 NTC	1.5Hp	230V~

<sup>\*</sup>The number or letter in this position indicates the languages available for the code: 0=IT; E=EN; F=FR; G=DE; R=RU; S=ES; Z=PT(BR).

#### **Applications**

Controllers in the IDPlus 978 range are new-generation devices suitable for small and medium-sized mono-blocks. IDPlus 978 controllers are equipped with the following functions: Deep Cooling Cycle (advanced algorithm that allows the quick chilling of the temperature), Easy Map (function that allows multiple preloaded machine configurations) and Condenser Over Heating (function that allows monitoring of the compressor discharge temperature and notifying of the need for maintenance of the condenser).


#### **Common features**

Appearance	New front design
Display	Simplified user interface
Configuration	4 default configurations included, selectable and
	restorable
Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate
	display window, thermoplastic resin buttons
Dimensions	front panel 74x32mm, depth 59mm
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)
	drilling template

Operating temperature	-555°C	
Storage temperature	-3085°C	
Ambient humidity for		
operation and storage	1090% RH (non-condensing)	
Function	HACCP, DCC, Easy Map, COH	
Connectivity	can be connected to Televis <b>System</b> and	
	ModBus	
Accessories	New USB/TTL Unicard for uploading/	
	downloading parameters	

Technical data	IDPlus 978
Display range:	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C
	• Pt1000 probe: -55.0150.0 °C
Display:	with decimal point * 3 digits + sign
Analogue inputs:	2 PTC / NTC / Pt1000 *
Configurable inputs:	1 digital (SELV) / analogue (PTC/NTC/Pt1000)*
	1 digital (SELV) / serial TTL*
Connections:	TTL port for connection to Unicard/Copy Card or Televis <b>System</b> /ModBus monitoring device*
Digital outputs:	1 SPDT ½ Hp 8(4)A 250 V~
	1 SPST 5A 250 V~
	1 SPST 1.5HP 10(6)A 250V~
	1 SPST 5A 250 V~
Measurement range:	-55.0150.0°C
Accuracy:	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C
Power consumption:	3W max
Power supply:	• 230V~ ±10% 50/60Hz
	• 12V~/== ±10% 50/60Hz
Buzzer:	present
HACCP:	present

<sup>\*</sup> selectable by parameter

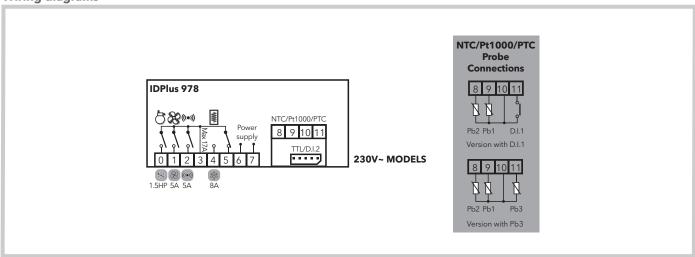

### ICPlus 902

#### 32x74 cold/hot thermostats













Codes	Descr.	Probe*	Power supply
ICP11D0750000	ICPlus 902 NTC-PTC 230V	NTC/PTC	230V~
ICP11D0450000	ICPlus 902 NTC-PTC 12/24V~/ <del></del>	NTC/PTC	1224V~/1236V <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**

ICPlus 902 controllers are one-step electronic devices, used to control temperature. They are compatible with Televis **System** and with ModBus protocol monitoring systems.


#### **Common features**

Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	Operating temperature	-555°C
	display window, thermoplastic resin buttons	Storage temperature	-3085°C
Dimensions	front panel 74x32mm, depth 59mm	Ambient humidity for	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		-

Technical data	ICPlus 902 NTC/PTC
Display range:	• NTC probe: -50.0110.0 °C
	• PTC probe: -50.0140.0°C
Display:	no decimal point *
	3 and a half digits + sign
Analogue inputs:	1 PTC or NTC *
Digital inputs:	not available
Connections:	TTL port for connection to USB Unicard, Televis <b>System</b> and systems with ModBus protocol
Digital outputs:	1 SPDT 8(4)A 250V~
Measurement range:	from -50 to 140
Accuracy:	better than 0.5% of end of scale+1 digit
Resolution:	0.1 or 1°C
Power consumption:	• 3W for 1224V~ model
	• 3W for 230V~ model
Power supply:	• 12V~ , 24V~ ,1224V~/1236V <del></del> (°) ±10% 50/60Hz
	• 115V~/230V~ ±10% 50/60Hz

<sup>\*</sup> selectable by parameter (°) non-insulated power supply

#### Wiring diagrams

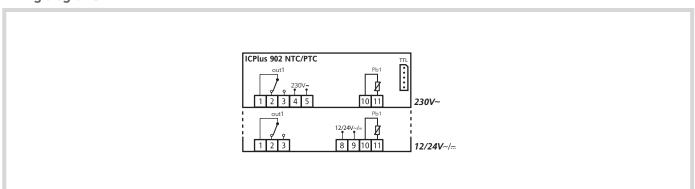

ICPlus 902

### ICPlus 915

#### 32x74 cold/hot thermostats





















Codes	Descr.	Probe*	Power supply
ICP22JI750000	ICPlus 915 J/K PT100 230V	J/K PT100	230V~
ICP22JI450000	ICPlus 915 J/K PT100 12/24V~/ <del></del>	J/K PT100	1224V~/1236V <del></del>
ICP22DI750000	ICPlus 915 NTC-PTC 230V	NTC/PTC	230V~
ICP22DI450000	ICPlus 915 NTC-PTC 12/24V~/ <del></del>	NTC/PTC	1224V~/1236V <del></del>
ICP22I0750000	ICPlus 915 V/I 230V	V/I	230V~
ICP22I0450000	ICPlus 915 V/I 12/24V~/ <del></del>	V/I	1224V~/1236V <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**

IC Plus 915 controllers are electronic two-step devices, either dependent or independent or with neutral zone, used for the control of temperature, relative humidity and pressure. They are compatible with Televis**System** and with Modbus protocol monitoring systems.


#### **Common features**

Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	Operating temperature	-555°C
	display window, thermoplastic resin buttons	Storage temperature	-3085°C
Dimensions	front panel 74x32mm, depth 59mm	Ambient humidity for	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		

Technical data	ICPlus 915 NTC/PTC	ICPlus 915 V/I	ICPlus 915 TC/Pt100
Display range:	• NTC probe: -50.0110.0 °C	• -199199 *	• Pt100 probe: -150650 °C
	• PTC probe: -50.0140.0°C	• -199.9199.9 *	• TcJ probe: -40750 °C
		• -19991999 *	• TcK probe: -401350 °C
Display:	no decimal point *	no decimal point *	no decimal point *
	3 and a half digits + sign	3 and a half digits + sign	3 and a half digits + sign
Analogue inputs:	1 PTC or NTC *	1 V-I (01V,05V,010V,020mA,420mA)*	1 Pt100 or 1 TcJ/TcK
Digital inputs:	1 clean contact at extra low	not available	1 clean contact at extra low
	safety voltage		safety voltage
Connections:	TTL port for connection to USB	TTL port for connection to USB	TTL port for connection to USB
	Unicard, Televis <b>System</b> and systems	Unicard, Televis <b>System</b> and systems	Unicard, Televis <b>System</b> and systems
	with ModBus protocol	with ModBus protocol	with ModBus protocol
Digital outputs:	1 SPDT 8(4)A 250V~ +	1 SPDT 8(4)A 250V~ +	1 SPST 8(4)A 250V~ +
	1 SPST 8(4)A 250V~	1 SPST 8(4)A 250V~	1 SPST 8(4)A 250V~
Measurement range:	from -50 to 140	from -999 to 1000	from -150 to 1350
Accuracy:	better than 0.5% of end of	better than 0.5% of end of	Pt100:0.5% for whole scale + 1 digit,
	scale+1 digit	scale+1 digit	0.2% from -150 to 300°C
			TcJ: 0.4% for whole scale + 1 digit
			TcK: 0.5% for whole scale + 1 digit,
			0.3% from -40 to 800°C
Resolution:	0.1 or 1°C	0.1 or 1°C	Pt100:0.1°C (0.1°F) up to199.9°C,
			1°C (1°F) over
			TcJ: 0.1°C (0.1°F) up to 199.9°C
			1°C (1°F) over
			TcK: 0.1°C (0.1°F)
Power consumption:	• 3W for 1224V~ model	• 3W for 1224V~ model	• 3W for 1224V~ model
	• 3W for 230V~ model	• 3W for 230V~ model	• 3W for 230V~ model
Power supply:	• 12V~, 24V~,1224V~/1236V <del></del> (°)	• 12V~, 24V~,1224V~/1236V <del></del> (°)	• 12V~, 24V~,1224V~/1236V <del></del> (°)
	±10% 50/60Hz	±10% 50/60Hz	±10% 50/60Hz
	• 115V~/230V~ ±10% 50/60Hz	• 115V~/230V~ ±10% 50/60Hz	• 115V~/230V~ ±10% 50/60Hz

<sup>\*</sup> selectable by parameter (°) non-insulated power supply

### Wiring diagrams

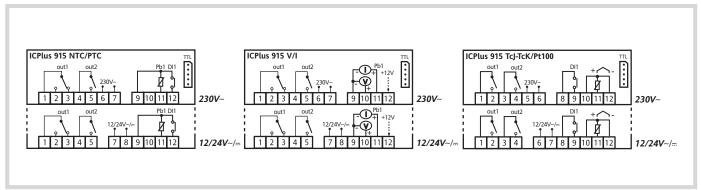

ICPlus 915

### **IC 917/PID (SSR)**

PID 32x74 cold/hot thermostats

















Codes	Description	Probe*	Power supply
IC12DI0TMD700	IC 917/PID	NTC/PTC	230V~
IC12ZI0TMD700	IC 917/PID	TC/Pt100	230V~
IC1RDI0TMD700	IC 917/PID SSR	NTC/PTC	230V~
IC1RZI0TMD700	IC 917/PID SSR	TC/Pt100	230V~

<sup>\*</sup>selectable by parameter

#### **Applications**


IC 917 controllers are electronic two-step devices, either dependent or independent, ON/OFF action, PD, PID, Soft Start function and Autotuning

#### **Common features**

Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	Operating temperature	-555°C
	display window, thermoplastic resin buttons	Storage temperature	-3085°C
Dimensions	front panel 74x32mm, depth 59mm	Ambient humidity for	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template	Soft Start Function	present

Technical data	IC 917/PID NTC/PTC (SSR)	IC 917/PID TC/Pt100 (SSR)
Display range:	• NTC probe: -50.0110.0 °C	• Pt100 probe: -150650 °C
	• PTC probe: -55.0140.0 °C	• TcJ probe: -40750 °C
		• TcK probe: -401350 °C
Display:	3 and a half digits + sign	3 and a half digits + sign
Analogue inputs:	1 PTC or NTC *	1 Pt100 or 1 TcJ/TcK*
Digital inputs:	1 clean contact at extra low safety voltage	1 clean contact at extra low safety voltage
Connections:	TTL port for connection to Copy Card	TTL port for connection to Copy Card
Digital outputs:	1 SPDT 8(3)A 1/2hp 250V~ • 1 SPST 8(3)A 1/2hp 250V~	2 SPST 8(3)A 1/2hp 250V~
	SSR models: please see wiring diagram	SSR models: please see wiring diagram
Measurement range:	from -55 to 140°C	from -150 to 1350°C
Accuracy:	better than 0.5% of end of scale+1 digit	Pt100:0.5% for whole scale + 1 digit,
		0.2% from -150 to 300°C
		TcJ: 0.4% for whole scale + 1 digit
		TcK: 0.5% for whole scale + 1 digit,
		0.3% from -40 to 800°C
Resolution:	0.1°C (0.1°F) up to 199.9°C, 1°C (1°F) over	Pt100: 0.1°C (0.1°F) up to 199.9°C, 1°C (1°F) over
		TcJ: 0.1°C (0.1°F) up to 199.9°C, (1°F) over
		TcK: 0.1°C (0.1°F)
Power consumption:	• 1.5W for 12V~ model	• 1.5W for 12V~ model
	• 3W for 230V~ model	• 3W for 230V~ model
Power supply:	• 12V~/ ±10% 50/60Hz	• 12V~/ ±10% 50/60Hz
	• 230V~ ±10% 50/60Hz	• 230V~ ±10% 50/60Hz
Alarm:	optional	optional

<sup>\*</sup> selectable by parameter

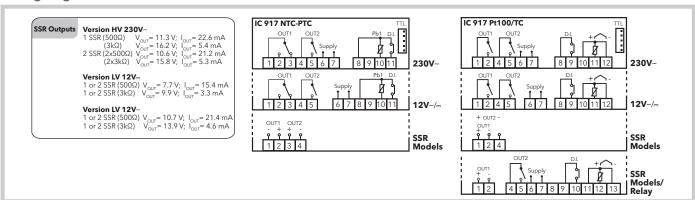

### **EM300 LX**

#### Temperature, humidity, pressure indicators





















Codes	Description	Probe*	Power supply
TM10D00X0D700	EM300 LX	NTC/PTC	230V~
TM10Z00X0M700	EM300 LX	Pt100/TC	230V~
TM10I00X0M700	EM300 LX I	420mA/020mA	230V~
TM10Z00X0M400	EM300 LX	Pt100/TC	1224V~/1236V <del></del>
TM10D00X0D300	EM300 LX	NTC/PTC	12V~
TM10I00X0M300	EM300 LX I	420mA	12V~

<sup>\*</sup>selectable by parameter

#### **Applications**


 $The \ EM300 \ LX \ is \ a \ device for \ measuring \ temperature, \ humidity \ and \ pressure \ in \ commercial \ refrigeration \ and \ industrial \ applications.$ 

#### **Common features**

Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	Installation	panel mounting with 71x29mm drilling
	display window, thermoplastic resin buttons		template (+0.2/-0.1mm)
Dimensions	front panel 32x74mm, depth 30mm (no terminals);	Operating temperature	-555°C
	'switching' models: depth 59mm	Storage temperature	-3085°C
		Ambient humidity for	
		use and storage	1090% RH (non-condensing)

Technical data	EM300 LX PTC/NTC	EM300 LX V/I	EM300 LX Pt100/TCJ/TCK
Display range:	• NTC probe: -50.0 110.0°C	• -99 100 *	• Pt100 probe: -200800 °C
	• PTC probe: -55.0 140.0°C	• -99.9 100.0 * • 999 1000 *	• TCJ probe: -40760 °C • TCK probe: -401350 °C
Display:	no decimal point *	no decimal point *	no decimal point *
Display.	3 and a half digits + sign	3 and a half digits + sign	3 and a half digits + sign
Analogue inputs:	1 NTC or PTC *	1 voltage input (0-1V, 0-5V, 0-10V) 1 current input (0-20mA, 4-20mA)	o ana a nan angua v ong
Measurement range:	from -55 to 140°C	from -999 to 1000	
Accuracy:	better than 0.5% of end of	better than 0.5% of end of	Pt100: 0.5% / 0.2% from -150 a 300°C
	scale + 1 digit	scale + 1 digit	TCJ: 0.4%
			TCK: 0.5% / 0.3% from -40 a 800°C
Resolution:	1 or 0.1°C	1 or 0.1°C	Pt100: 0.1°C up to 199.9, 1°C
			TCJ and TCK: 1 °C
Power consumption:	• 230V~ model: 1.8 W max	• 230V~ model: 1.8 W max	• 230V~ model: 1.8 W max
	• 12V~model: 0.5 W max	• 12V~model: 0.5 W max	• 12V~model: 0.5 W max
	• 1224V~model: 3 W max		• 1224V~model: 3 W max
Power supply:	• 230V~ ±10% 50/60 Hz	• 230V~ ±10% 50/60 Hz	• 230V~ ±10% 50/60 Hz
	• 12V~ ±10% 50/60 Hz	• 12V~/ ±10% 50/60 Hz	• 12V~ ±10% 50/60 Hz
	• 1224V~/== ±10% 50/60 Hz		• 1224V~/1236V <del></del> ±10% 50/60Hz
Connections:	TTL port for connection to	TTL port for connection to	TTL port for connection to
	Copy Card and Televis <b>System</b>	Copy Card and Televis <b>System</b> **	Copy Card and Televis <b>System</b> **

<sup>\*</sup> selectable by parameter \*\* use BusAdapter 150

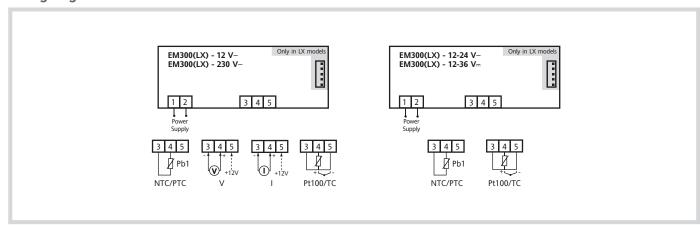

### **EWTL 300 - EWTL 310 - DST-30**

#### **LCD** thermometers





Codes		Description	Probe cable length
T1M1BT0107	(A)	EWTL 300	1,5m
T1M1BT0109	(B)	EWTL 310	1,5m
T1M1BT0105	(C)	DST-30	1m
AT111120		EWTL300 32x64 Adapter	

#### **Applications**


The EWTL 300/310 is a range of LCD digital temperature gauges with temperature probes connected to the instrument via a cable of length 1.5, 2 or 3 metres. An adapter that allows to replace 32x64 mm front tools (with 24.5x58 template hole mm) with the EWTL 300 thermometer is available. DST-30 is a solar-cell thermometer specifically designed for refrigerated counters and display units.

#### **Common features**

Installation panel-mounted

Technical data	<b>EWTL 300</b>	EWTL 310	DST-30
Display:	LCD with 2 and 1/2 digits	LCD with 2 and 1/2 digits	24x14mm LCD
Resolution:	0.1 °C	0,1 °C (1°C <20°C)	0.1°C
Accuracy:	±1°C	±1°C	±1°C
Probe:	connected to instrument, cable length	connected to instrument, cable length	connected to instrument, cable length
	1.5m	0.5 m, 1 m, 2 m or 3 m	1m
Display refresh:	10 seconds	12 seconds	
Display range:	-5070°C (-58158 °F)	-5070°C (-58158 °F)	-2080°C
Dimensions:	front panel 48x28.6 mm	front panel 62.2x29.2 mm	front panel 66x30 mm
	depth 13 mm	depth 16.2 mm	depth 11.6 mm
Mounting:	46x26.6 mm	58x25 mm	57x25.6 mm
Power supply:	two 1.5V LR 44 batteries or equivalent -	one 1.5V LR 44 battery or equivalent -	integrated solar cells
	duration 12 months	duration 12 months	
Protection rating:			IP68

#### **Dimensions**

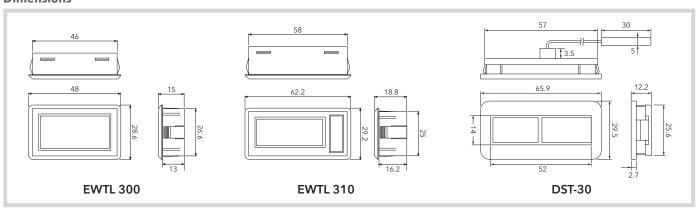

### **EWDR 981- EWDR 984**

#### **DIN** controllers for refrigeration











Codes	Description	Probe*	Power supply
DR26DI0TCD700	EWDR 981	NTC/PTC	230V~
DR3CDI0TCD700	EWDR 984	NTC/PTC	230V~

<sup>\*</sup>selectable by parameter

#### **Applications**


The EWDR range of products, available in a 4 DIN module size (70x85mm), is designed for applications requiring controllers installed on DIN rails Omega, such as electrical panels for cold rooms or applications with centralised electrical panels.

#### **Common features**

Container	plastic casing with 4 DIN modules	Ambient humidity for	
Dimensions	front panel 70x85mm, depth 61mm	operation and storage	1090% RH (non-condensing)
Installation	on DIN rail (Omega) or wall mounted	Connections	on screw-on terminal block for ≤ 2.5mm²
Operating temperature	-555°C		wires (just one wire per terminal for power
Storage Temperature	-3085°C		connections)

Technical data	EWDR 981	EWDR 984
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C	• PTC probe: -55.0140.0 °C
Display:	no decimal point * 3 and a half digits + sign	no decimal point * 3 and a half digits + sign
Analogue inputs:	2 PTC or NTC *	3 PTC or NTC *
Digital inputs:	2 voltage-free inputs *	2 voltage-free inputs *
Connections:	TTL port for connection to Copy Card	TTL port for connection to Copy Card
Digital outputs:	1 SPDT 15A 1hp 250V~	1 SPDT 8(3)A 250V~
		1 SPST 15A 1hp 250V~
		1 SPST 8(3)A 250V~
Analogue outputs:	12V/24mA output *	12V/24mA output *
Measurement range:	from -55 to 140 °C	from -55 to 140 °C
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C
Power consumption:	5VA max	5VA max
Power supply:	230V~ ±10% 50/60Hz	230V~ ±10% 50/60Hz

<sup>\*</sup> selectable by parameter

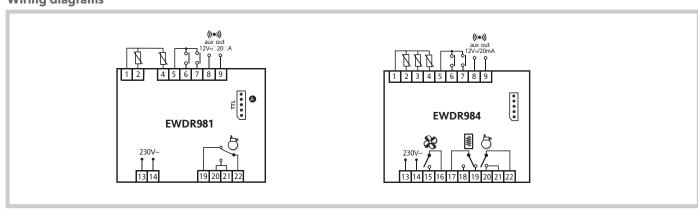

### **EWDR 983 LX/S - EWDR 985 LX/S/C/K**

#### **DIN controllers for remote counters**















00000	00000
- H	8.0
860	6 B
60000	

Codes	Description	Probe*	Power supply
DR38DI0TCD700	EWDR 983	NTC/PTC	230V~
DR38DF0SCD700	EWDR 983/CS LX	NTC/PTC	230V~
DR34DI0TCD700	EWDR 985	NTC/PTC	230V~
DR35DR0SCD700	EWDR 985/CS LX BUZ.	NTC/PTC	230V~

<sup>\*</sup>selectable by parameter

#### **Applications**

The EWDR range of products, available in a 4 DIN module size (70x85mm), is designed for applications requiring controllers installed on DIN rails Omega, such as electrical panels for cold rooms or applications with centralised electrical panels.


The EWDR 983 LX and EWDR 985 LX devices are equipped with an internal clock (RTC) for the management of the defrostings and the RS-485 serial port for the connection to Televis**System**.

#### **Common features**

Container	plastic casing with 4 DIN modules	Ambient humidity for	
Dimensions	front panel 70x85mm, depth 61mm	operation and storage	1090% RH (non-condensing)
Installation	on DIN rail (Omega) or wall mounted	Connections	on screw-on terminal block for ≤ 2.5mm²
Operating temperature	-555°C		wires (just one wire per terminal for power
Storage temperature	-3085°C		connections)

Technical data	EWDR 983 LX/S	EWDR 985 LX/S/C/K
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C	• PTC probe: -55.0140.0 °C
Display:	no decimal point * 3 and a half digits + sign	no decimal point * 3 and a half digits + sign
Analogue inputs:	3 PTC or NTC *	3 PTC or NTC *
Digital inputs:	2 voltage-free inputs *	2 voltage-free inputs *
Connections:	TTL port for connection to Copy Card	TTL port for connection to Copy Card
	RS 485 for connection to Televis <b>System</b>	RS 485 for connection to Televis <b>System</b>
Digital outputs:	1 SPDT 8(3)A 250V~	1 SPST 8(3)A 1/2hp 250V~
	1 SPDT 15A 1hp 250V~	1 SPDT 8(3)A 1/2hp 250V~
		1 SPST 15A 1hp 250V~
		1 SPST 8(3)A 1/2hp 250V~
Analogue outputs:	12V/24mA output *	12V:::/24mA output *
Measurement range:	from -55 to 140 °C	from -55 to 140 °C
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C
Power consumption:	5VA max	5VA max
Power supply:	230V~ ±10% 50/60Hz	230V~ ±10% 50/60Hz
Link:	not available	available
Clock:	available	available

<sup>\*</sup> selectable by parameter

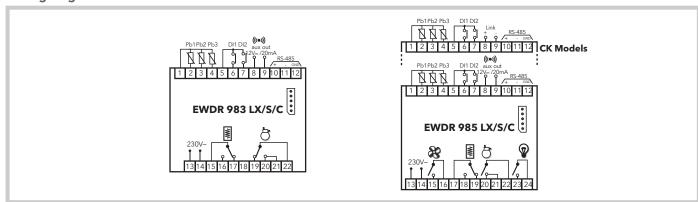

### **DR4020**

### Universal DIN controllers















Codes	Description	Probe*	Power supply
E4D12E00BH710	DR4020	Pt100	100240V~
E4D12A00BD710	DR4020	TC	100240V~
E4D12I00BN710	DR4020	V/I/Pt100	100240V~
E4D12N00BH710	DR4020	NTC/PTC/Pt1000	100240V~
E4D12E00BH410	DR4020	Pt100	1224V~/ <del></del>
E4D12A00BD410	DR4020	TC	1224V~/ <del></del>
E4D12I00BN410	DR4020	V/I/Pt100	1224V~/ <del></del>
E4D12N00BH410	DR4020	NTC/PTC/Pt1000	1224V~/ <del></del>

<sup>\*</sup> selectable by parameter

#### **Applications**

The new Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging, to raw material transformation process control.


#### **Common features**

Container	plastic casing with 4 DIN modules	Operating temperature	-555°C
Dimensions	front panel 70x85mm, depth 61mm	Storage temperature	-2085°C
Installation	on DIN rail (Omega) or panel mounting, with	Ambient humidity for	
	70x45mm (+0.2/-0.1mm) drilling template	operation and storage	1090% RH (non-condensing)

Technical data	DR4020
Display:	no decimal point *
	2 4-digit displays + sign
Analogue inputs:	1 input* (see Probes diagram on Wiring Diagram)
Digital inputs:	not available
Connections:	TTL port for connection to Copy Card and Unicard
Digital outputs: 1 SPDT 8(3)A 250V~	
	1 SPST 8(3)A 250V~
Analogue output:	not available
Measurement range:	according to probe used
Accuracy:	according to probe used
Resolution:	according to probe used
Power consumption:	4W max
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz

<sup>\*</sup>selectable by parameter

#### Wiring diagrams

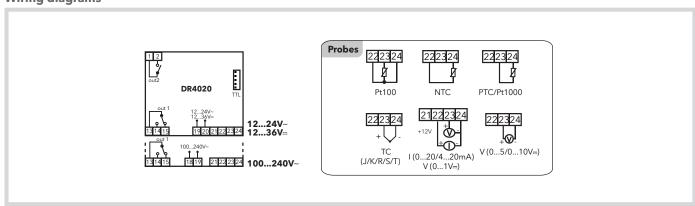

DR4020

### **DR4022**

#### **Universal DIN controllers with serial port**





















12.2			
TC	1 <mark>80</mark> 10. 1		
di./eii	nc set	<b>(</b>	
THE REAL PROPERTY.		6.11	

Codes	Description	Probe*	Power supply
E4D12EASBH710	DR4022	Pt100	100240V~
E4D12NASBH710	DR4022	NTC/PTC/Pt1000	100240V~
E4D12AASBD710	DR4022	TC	100240V~
E4D12IASBN710	DR4022	V/I/Pt100	100240V~
E4D12VASBN410	DR4022	V/I/Pt100	1224V~/ <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**


The new Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging to raw material transformation process control.

#### **Common features**

<b>Container</b> plastic casi	ng with 4 DIN modules	Operating temperature	-555°C
<b>Dimensions</b> front panel	70x85mm, depth 61mm	Storage temperature	-2085°C
<b>Installation</b> on DIN rail	(Omega) or panel mounting, with	Ambient humidity for	
70x45mm	(+0.2/-0.1mm) drilling template	operation and storage	1090% RH (non-condensing)

Technical data	DR4022
Display:	no decimal point *
	2 4-digit displays + sign
Analogue inputs:	1 input* (see Probes table)
Digital inputs:	1 clean contact at extra low safety voltage
Connections:	TTL port and internal RS-485 for connection to Copy Card, Unicard, Televis <b>System</b> and ModBus protocol systems
Digital outputs:	1 SPDT 8(3)A 250V~
	1 SPST 8(3)A 250V~
Analogue output:	V-I: 01V, 05V, 010V / 020mA, 420mA
Measurement range:	according to probe used
Accuracy:	according to probe used
Resolution:	according to probe used
Power consumption:	4W max
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz

<sup>\*(</sup>selectable by parameter)

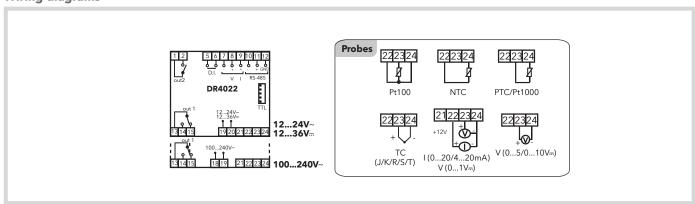

### **EW 4820 (SSR)**

#### **Universal 48x48 controllers**



















Codes	Description	Probe*	Power supply
E481BI0XBH700	EW4820	V/I/Pt100	100240V~
E481SI0XBN700	EW4820 SSR Output	V/I/Pt100	100240V~
E481BP0PMH700	EW4820	Pt100/Pt1000/NTC/PTC/TC	100240V~
E481SP0PMH700	EW4820 Uscita SSR	Pt100/Pt1000/NTC/PTC/TC	100240V~
E481BP0PMH400	EW4820	Pt100/Pt1000/NTC/PTC/TC	1224V~/ <del></del>
E481SP0PMH400	EW4820 SSR Output	Pt100/Pt1000/NTC/PTC/TC	1224V~/ <del></del>

<sup>\*</sup> selectable by parameter

#### **Applications**


The Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging to raw material transformation process control.

#### **Common features**

Container	PC+ABS UL94 V-0 resin plastic casing, switch keys	Operating temperature	-555°C
	with adhesive polycarbonate film	Storage temperature	-2085°C
Dimensions	front panel 48x48mm, depth 113mm	Ambient humidity for	
Installation	panel-mounting, with 45x45mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		

Technical data	EW 4820 (SSR)
Display:	no decimal point *
	2 4-digit displays + sign
Analogue inputs:	1 input* (see Probes table)
Digital inputs:	not available
Connections:	TTL port for connection to Copy Card or Televis <b>System</b>
Digital outputs:	1 SPDT 3A 250V~
	1 SPST 2A 250V~
Digital outputs - SSR models:	Vout = 012V <del></del> / Imax = 015mA / Vmin = 7,5V
	1 SPST 2A 250V~
Analogue output:	not available
Measurement range:	according to probe used
Accuracy:	according to probe used
Resolution:	according to probe used
Power consumption:	• 2.45W for 1224V~/1236V <del></del> model
	• 2.40W for 100240V~model
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz

<sup>\*(</sup>selectable by parameter)

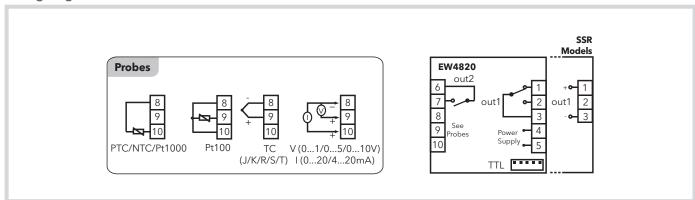

## EW 4822 (SSR)

#### Universal 48x48 controllers with serial port























Codes	Description	Probe*	Power supply
E481BIISBH700	EW4822 AO 420mA	V/I/Pt100	100240V~
E481BPIQMH700	EW4822 AO 020mA	Pt1000/Pt100/NTC/PTC/TC	100240V~
E481BPVQMH700	EW4822 AO 0/10V	Pt1000/Pt100/NTC/PTC/TC	100240V~
E481SPIQMH700	EW4822 AO 020mA SSR Output	Pt1000/Pt100/NTC/PTC/TC	100240V~
E481BPIQMH400	EW4822 AO 020mA	Pt1000/Pt100/NTC/PTC/TC	1224V∼/ <del></del>
E481SPIQMH400	EW4822 AO 020mA SSR Output	Pt1000/Pt100/NTC/PTC/TC	1224V~/ <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**


The Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging to raw material transformation process control.

#### **Common features**

Container	PC+ABS UL94 V-0 resin plastic casing, switch keys	Operating temperature	-555°C
	with adhesive polycarbonate film	Storage temperature	-2085°C
Dimensions	front panel 48x48mm, depth 113mm	Ambient humidity for	
Installation	panel-mounting, with 45x45mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		

Technical data	EW 4822 (SSR)
Display:	no decimal point *
11. 13.	2 4-digit displays + sign
Analogue inputs:	1 input* (see Probes table)
Digital inputs:	1 clean contact at extra low safety voltage
Connections:	TTL port for connection to Copy Card or TelevisSystem + internal RS-485 for connection to systems with ModBus protocol
Digital outputs:	1 SPDT 3A 250V~
	1 SPST 2A 250V~
Digital outputs - SSR models:	Vout = 012V <del></del> / Imax = 015mA / Vmin = 7,5V
	1 SPST 2A 250V~
Analogue output:	V: 01V, 05V, 010V or I: 020mA, 420mA
	maximum pilotable loads: please see wiring diagrams
Measurement range:	according to probe used
Accuracy:	according to probe used
Resolution:	according to probe used
Power consumption:	• 2.80W for 1224V~/1236V=model
	• 2.60 W for 100240V~model
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz

<sup>\*(</sup>selectable by parameter)

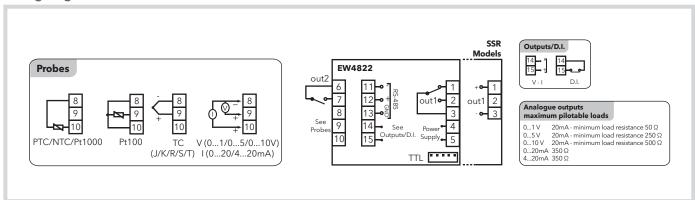

### EW7210 - EW7220

#### **Universal 72x72 controllers**



















Codes	Descr.	Probe*	Power supply
E7211A0XHD700	EW7210	TC	100240V~
E7211E0XHD700	EW7210	Pt100	100240V~
E7211N0XHD700	EW7210	NTC/PTC/Pt1000	100240V~
E7211A0XHD400	EW7210	TC	1224V~/ <del></del>
E7211E0XHD400	EW7210	Pt100	1224V~/ <del></del>
E7211N0XHD400	EW7210	NTC/PTC/Pt1000	1224V~/ <del></del>
E7212E0XBH700	EW 7220	Pt100	100240V~
E7212A0XBD700	EW 7220	TC	100240V~
E7212I0XBH700	EW 7220	V/I/Pt100	100240V~
E7212N0XBD700	EW 7220	NTC/PTC/Pt1000	100240V~
E7212E0XBH400	EW 7220	Pt100	1224V~/ <del></del>
E7212A0XBD400	EW 7220	TC	1224V~/ <del></del>
E7212I0XBH400	EW 7220	V/I/Pt100	1224V~/ <del></del>
E7212N0XBD400	EW 7220	NTC/PTC/Pt1000	1224V~/ <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**

The Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging to raw material transformation process control.


#### **Common features**


Container PC+ABS UL94 V-0 resin plastic casing, switch		
	with adhesive polycarbonate film	
Dimensions	front panel 72x72mm, depth 80mm	
Installation	panel mounting with 67x67mm (+0.2/-0.1mm)	
	drilling template	


Operating temperature	-555°C
Storage temperature	-2085°C
Ambient humidity for	
operation and storage	1090% RH (non-condensing)

Technical data	EW7210	EW 7220
Display:	no decimal point *	no decimal point *
	2 4-digit displays + sign	2 4-digit displays + sign
Analogue inputs:	1 input* (see Probes table)	1 input* (see Probes table)
Digital inputs:	not available	not available
Connectivity:	TTL port for connection to Copy Card, Televis <b>System</b> or	TTL port for connection to Copy Card, Televis <b>System</b> or
	systems with ModBus protocol	systems with ModBus protocol
Digital outputs:	1 SPDT 8(3)A 250V~	1 SPDT 8(3)A 250V~
		1 SPST 8(3)A 250V~
Analogue output:	not available	not available
Measurement range:	according to probe used	according to probe used
Accuracy:	according to probe used	according to probe used
Resolution:	according to probe used	according to probe used
Power consumption:	4W max	4W max
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz	• 100240V~ ±10% 50/60Hz

<sup>\*(</sup>selectable by parameter)







### EW7221 - EW7222

#### Universal 72x72 controllers with serial port























Codes	Descr.	Probe*	Power supply
E7213PAXBH700	Univ. EW7221	Pt100/Pt1000/NTC/PTC/TC	100240V~
E7213IAXBH700	EW7221	V/I/Pt100	100240V~
E7213PAXBD700	Univ. EW7221 - RS485	Pt100/Pt1000/NTC/PTC/TC	100240V~
E7213PAXBH400	Univ. EW7221	Pt100	1224V~/ <del></del>
E7213PASBH700	Univ. EW7222 -RS485	Pt100/Pt1000/NTC/PTC/TC	100240V~
E7213IASBH700	EW 7222	V/I/Pt100	100240V~
E7213PASBH400	Univ. EW7222 -RS485	Pt100/Pt1000/NTC/PTC/TC	1224V~/ <del></del>

<sup>\*</sup>selectable by parameter

#### **Applications**


The Eliwell thermoregulators in the Universal Controller series are ideal for all industrial applications requiring high precision temperature control, ranging from the moulding of plastic materials and packaging to raw material transformation process control.

#### **Common features**

Container	PC+ABS UL94 V-0 resin plastic casing, switch keys	Operating temperature	-555°C
	with adhesive polycarbonate film	Storage temperature	-2085°C
Dimensions	front panel 72x72mm, depth 80mm	Ambient humidity for	
Installation	panel mounting with 67x67mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		

Technical data	EW7221	EW 7222
Display:	no decimal point *	no decimal point *
	2 4-digit displays + sign	2 4-digit displays + sign
Analogue inputs:	1 input* (see Analogue Inputs table)	1 input* (see Probes table)
Digital inputs:	1 clean contact at extra low safety voltage	1 clean contact at extra low safety voltage
Connectivity:	TTL port for connection to Copy Card, Televis <b>System</b> or	TTL and RS-485 port for connection to Copy Card,
	systems with ModBus protocol	Televis <b>System</b> or to systems based on ModBus protocol
Digital outputs:	1 SPDT 8(3)A 250V~	1 SPDT 8(3)A 250V~
	1 SPST 8(3)A 250V~	1 SPST 8(3)A 250V~
	1 SPST 5A 250V~	1 SPST 5A 250V~
Analogue output:	V-I: 01V, 05V, 010V / 020mA, 420mA	V-I: 01V, 05V, 010V / 020mA, 420mA
Measurement range:	according to probe used	according to probe used
Accuracy:	according to probe used	according to probe used
Resolution:	according to probe used	according to probe used
Power consumption:	4W max	4W max
Power supply:	• 1224V~/1236V <del></del> ±10% 50/60Hz	• 1224V~/1236V <del></del> ±10% 50/60Hz
	• 100240V~ ±10% 50/60Hz	• 100240V~ ±10% 50/60Hz

<sup>\*(</sup>selectable by parameter)

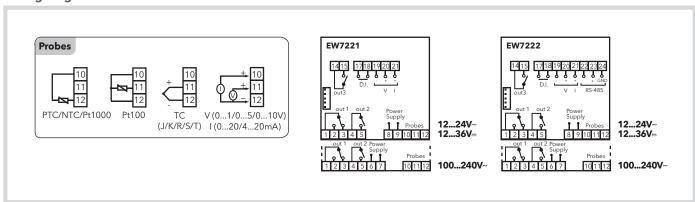

### **EWTS 950 LX - EWTS 990 LX**

32x74 timers and counters











Codes	Description	Power supply
ET010I0XTT700	EWTS 950 LX	230V~
ET020I0XTT700	EWTS 990 LX	230V~


#### **Applications**

The Eliwell series of digital timers is the ideal measuring solution for all measurable quantities in commercial refrigeration and light industry. The range, which consists of 2 different models, is used in all applications requiring precision control of processing stages and the management of functions linked to preset time intervals.

#### **Common features**

Container	PC+ABS UL94 V-0 plastic resin casing, polycarbonate	Operating temperature	-555°C
	display window, thermoplastic resin buttons	Storage temperature	-3085°C
Dimensions	front panel 32x74mm, depth 59mm	Ambient humidity for	
Installation	panel mounting with 71x29mm (+0.2/-0.1mm)	operation and storage	1090% RH (non-condensing)
	drilling template		

Technical data	<b>EWTS 950 LX</b>	EWTS 990 LX
Display range:	9999 hours / 99 hours and 59 minutes / 99 minutes and	9999 hours / 99 hours and 59 minutes / 99 minutes and
	59 seconds / 99 seconds and 99 hundredths of a second	59 seconds / 99 seconds and 99 hundredths of a second
Display:	no decimal point * 4 digits + sign	no decimal point * 4 digits + sign
Digital inputs:	2 clean contacts at extra low safety voltage	2 clean contacts at extra low safety voltage
Connections:	TTL port for connection to Copy Card and Televis <b>System</b>	TTL port for connection to Copy Card and Televis <b>System</b>
Digital outputs:	1 SPDT 8(3)A 1/2hp 250V~	1 SPDT 8(3)A 1/2hp 250V~
		1 SPST 8(3)A 1/2hp 250V~
Accuracy:	3.6 sec/h	3.6 sec/h
Power consumption:	3VA max	3V~ max
Power supply:	12V~/ or 230V~ ±10% 50/60Hz	12V~/ or 230V~ ±10% 50/60Hz
External battery:	• power supply 9V	• power supply 9V
	• battery duration: based on model, with 9V::-/10mA/h	<ul> <li>battery duration: based on model, with 9Vc/10mA/h</li> </ul>
	battery duration 1h	battery duration 1h
	• instrument absorption with power supply from	• instrument absorption with power supply from
	10mA battery	10mA battery

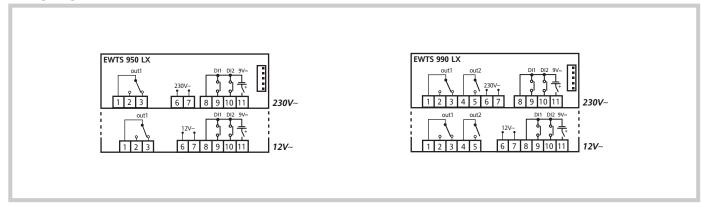

### **EWRC 300 LX - EWRC 500 LX**

#### **Control panels for cold rooms**



















Codes	Description	N.B
RCP3HDTX1H710	EWRC 300 LX removable	RTC/HACCP
RCP3UDTX1H710	EWRC 500 LX removable	RTC/HACCP
RCP3UDVX1H710	EWRC 500 LX removable	RTC/Main Switch
KP250110	Kit RS-485	

#### **Applications**

Controllers for static and ventilated cold rooms with single-phase compressors up to 2 hp for on-board installation.


 $The \ EWRC\ 300\ LX\ and\ EWRC\ 500\ LX\ have\ 3\ and\ 5\ outputs\ respectively\ on\ configurable\ relays\ for\ controlling\ all\ the\ room's\ accessory\ users.$ 

#### **Common features**

Front panel protection rating	IP54	Operating temperature	-550°C
Container	Bayblend FR110	Storage temperature	-2085°C
Dimensions	front panel 210x245mm, depth 90mm	Ambient operation	
Installation	wall-mounted	and storage humidity	1090% RH (non-condensing)

Technical data	EWRC 300 LX	EWRC 500 LX
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0150.0 °C	• PTC probe: -55.0150.0 °C
Display:	no decimal point * 2 displays: 3 digits + sign and 4 digits	no decimal point * 2 displays: 3 digits + sign and 4 digits
Analogue inputs:	3 x NTC/PTC *	3 x NTC/PTC *
Digital inputs:	2 clean contacts at extra low safety voltage*	2 clean contacts at extra low safety voltage*
Connections:	TTL port and RS-485 (with optional plug-in module) for connection to CopyCard, Televis <b>System</b> and systems based on ModBus protocol	TTL port and RS-485 (with optional plug-in module) for connection to CopyCard, Televis <b>System</b> and systems based on ModBus protocol
Digital outputs:	1 SPST 2Hp 12(12)A 250V~ 1 SPDT 1Hp 8(8)A 250V~ 1 SPST ½Hp 8(4)A 250V~	1 SPST 2Hp 12(12)A 250V~ 1 SPDT 1Hp 8(8)A 250V~ 1 SPST 250V~ 1 SPDT ½Hp 8(4)A 250V~ 1 SPST 1hp 8(8)A 250V~
Measurement range:	-55150°C	-55150°C
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C
Power supply:	230V~ ±10% 50/60Hz	230V~ ±10% 50/60Hz
Power consumption:	14W max	14W max
Power terminals:	removable terminals / 6.3mm faston upon request	removable terminals / 6.3mm faston upon request
HACCP:	optional	optional
Clock:	optional	optional
Power switch:	optional	optional

<sup>\* (</sup>selectable by parameter)

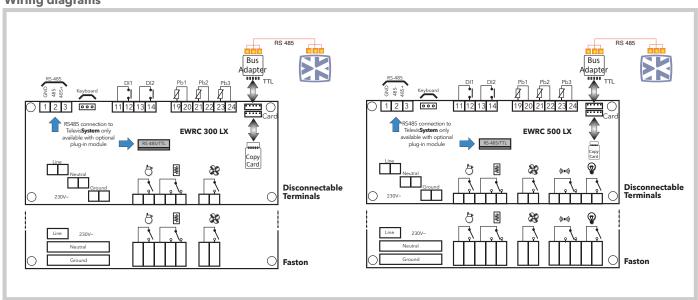

### EWCM 4120 - 4150 - 4180

32x74 controllers for compressor racks















Codes	Description	Power supply
EM6A12001EL10	EWCM4120 /C	12V~
EM6A12001EL11	EWCM4120 /C with wires	12V~
EM6A22105EL10	EWCM4150 /C	12V~
EM6A22105EL11	EWCM4150 /C with wires	12V~
EM6A22101EL10	EWCM4180 /C	12V~
EM6A22101EL11	EWCM4180 /C with wires	12V~

EM6A12001EL16	KIT EWCM 4120/C	see kit table	
EM6A22101EL16	KIT EWCM 4180/C	see kit table	

#### **Applications**


The EWCM 4000 range, which consists of three different controllers, is the ideal solution for small and medium-sized compressor racks, where ease of use, high control reliability and versatility are essential features for meeting all operational requirements in compressor rack management.

#### **Common features**

Display	4 figure LED	Operating temperature	-560°C
Container	plastic casing, flame retardant grade UL94-V0	Storage temperature	-2085°C
Dimensions	front panel 32x74mm, depth 70mm	Ambient humidity for	
Installation	panel-mounted, with 71x29mm hole	operation and storage	1090% RH (non-condensing)

Technical data	EWCM 4120	EWCM 4150	EWCM 4180
Analogue inputs:	2 420mA / ratiometric 05V /	2 420mA / ratiometric 05V /	2 420mA / ratiometric 05V /
	010V / NTC / D.I.*	010V / NTC / D.I.*	010V / NTC / D.I.*
Digital inputs:	7 SELV contacts	7 SELV contacts	7 SELV contacts
Analogue outputs:	• TRIAC	-	-
	• PWM - Open Collector	• 2 PWM - Open Collector	• 2 PWM - Open Collector
	-	• 010V / 420mA / 020mA*	• 010V / 420mA / 020mA*
Digital outputs:	4 SPST 2A 250V~ + Open Collector	5 SPST 2A 250V~ + Open Collector	5 SPST 2A 250V~ + Open Collector
Connections:	TTL port for connection to Copy Card	TTL port for connection to Copy Card	TTL port for connection to Copy Card
	and Televis <b>System</b> via	and Televis <b>System</b> via	and Televis <b>System</b> via
	optional module	optional module	optional module
Clock:	present	present	present
Power consumption:	5VA max	5VA max	5VA max
Power supply:	12V~ ±10% 50/60Hz	12V~ ±10% 50/60Hz	12V~ ±10% 50/60Hz
* (selectable by parameter)			

(screetable by parameter)		
KIT		
Code	Description	Details
EM6A12001EL16	EWCM 4120/C KIT	1 x EM6A12001EL11 - EWCM 4120/C with wires
		1 x TF411200 - transformer 230/12 5VA shielded
		1 x TD400030 - EWPA 030 R 0/5V 0/30BAR Ratiometric transd.
		1 x TD400010 - EWPA 010 R 0/5V 0/10BAR Ratiometric transd.
		2 x CO000027 - WIR. EWPA 1m R 0/5V Wir. for ratiometric transd.
EM6A22101EL16	EWCM 4180/C KIT	1 x EM6A22101EL11- EWCM 4180/C with wires
		1 x TF411200 - transformer 230/12 5VA shielded
		1 x TD400030 - EWPA 030 R 0/5V 0/30BAR Ratiometric transd.
		1 x TD400010 - EWPA 010 R 0/5V 0/10BAR Ratiometric transd.
		2 x CO000027 - WIR. EWPA 1m R 0/5V Wir. for ratiometric transd.

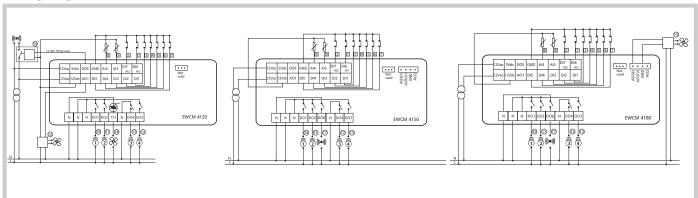

### **EWCM 8900 - 9100 EO**

#### **DIN controllers for compressor racks**





















Codes	Description	Details
EM32AG2*0GH00	EWCM 8900 EO	13 DIN
EM32BH2*0GH00	EWCM 9100 EO	13 DIN
EMK0000B0G000	spare keyboard ENG/IT	A
CO000029	3m cable keyboard-bas	е
CCA0BUI02N000	USB Copy Card	

 $<sup>{}^{\</sup>star}$ The letter in this position indicates the languages available for the code:

#### **Applications**

 $The new series of controllers EWCM EO \ (Environmentally Optimised) for compressor racks provides a single solution to temperature control in refrigeration systems.\\$ The external keyboard with graphic LCD and the rapid parameter setting menu give greater accessibility and make it easier for the operator to configure parameters and access data. Energy saving is guaranteed thanks to the dedicated control algorithms.


- Sub-critical CO<sub>2</sub> management, glycol, R290 and R427 rooms
- Rooms managed in cascade by plug&play V910 module
- Advanced management of rooms with inverter
- Rapid configuration tool for PC DeviceManager

Updates for glossaries, applications, and the always updated list of compatible refrigerants are available in the reserved area of www.eliwell.com.

#### **Common features**

Insulation Class	2	Connector for base-keyboard	
Operating temperature	-555°C	connection	rapid 6-way connector
Storage Temperature	-3085°C	Compatible refrigerants	R22, R134a, R502, R404A, R407C, R507,
Ambient humidity of	1090% RH (non-condensing)		R717 (Ammonia), R410A, R417a, R744
use and storage			(CO2), R407A, 407F, R290 (Propane), R427,
			R600A (Isobutane), R23

Technical data	EWCM 8900	EWCM 9100
Container	PC+ABS UL94 plastic resin casing	PC+ABS UL94 plastic resin casing
	V-0 13 DIN modules (227.5x110x60mm)	V-0 13 DIN modules (227.5x110x60mm)
Mounting:	on DIN Omega bar support	on DIN Omega bar support
Analogue inputs:	4 NTC/NTC extended/PTC/D.I.+	4 NTC/NTC extended/PTC/D.I.+
	2 high precision current (420mA / 05V / 010V)	2 high precision current (420mA / 05V / 010V)
Digital inputs	6 voltage (100240V~)	10 voltage (100240V~) +
		4 configurable voltage-free
Analogue outputs:	2 voltage/current (010V/420mA)	2 voltage/current (010V/420mA)
Digital outputs:	6 SPST 5(2)A 250V~ +	11 SPST 5(2)A 250V~ +
	1 SPDT 8(3)A 250V~	2 SPDT 8(3)A 250V~
Connections:	• TTL port for connection to CopyCard USB	TTL port for connection to CopyCard USB
	• RS-485 for connection to Televis <b>System</b> and systems	• RS-485 for connection to Televis <b>System</b> and systems
	based on the ModBus protocol	based on the ModBus protocol
	• RS-485 EXP for connection to pulse/stepper (V800/V910) driver	• RS-485 EXP for connection to pulse/stepper (V800/V910) driver
Display:	LCD on external keyboard	LCD on external keyboard
Functions:	inverter control both in suction and discharge	inverter control both in suction and discharge
Clock:	present	present
Power consumption:	20W	20W
Power supply:	100240V~ ±10% 50/60Hz	100240V~ ±10% 50/60Hz

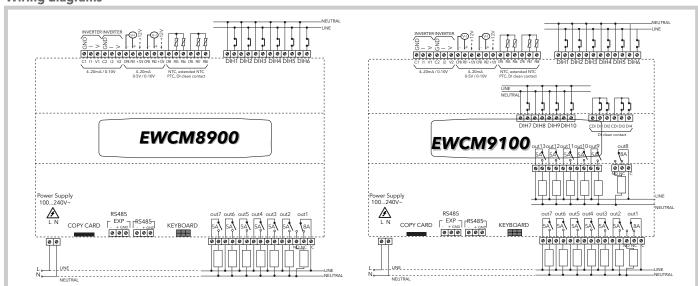

in A: ITA/ENG; B: ENG/ITA; C: FRA/ENG; D: ESP/ENG; F: GER/ENG; O: RUS/ENG; Q:TUR/ENG Keyboard included.

### **EWCM 9900 EO**

### **DIN** controllers for compressor racks



















	Coc
60	EM8
	EMK
	COA

Codes	Description	Details	
EM83CI3*0GH00	EWCM 9900 EO	18 DIN	
EMK0000B0G000 spare keyboard ENG/ITA			
CO000029	3m cable keyboard-base		
CCA0BUI02N000	USB Copy Card		

\*The letter in this position indicates the languages available for the code: in ITA/ENG; B: ENG/ITA; C: FRA/ENG; D: ESP/ENG; F: GER/ENG; O: RUS/ENG Keyboard included.

#### **Applications**

 $The new series of controllers EWCM EO \ (Environmentally Optimised) for compressor racks provides a single solution to temperature control in refrigeration systems.\\$ The external keyboard with graphic LCD and the rapid parameter setting menu give greater accessibility and make it easier for the operator to configure parameters and access data. Energy saving is guaranteed thanks to the dedicated control algorithms.


- Sub-critical  ${\rm CO_2}$  management, glycol, R290 and R427 rooms
- Rooms managed in cascade by plug&play V910 module
- Advanced management of rooms with inverter
- Rapid configuration tool for PC DeviceManager

Updates for glossaries, applications, and the always updated list of compatible refrigerants are available in the reserved area of www.eliwell.com.

#### **Common features**

Insulation Class	2	Connector for base-keyboard	d
Operating temperature	-555°C	connection	rapid 6-way connector
Storage Temperature	-3085°C	Compatible refrigerants	R22, R134a, R502, R404A, R407C, R507,
Ambient humidity of	1090% RH (non-condensing)		R717 (Ammonia), R410A, R417a, R744
use and storage			(CO2), R407A, 407F, R290 (Propane), R427,
			R600A (Isobutane), R23

Technical data	EWCM 9900
Container	PC+ABS UL94 plastic resin casing
	V-0 18 DIN modules (315x110x60mm)
Mounting:	on DIN Omega bar support
Analogue inputs:	4 NTC/NTC extended/PTC/DI + 2 high precision current/voltage (420mA / 05V / 010V)
	+ 1 current/voltage (420mA / 05V / 010V)
Digital inputs	14 voltage (100240V~) +
	6 configurable voltage-free.
Analogue outputs:	3 voltage/current (010V/420mA)
Digital outputs:	17 SPST 5(2)A 250V~ +
	2 SPDT 8(3)A 250V~
Connections:	TTL port for connection to CopyCard USB
	<ul> <li>RS-485 for connection to Televis System and systems based on the ModBus protocol</li> </ul>
	• RS-485 EXP for connection to pulse/stepper (V800/V910) driver
Display:	LCD on external keyboard
Functions:	inverter control both in suction and discharge
Clock:	present
Power consumption:	20W
Power supply:	100240V~ ±10% 50/60Hz

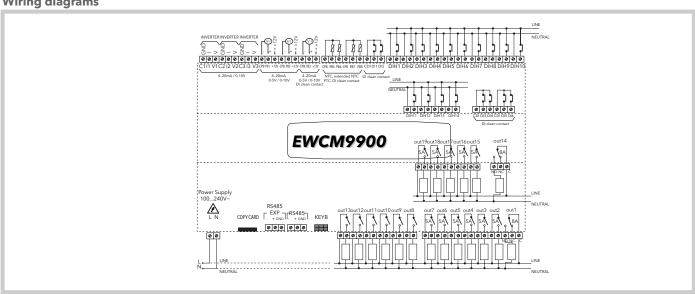

## **FASEC 33 - FASEC 43 (C) - FASEC 53**

**Speed controllers for single-phase fans** 







Codes	Description	Power supply	Function
FA53370000	FASEC 33	220V~	condensation
FA54370000	FASEC 43	220V~	evaporation
FA55370000	FASEC 53	220V~	manual

<sup>\*</sup> probe not included

#### **Applications**


The FASEC 33 and FASEC 43 (C) instruments are designed for speed control and are particularly suited for application onto refrigeration units for the condensation function.

The FASEC 53 is a manual fan regulator suitable for application onto refrigeration units.

#### **Common features**

Front panel protection rating	IP20	Installation	panel-mounted, with 45x92mm hole
Container	plastic body in flame-retardant NORYL	Operating temperature	-560°C
Dimensions	front panel 48x96mm, depth 96mm	Storage temperature	-3075°C
	excluding baseboard		

Technical data	FASEC 33	FASEC 43 (C)	FASEC 53
Connections:	Octal baseboard	Octal baseboard	Octal baseboard
Regulation:	-	-	from 0 to 100% with knob on front panel
Analogue inputs:	1 PTC	1 PTC	-
Setting output:	1 2.5A triac, 7A triac	1 2.5A triac, 7A triac	1 2.5A triac, 7A triac
Setting range:	060 °C	• FASEC 43: -4030 °C • FASEC 43C: 060 °C	
External filter (for version 7A):	load power supply max current 7A; cylinder diameter 38mm, height 28mm; M8 fixing bolt	load power supply max current 7A; cylinder diameter 38mm, height 28mm; M8 fixing bolt	load power supply max current 7A; cylinder diameter 38mm, height 28mm; M8 fixing bolt
Type of setting:	proportional to phase capacity step	proportional to phase capacity step	manual phase capacity step
Type of function:	for condensation	for evaporation	manual
Power supply:	220V~ ±10% 50/60Hz	220V~ ±10% 50/60Hz	220V~ ±10% 50/60Hz

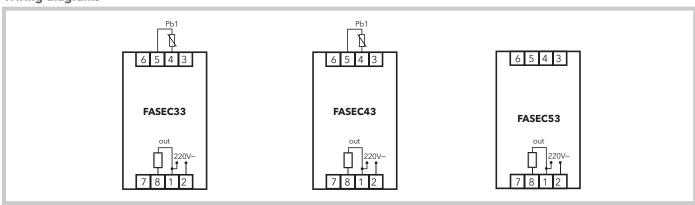

### **FASEC 100 - FASEC 105 - FASEC 155**









Codes	Description	Power supply	Function
FA100780	FASEC 100	220V~	condensation./evaporation
FA105780	FASEC 105	220V~	condensation./evaporation
FA155700	FASEC 155	220V~	manual

<sup>\*</sup> probe not included


#### **Applications**

FASEC 100 units are automatic fan regulators suitable for application onto refrigeration units for both evaporation and condensation.

#### **Common features**

Installation	panel-mounted or on panel back (FASEC 100), wall-	Operating temperature	-560°C
	mounted (FASEC 105, 155)	Storage temperature	-3075°C

Technical data	FASEC 100	FASEC 105	FASEC 155
Casing:	open board version	IP55 plastic container	IP55 plastic container
Connections:	on screw-on terminal block	on screw-on terminal block	on screw-on terminal block
Analogue inputs:	1 PTC	1 PTC	1 PTC
Setting output:	proportional on filtered triac with	proportional on filtered triac	proportional on filtered triac
	anti-interference unit	with anti-interference unit	with anti-interference unit
Switching point:	settable with trimmer in range 355°C	settable with trimmer in range 355°C	settable with trimmer in range 355°C
Type of setting:	phase capacity step	phase capacity step	phase capacity step
Type of function:	for condensation and evaporation	for condensation and evaporation	manual
Power supply:	220V~ ±10% 50Hz	220V~ ±10% 50Hz	220V~ ±10% 50Hz
Pilotable power:	5A	7A	7A
Type of control:	automatic	automatic	automatic

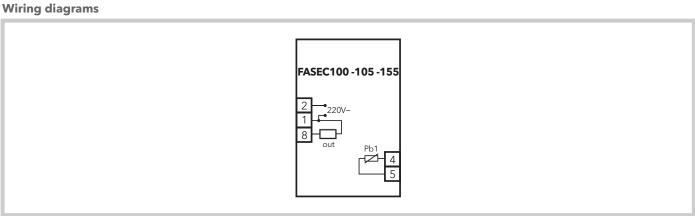

### **FASEC 500 - FASEC 505 - FASEC 555**

**Speed controllers for single-phase fans** 







Codes	Description	Power supply
FA500780	FASEC 500	220V~
FA505780	FASEC 505	220V~
FA555700	FASEC 555	220V~

<sup>\*</sup> probe not included


#### **Applications**

FASEC 500 units are automatic fan regulators suitable for application onto refrigeration units for both evaporation and condensation.

#### **Common features**

Installation	panel-mounted or on panel back (FASEC 500),	Operating temperature	-560°C
	wall-mounted (FASEC 505, 555)	Storage temperature	-3075°C

Technical data	FASEC 500	FASEC 505	FASEC 555
Casing:	open board version	IP55 plastic container	IP55 plastic container
Connections:	on screw-on terminal block	on screw-on terminal block	on screw-on terminal block
Analogue inputs:	1 PTC	1 PTC	1 PTC
Setting output:	proportional on filtered triac	proportional on filtered triac	proportional on filtered triac
	with anti-interference unit	with anti-interference unit	with anti-interference unit
Switching point:	settable with trimmer in range 355°C	settable with trimmer in range 355°C	settable with trimmer in range 355°C
Type of setting:	phase capacity step	phase capacity step	phase capacity step
Type of function:	for condensation and evaporation	for condensation and evaporation	manual
Power supply:	220V~ ±10% 50Hz	220V~ ±10% 50Hz	220V~ ±10% 50Hz
Pilotable power:	23A	23A	23A
Type of control:	automatic	automatic	automatic

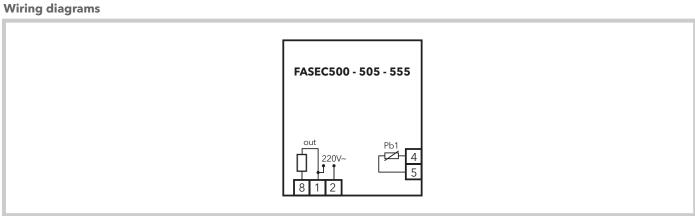

### Speed controllers for single-phase wall fans





Codes	Description	Probe	Power supply
VM253710	WM 253 Manual	-	230V~


#### **Applications**

The WM 253 units are automatic fan regulators suitable for air conditioning systems.

#### **Common features**

Front panel protection rating	IP50	Operating temperature	-555°C
Container	Flame retardant ABS plastic with snap	Storage temperature	-3075°C
	closure	Ambient operation and	
Dimensions	front panel 75x108mm, depth 49mm	storage humidity	1090% RH (non-condensing)
Installation	wall-mounted, fixing screws provided		

Technical data	WM 253
Connections:	on screw-on terminal block for max 2.5mm wires
Setting:	from 0 to 100% with knob on front panel
Input:	not available
Setting output:	2.5A triac
Type of function:	manual control; speed proportional to position of potentiometer on front panel
Type of setting:	proportional to phase capacity step
Power consumption:	3VA max
Power supply:	230V~ ±10% 50Hz

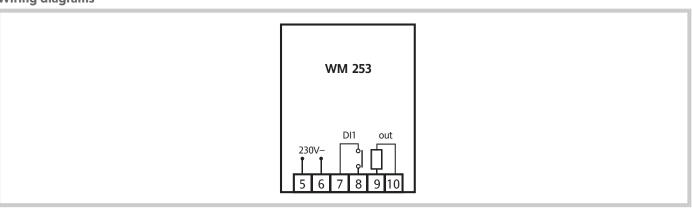

### **DRM300 - RGM300**

### Speed controllers for three-phase fans



Codes	Description	Details
ND3124000CS01	DRM300 12A SCR 0-10V 400V IP55	Slave
ND3204000CS01	DRM300 20A SCR 0-10V 400V IP55	Slave
ND3284000CS01	DRM300 28A SCR 0-10V 400V IP55	Slave
AR312400UPPS1	RGM300 12A SCR NTC 400V IP55	Master/Slave
AR360400UPPS1	RGM300 60A SCR NTC 400V IP55	Master/Slave

#### **Applications**

Regulators in the DRM300 range are three-phase multi-function power units, managed by a cutting-edge extended range micro processor (-40/85 °C) to control three-phase Vac voltage through an SCR phase capacity step system.

Regulators in the RGM300 range are three-phase multi-function power units, managed by a cutting-edge extended range micro processor (-40/85 °C) to control three-phase Vac voltage through an SCR phase capacity step system.

DRM300 and RGM300 units are used in Air Conditioning, Refrigeration, Heating, Ventilation, De-stratification, Thermo-ventilation, Suction and Air Treatment plants in general.


#### **Common features**

Flexible and can be used straight away	Signals in mA - V <del></del> - PWM
Includes Quick Start mode, with all regulation parameters preset	The software supervises regulator and fan operations

DD1/000/404 004	DC11000 404 404
DRM300 12A - 20A - 28A	RGM300 12A - 60A
<b>12A Models:</b> 201x285x130mm (BxAxC)	<b>12A Models:</b> 201x285x130mm (BxAxC)
<b>20A Models:</b> 235x350x181mm (BxAxC)	<b>60A Models:</b> 315x460x228mm (BxAxC)
<b>28A Models:</b> 235x350x204mm (BxAxC)	
400V~ extended range (min 340V - max 480V)	400V~ -15% / +20%
-15% / +20% three-phase	
50/60Hz with recognition and automatic selection	50/60Hz with automatic selection
of network frequency	
12A - 20A - 28A based on model	12A - 60A based on model
5VA	10VA
12A Models: 48W	12A Models: 72W
20A Models: 80W	60A Models: 360W
<b>28A Models:</b> 112W	
010V <del></del>	010V <del></del>
420mA	05V <del></del>
PWM	420mA
	020mA
-20+50°C*	-20+50°C**
-30+85°C	-30+85°C
RH < 85% (non condensing)	RH < 85% (non condensing)
	20A Models: 235x350x181mm (BxAxC) 28A Models: 235x350x204mm (BxAxC) 400V~ extended range (min 340V - max 480V) -15% / +20% three-phase 50/60Hz with recognition and automatic selection of network frequency 12A - 20A - 28A based on model 5VA 12A Models: 48W 20A Models: 80W 28A Models: 112W 010V= 420mA PWM -20+50°C* -30+85°C

<sup>\*</sup>for temperatures < -10°C use **Start/Stop** \*\*for temperatures < -10°C use **S2** 

#### **Dimensions**

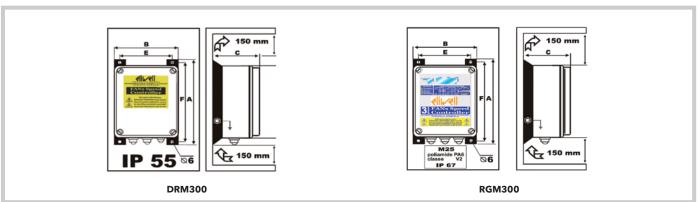

### CFS02- CFS04 - CFS06 - CFS08

#### Power modules to control fan speed



Codes	Description
CF10x11011000	CFS0 <b>x</b>
CF10x21011000	CFS0x /V
CF10x31011000	CFS0x /I

**x**=2,4,6,8

#### **Applications**


The instruments in the new CFS range are optional modules which can be connected to the main control systems for regulation of single-phase fan speed at currents between 2 A and 9 A. The power supply is 230V  $\!\sim\!$  max.

#### **Features**

CFS regulators come in an "open board" format and are available in various models (see table).

Models differ in relation to the rated load current applicable and the type of control signal whether current, voltage or PWM (pulse modulation).

Technical data	CFS 02-04-06-08	CFS 02-04-06-08/V	CFS 02-04-06-08/I
Dimensions:	CFS02:	CFS02/V:	CFS02/I:
	90.0x83.0x38.0mm(LxDxH)+1.6mm(PCB)	90.0x83.0x38.0mm(LxDxH)+1.6mm(PCB)	90.0x83.0x38.0mm(LxDxH)+1.6mm(PCB)
	CFS 04:	CFS04/V:	CFS04/I:
	90.0x83.0x51.0mm(LxDxH)+1.6mm(PCB)	90.0x83.0x51.0mm(LxDxH)+1.6mm(PCB)	90.0x83.0x51.0mm(LxDxH)+1.6mm(PCB)
	CFS06:	CFS06/V:	CFS06/I:
	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)
	CFS08:	CFS08/V:	CFS08/I:
	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)	90.0x83.0x63.5mm(LxDxH)+1.6mm(PCB)
Power supply	230V~ ±10% 50Hz	230V~ ±10% 50Hz	230V~ ±10% 50Hz
Rated current at 40°C:	2.5A - CFS 02 model	2.5A - CFS 02/V model	2.5A - CFS 02/I model
	5A - CFS 04 model	5A - CFS 04/V model	5A - CFS 04/I model
	7A - CFS 06 model	7A - CFS 06/V model	7A - CFS 06/I model
	9A - CFS 08 model	9A - CFS 08/V model	9A - CFS 08/I model
Rated current at 50°C:	2A - CFS 02 model	2A - CFS 02/V model	2A - CFS 02/I model
	4A - CFS 04 model	4A - CFS 04/V model	4A - CFS 04/I model
	6A - CFS 06 model	6A - CFS 06/V model	6A - CFS 06/I model
	8A - CFS 08 model	8A - CFS 08/V model	8A - CFS 08/I model
Type of control signal:	PWM	010V <del></del>	420mA
Ambient operating temperature:	-10+50°C	-10+50°C	-10+50 °C
Ambient storage temperature:	-20+85°C	-20+85°C	-20+85 °C
Use environment humidity and in storage:	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)

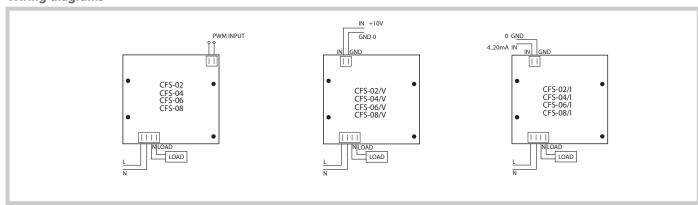

### **SOLUTIONS FOR SUPERMARKETS**



## RTX600/V - RTD600/V - KDEPlus - ECPlus

**DIN controllers for remote EEV systems** 















Codes	Description
EWKRTX000000	KIT RTX600/V + KDEPlus
RTXNVBM0S3H00	RTX600/V
RTDNVBM4S3H00	RTD600/V
KDE400E004000	KDEPlus
EH000050V4000	ECPlus

### **Applications**


 $\textbf{RTX600/V} \ \text{and} \ \textbf{RTD600/V} \ (\text{Environmentally Optimised}) \ \text{are electronic devices used to control remote cabinets, with electronic expansion valve, used singly or a superior of the electronic expansion expansion of the electronic expansion expansion expansion expansion expansion expansion expan$ together in islands or can be remote. Controller flexibility enables fast selection of applications for horizontal, vertical, combined, open and closed counters and includes specific cold room control functions.

The RTX600/V and RTD600/V controllers can be interfaced with a KDEPlus keyboard and the ECPlus display module.

#### **Specifications**

Single model for <b>EEV pulse</b> valves AC and DC powered	Control of heating elements of frames / anti-mist resistances
Eight configurations pre-loaded	Rapid synchronisation of remote and island cabinets with <b>Link</b> <sup>2</sup> plug-n-play
Intelligent defrosting (with clock) to <b>save energy</b> and preserve food better	Compatible with NTC, Pt1000, PTC probes

Technical data	RTX600/V - RTD600/V	KDEPlus	<b>ECPlus</b>
Casing:	PC+ABS resin casing, UL94 V-0	PC+ABS UL94 V-0 resin casing,	Body and window in polycarbonate
	RTX600/V: with box	polycarbonate window, thermoplastic	
	RTD600/V: without box	resin keys	
Dimensions:	10 DIN modules	front panel 74x32 mm, depth 30 mm	front panel 48x28.6 mm - depth 15 mm
Mounting:	on DIN Omega bar support	panel-mounting, with 71x29mm	panel mounting with 45.9x26.4 mm
		(+0.2/-0.1 mm) drilling template	(+0.2/-0.1 mm) drilling template
Display:	-	with decimal point ° 3 digits + sign	with decimal point ° 3 digits + sign
Display range:	• NTC: -50.0°C+110°C;	see power board	see power board
	• PTC: -55.0°C+150°C;		
	• Pt1000: -60°C+150°C		
Analogue/digital inputs:	5 NTC/PTC/Pt1000/D.I.*	-	-
	1 420mA/D.I.*		
	1 ratiometric/D.I.* + 1 D.I. voltage free		
Connections:	1 voltage serial for keypad	• screw terminals for connection to	• JST for connection to KDEPlus user
	1 voltage serial for LAN	power board	terminal
	• 1 RS-485 for connection to Televis <b>System</b>	• JST for connection to ECPlus display	
	or ModBus monitoring system		
	• 1 TTL port for connection to Unicard		
	and DeviceManager (via DMI)		
Digital outputs:	2 SPST 16(8)A max 250V~	-	-
	2 SPDT 16(8)A + 8(4)A max 250V~		
	1 SPST 8(4)A max 250V~		
	1 O.C. multifunction: 12V= 20mA		
	1 SSR 100240V~/ <del>;</del> Imax=300mA		
Analogue outputs:	1 D.A.C. multifunction: 010V/420mA	-	-
Accuracy:	better by 1.0%	-	-
Resolution:	1 or 0.1°C	-	-
Power supply:	SMPS 100240V~ ±10% 50/60 Hz	from power board	from power board
Power consumption:	7.5W max	-	-
Ambient operating temperature:	-5+55°C	-5+55°C	-5+55°C
Ambient storage temperature:	-30+85°C	-30+85°C	-30+85 °C
Ambient operation and storage humidity:	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)

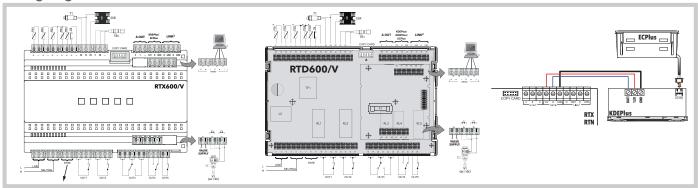

## RTX600 - KDEPlus - KDWPlus - ECPlus

**DIN** controllers for cabinets and cold rooms





















Codes		Description
RTX5HBM0S2H00	(A)	RTX600
KDE400E004000	(C)	KDEPlus
KDW6004004080	(D)	KDWPlus
EH000050V4000	(B)	ECPlus

### **Applications**


**RTX600** (Environmentally Optimised, optimised for the environment) is an electronic device specifically designed for plug-in applications, with thermostatic valve. The RTX600 controller can be interfaced with the KDEPlus, KDWPlus keyboards and the ECPlus display module.

### **Features**

Relay of up to <b>2HP</b> for direct control of loads.	Control of heating elements of frames / anti-mist resistances
Removable terminals and customised quick connections	Rapid synchronisation of remote and island cabinets with <b>Link<sup>2</sup></b> plug-n-play
Intelligent defrosting (with clock) to <b>save energy</b> and preserve food better	Compatible with NTC, Pt1000, PTC probes

Technical data	RTX600	KDEPlus	KDWPlus	<b>ECPlus</b>
Casing:	PC+ABS resin casing,	PC+ABS UL94 V-0 resin	PC+ABS UL94 V-0 resin	Body and window in
	UL94 V-0	casing, polycarbonate window,	casing, polycarbonate window,	polycarbonate
		thermoplastic resin keys	thermoplastic resin keys	
Dimensions:	10 DIN modules	front panel 74x32 mm, depth 30 mm	front panel 180x37 mm, depth 23mm	front panel 48x28.6 mm, depth 15mm
Mounting:	on DIN Omega bar support	panel-mounting, with 71x29mm	panel mounting with 150x31mm	panel mounting with 45.9x26.4 mm
		(+0.2/-0.1 mm) drilling template	(+0.2/-0.1mm) drilling template	(+0.2/-0.1 mm) drilling template
Display:	-	with decimal point ° 3 digits + sign	with decimal point ° 3 digits + sign	with decimal point ° 3 digits + sign
Display range:	• NTC: -50.0°C+110°C;	see power board	see power board	see power board
	• PTC: -55.0°C+150°C;			
	• Pt1000: -60°C+150°C			
Analogue/digital inputs:	5 NTC/PTC/Pt1000/D.I.*	-	-	-
	3 D.I.* voltage-free			
Connections:	• 1 voltage serial for keypad	<ul> <li>screw terminals for</li> </ul>	• screw terminals for	• JST for connection to
	• 1 voltage serial for LAN	connection to power board	connection to power board	KDWPlus user terminal or
	• 1 RS-485 for connection to	• JST for connection to	• JST for connection to	KDEPlus
	Televis <b>System</b> or Modbus	ECPlus display	ECPlus display	
	• 1 TTL for connection to Unicard/			
	DeviceManager (via DMI)			
Digital outputs:	1 SPST 2HP max 240V~	-	-	-
	1 SPST + 1 SPDT 1HP max 250V~			
	1 SPDT 8(4)A max 250V~			
	2 SPST 8(4)A max 250V~			
	1 O.C. 12V <del></del> 20mA			
Analogue outputs:	1 D.A.C. 010V/420mA	-	-	-
Accuracy:	better by 1.0%	-	-	-
Resolution:	1 or 0.1°C	-	-	-
Power supply:	SMPS 100240V~ ±10% 50/60 Hz	from power board	from power board	from power board
Power consumption:	7.5W max	-	-	-
Ambient operating temperature:	-5+55°C	-5+55°C	-5+55°C	-5+55°C
Ambient storage temperature:	-30+85°C	-30+85°C	-30+85°C	-30+85°C
Ambient operation and storage humidity:	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)

<sup>\*</sup> selectable by parameter ° selectable by parameter (from power board)

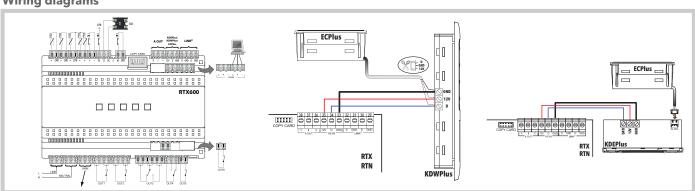

## **EEV Pulse SYSTEM**

### **EEV** system for retrofit

















Codes	Description	Details
EVD2A43BSC000	V800/P1	see model table
EVD2A53BSC000	V800/P3	see model table
ID34DR4SCDH00	ID985 /V	see model table
WK1400100N000	IWK /V	see model table
EVK2A43BXC010	Standard kit	see kit table
EVK2A43BXC020	Starter kit	see kit table
DMI100x002000	Device Manage Interface	see accessories table

### **Applications**


The Electronic Expansion Valve (EEV) is designed to maximise the energy saving and performance potential of refrigerated cabinets in retail applications. The complete Eliwell solution consists of the EEV V800 driver, which can be connected to the IWK/V remote display device, and the ID 985/V electronic controller.

### **Features**

Container	PC+ABS UL94 V-0 plastic resin casing	Ambient operation and	
Operating temperature	-555°C	storage humidity	1090% RH (non-condensing)
Storage temperature	-2085°C		

Technical data	V 800	ID 985/V	IWK/V
Dimensions:	front panel 70.2x87mm, depth 61.6mm	front panel 74x32mm, depth 60mm	front panel 74x32mm, depth 30mm
Mounting:	on DIN Omega bar support	panel mounting with 71x29mm drilling template	panel mounting with 71x29mm drilling template
Display:	-	no decimal point * 3 and a half digits + sign	no decimal point * 4 and a half digits + sign
Display range:	-	-55140°C	-55140°C
Analogue inputs:	1 NTC/4-20mA/0-5V* 1 NTC/4-20mA*	3 NTC/PTC*	-
Digital inputs:	2 voltage free	2 voltage free	-
Connections:	•TTL port for connection to CopyCard and Televis <b>System</b> • TTL port for connection to USB Copy Card and IWK/V		• TTL port for connection to V800
	<ul> <li>LAN port for connection to ID 985/V</li> <li>RS-485 serial port: Models/P1/P3</li> </ul>	<ul> <li>LAN port for connection to V800</li> <li>RS-485 serial port</li> </ul>	-
Digital outputs:	1 SPDT N.O. 5A 250V~, N.C. 2A 250V~ 1 open collector max current 35mA	1 SPDT 5(2)A 1/4 HP 250V~ 3 SPST 3A 250V~	-
Analogue outputs:	1 010V max current 20mA	-	-
Accuracy:	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit	better than 0.5% of end of scale +1 digit
Resolution:	1 or 0.1°C	1 or 0.1°C	1 or 0.1°C
Power supply:	100240V~ ±10% 50/60Hz	100240V~ ±10% 50/60Hz	from V800
Power consumption:	3W max	2.5W max	<1W
User interface:	10-way DipSwitch	LED display	LED display

<sup>\* (</sup>selectable by parameter)

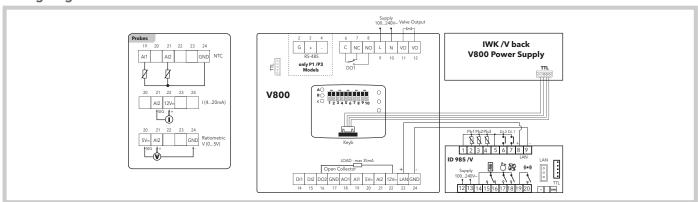

## **EEV Pulse SYSTEM**

### **EEV** system for retrofit

















Codes	Description	Details
EVD2A43BSC000	V800/P1	see model table
EVD2A53BSC000	V800/P3	see model table
ID34DR4SCDH00	ID985 /V	see model table
WK1400100N000	IWK /V	see model table
EVK2A43BXC010	Standard kit	see kit table
EVK2A43BXC020	Starter kit	see kit table
DMI100x002000	Device Manage Interface	see accessories table

### **Applications**

The Electronic Expansion Valve (EEV) is designed to maximise the energy saving and performance potential of refrigerated cabinets in retail applications. The complete Eliwell solution consists of the EEV V800 driver, which can be connected to the IWK/V remote display device, and the ID 985/V electronic controller.

### Model

Code	Description	Details
EVD2A43BSC000	V800/P1	230V~ valve control. on-board RS485
EVD2A53BSC000	V800/P3	230V = valve control. on-board RS485
ID34DR4SCDH00	ID 985 /V	Electronic controller with V800 driver control via LAN serial port
WK1400100N000	IWK /V	Remote terminal for parameter config., displ. I/O, alarms,
		etc.

#### Kit

IXIC		
Code	Description	Details
EVK2A43BXC010	Standard Kit	Includes:
		• 1 x ID 985 /V
		• 1 x V800/P2
		• 1 x 'FAST' NTC probe (\$N8P0X3002):
		• 1 x ratiometric probe (TD420030)
EVK2A43BXC020	Starter Kit	Includes:
		• 1 x ID 985 /V
		• 1 x V800/P2
		• 1 x 'FAST' NTC probe (SN8P0X3002):
		• 1 x ratiometric probe (TD420030)
		• 1 x USB Copy Card (CCA0BUI02N000)
		• 1 x Device Manager CD (DMP1000002000)
		• 1 x Device Manager Interface - DMI

### **Accessories**

Code	Description	Details
DMI100x002000	Device Manager Interface	Hardware interface
		x=1: End User
		x=2: Service
		x=3: Manufacturer

### **Refrigerant compatibility**

R404A - R22 - R410A - R134A - R744 (CO<sub>2</sub>) - R507A - R717 (NH<sub>3</sub>)

### **PULSE\*** valve compatibility

Model	Brand
PXV	Eliwell manufactured by Castel
AKV10	Danfoss
AKV15	Danfoss
AKV20	Danfoss
AKVA (NH <sub>3</sub> )	Danfoss
EX2	Alco
HP130	Parker
DS1120	Parker

<sup>\*</sup>if using other valves, contact Eliwell Technical Support

### **PXV**

### **Electronic pulse expansion valve**



### **Applications**


The PXV solenoid operated expansion valve controls the flow of refrigerant to the evaporator by modulating the opening time of the valve element, allowing a wide range of power variation. Highly precise and reliable control of refrigerant flow increases the efficiency of the entire system. Nine interchangeable orifices are available, with power rating from 1 kW to 24 kW. This valve must be piloted by a V800 electronic driver. The typical application is in refrigeration systems, especially refrigerated counter displays of the kind used in supermarkets.

Technical data	PXV
Voltage tolerance (V~):	+6/-10%
IEC Enclosure rating:	IP65; IP68
Operating principle:	Pulse Width Modulation
Maximum operating time:	6 seconds
Minimum operating time:	1 second
Capacity (R404A):	15 kW
Adjustment range (capacity range):	10100%
Braze welded connections:	3/8" - 1 / 2", 10mm - 12mm, 1 / 2" - 5/8", 12mm - 16mm
TS temperature:	- 40°C - 100°C
Ambient temperature:	- 40°C - 50°C
Leakage from valve seat:	<1cc/min
	<0.003 of kv value
Minimum open pressure differential minOPD:	0 bar
Maximum open pressure differential MOPD:	18 bar
Maximum operating pressure:	45 bar
Burst Pressure:	330/250 bar
Certifications:	97/23/EC
PED:	Category II art.3.3

### Coils

						Power co	nsumption	Class	Maxi			
Type of	Eliwell part	Voltage	Tolerance voltages	Frequency		Start	Operation	of	Tempe		Electrical	Level of
Coil	number	(V~)	(%)	(Hz)	(W)	(50Hz)	(50Hz)	insulation -	Convolutions (°C)	Environment (°C)	connections	protection
PXV	PXVB0ARA20000	24	+10 / -10	50/60	8	1490	700	F	110	50	connector	standard IP65
PXV	PXVB0ARA60000	220 / 230	+6 / -10	50/60	8	162	76	F	110	50	DIN 43650 code	(for IP68 contact the
PXV CO <sub>2</sub>	PXVE0ARA60000	220 / 230	+6 / -10	50/60	22	190	110	F	110	50	PXVB0AR020000	commercial office)

### **Dimensions**

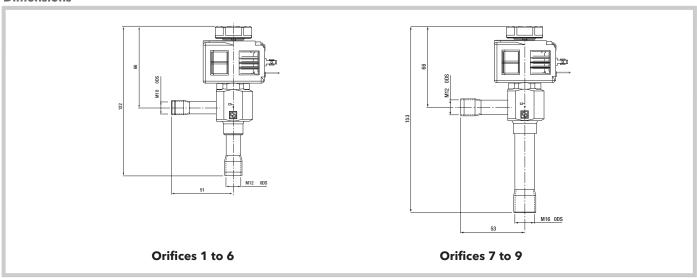

### **PXV**

### **Electronic pulse expansion valve**













### General specifications and cooling capacities of valves (common refrigerants)

			ODS connections					Cooling capacity (kW)				
Code	Type of	Orifice hole	(inc	(inches)		(mm)		Refrigerant				
Couc	orifice	(mm)	IN	OUT	IN	OUT	Kv (m3/h)	R22	R134a	R404A - R507	R407C	R410A
PXVB03S010000	1	0.5	3/8"	1/2"	-	-	0.010	1.0	0.9	0.8	1.1	1.3
PXVBM10S01000		0.5	-	-	10	12	0.010	1.0	0.9	0.8	1.1	1.3
PXVB03S020000	- 2	0.7	3/8"	1/2"	-	-	0.017	1.0	1.7	1./	2.0	2.4
PXVBM10S02000		0.7	-	-	10	12	0.017	1.9	1.7	1.6	2.0	2.4
PXVB03S030000	- 3	0.8	3/8"	1/2"	-	-	0.023	2.5	5 2.0	1.9	2.4	3.0
PXVBM10S03000	3	0.6	-	-	10	12	0.023	2.5				
PXVB03S040000	4	1.1	3/8"	1/2"	-	-	0.042	2.0	3.2	2.9	3.8	4.8
PXVBM10S04000		1.1	-	-	10	12	0.043 3.9	3.9				
PXVB03S050000	5	1.2	3/8"	1/2"	-	-	0.065	, ,	6.7 5.6	5.1	6.7	8.4
PXVBM10S05000		1.3	-	-	10	12	0.065	6.7				
PXVB03S060000	- 6	1.7	3/8"	1/2"	-	-	0.113	9.2	0.0	7.0	9.1	11.4
PXVBM10S06000	0	1.7	-	-	10	12	0.113	9.2	7.7	7.0	9.1	11.4
PXVB04S070000	7	2.3	1/2"	5/8"	-	-	0.200	14.7	12.2	11 2	15.3	18.2
PXVBM12S07000	/	2.3	-	-	12	16	0.200	14.7	12.2	11.3	13.3	
PXVB04S080000	8	2.5	1/2"	5/8"	-	-	0.230	17.4	14.7	13.5	17.7	21.6
PXVBM12S08000	O	2.5	-	-	12	16	0.230	17.4	14.7	13.3	17.7	21.0
PXVB04S090000	9	2.7	1/2"	5/8"	-	-	0.250	19.3	16.3	15.0	19.6	24.1
PXVBM12S09000	7	2.7	-	-	12	16	0.230	17.3	10.5	13.0	17.0	۷٦.۱

Rated cooling capacities refer to: Evaporating temp. Tevap =  $+5^{\circ}$ C • Condensing temp. Tcond =  $+32^{\circ}$ C • Temp. of valve input liquid Tliq =  $+28^{\circ}$ C


### **PXV** valves orifice kits

Code	Description	Refrigerants
PXVB0AR630000	N° 1 orifice kit	
PXVB0AR640000	N° 2 orifice kit	
PXVB0AR650000	N° 3 orifice kit	
PXVB0AR660000	N° 4 orifice kit	R22, R134a,
PXVB0AR670000	N° 5 orifice kit	R404A, R407C,
PXVB0AR680000	N° 6 orifice kit	R410A, R507
PXVB0AR690000	N° 7 orifice kit	
PXVB0AR780000	N° 8 orifice kit	
PXVB0AR790000	N° 9 orifice kit	

### **Coils and connectors**

Code	Description	Refrigerants
PXVB0ARA60000	EEV Coil 220/230V~	R290, R22, R134a, R404A, R407C, R410A, R507
PXVB0ARA20000	EEV Coil 24V~	R290, R22, R134a, R404A, R407C, R410A, R507
PXVB0AR020000	IP65 connector for EEV coil	All

### **Dimensions and specifications**

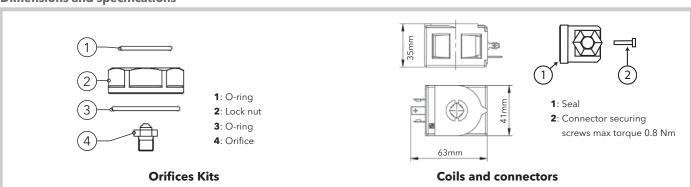

### **Electronic pulse expansion valve**





### General specifications and cooling capacities of CO<sub>2</sub> valves (R744)

			ODS connections				Flow	Cooling capacity (kW)
Code	Type of orifice	Orifice hole (mm)	(inc	(inches)		(mm)		Refrigerant
			IN	ОИТ	IN	OUT	(m3/h)	R744 (CO <sub>2</sub> )
PXVE03S010000	1	0.5	3/8"	1/2"	-	-	0.010	3.10
PXVEM10S01000	'	0.5	-	-	10	12	0.010	3.10
PXVE03S020000	2	0.7	3/8"	1/2"	-	-	0.017	6.20
PXVEM10S02000	2		-	-	10	12	0.017	0.20
PXVE03S030000	3	0.8	3/8"	1/2"	-	-	0.023	8.20
PXVEM10S03000		0.6	-	-	10	12	0.023	6.20
PXVE03S040000	4	1.1	3/8"	1/2"	-	-	0.043	12.40
PXVEM10S04000	4	1.1	-	-	10	12	0.043	12.40
PXVE03S050000	5	1.3	3/8"	1/2"	-	-	0.075	21.70
PXVEM10S05000	5	1.5	-	-	10	12	0.065	21.70
PXVE03S060000	6	1.7	3/8"	1/2"	-	-	0.113	34.10
PXVEM10S06000	0	1.7	-	-	10	12	0.113	34.10
PXVE03S070000	7	2.3	1/2"	5/8"	-	-	0.200	62.00
PXVEM10S07000	/	2.5	-	-	12	16	0.200	02.00

Rated cooling capacities refer to: Evaporating temp. Tevap = -35°C  $\bullet$  Condensing temp. Tcond = 0°C  $\bullet$  Temp. of valve input liquid Tliq = -31°C


### **PXV** valves orifice kits

Code	Description	Refrigerants	
PXVE0AR630000	CO <sub>2</sub> orifice KIT N°.1		
PXVE0AR640000	CO <sub>2</sub> orifice KIT N°.2		
PXVE0AR650000	CO <sub>2</sub> orifice KIT N°.3		
PXVE0AR660000	CO <sub>2</sub> orifice KIT N°.4	R744	
PXVE0AR670000	CO <sub>2</sub> orifice KIT N°.5	10 11	
PXVE0AR680000	CO <sub>2</sub> orifice KIT N°.6		
PXVE0AR690000	CO <sub>2</sub> orifice KIT N°.7		

### **Coils and connectors**

Code	Description	Refrigerants	
PXVE0ARA60000	EEV Coil CO <sub>2</sub> 220/230V~	R744	
PXVB0AR020000	IP65 connector for EEV coil	All	

### **Dimensions and specifications**

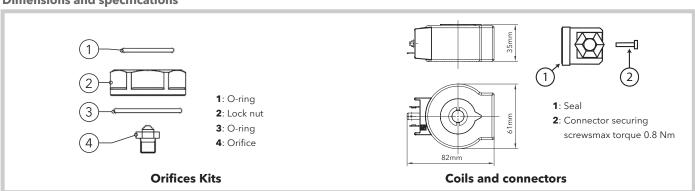

### **PXV**

### **Electronic pulse expansion valve**









### General specifications and cooling capacities of R290, R600, R600a valves

				ODS con	nections_			Cooling capacity (kW)	
Code	Type of orifice	Orifice hole	(inc	:hes)	(m	ım)	Flow factor Kv (m3/h)	Refrigerant	
	Office	(mm)	IN	OUT	IN	OUT	KV (M3/H)	R290, R600, R600a	
PXVV03S010000	1	0.5	3/8"	1/2"	-	-	0.010	0.7	
PXVVM10S01000	'	0.5	-	-	10	12	0.010	0.7	
PXVV03S020000	- 2	0.7	3/8"	1/2"	-	-	0.017	1.4	
PXVVM10S02000		0.7	-	-	10	12	0.017	1.4	
PXVV03S030000	3	0.8	3/8"	1/2"	-	-	0.023	1.9	
PXVVM10S03000	3	0.6	-	-	10	12	0.023	1.7	
PXVV03S040000	4	1.1	3/8"	1/2"	-	-	0.043	2.9	
PXVVM10S04000	4		-	-	10	12	0.043	2.7	
PXVV03S050000	5	1.3	3/8"	1/2"	-	-	0.065	5.0	
PXVVM10S05000	3	1.5	-	-	10	12	0.065	5.0	
PXVV03S060000	6	1.7	3/8"	1/2"	-	-	0.113	7.9	
PXVVM10S06000	0	1.7	-	-	10	12	0.115	7.7	
PXVV04S070000	7	2.3	1/2"	5/8"	-	-	0.200	14.3	
PXVVM12S07000		2.0	-	-	12	16	0.200	1 1.5	
PXVV04S080000	8	2.5	1/2"	5/8"	-	-	0.230	16.4	
PXVVM12S08000	0	2.5	-	-	12	16	0.230	10.4	
PXVV04S090000	9	2.7	1/2"	5/8"	-	-	0.250	17.0	
PXVVM12S09000	9	2.7	-	-	12	16	0.250	17.9	

Rated cooling capacities refer to: Evaporating temp. Tevap = +5°C • Condensing temp. Tcond = +32°C • Temp. of valve input liquid Tliq = +28°C


### **PXV** valves orifice kits

Code	Description	Refrigerants	
PXVV0AR630000	R290 orifice kit N°1		
PXVV0AR640000	R290 orifice kit N°2		
PXVV0AR650000	R290 orifice kit N°3		
PXVV0AR660000	R290 orifice kit N°4		
PXVV0AR670000	R290 orifice kit N°5	R290	
PXVV0AR680000	R290 orifice kit N°6		
PXVV0AR690000	R290 orifice kit N°7		
PXVV0AR780000	R290 orifice kit N°8		
PXVV0AR790000	R290 orifice kit N°9		

### **Coils and connectors**

Code	Description	Refrigerants
PXVB0ARA60000	EEV Coil 220/230V~	R290, R22, R134a, R404A, R407C, R410A, R507
PXVB0ARA20000	EEV Coil 24V~	R290, R22, R134a, R404A, R407C, R410A, R507
PXVB0AR020000	IP65 connector for EEV coil	All

### **Dimensions and specifications**

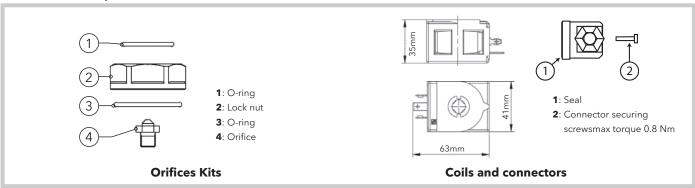

# **EEV Stepper system**

### **EEV** stepper system





Codes	Description
XVD420H485000	XVD 420H RS-485
SKP1000000000	SKP10 Configuration Keyboard
DMI100x002000*	Device Manager Interface (Hardware interface)
TF111205	Transformer 230V~/24V~ 35VA

<sup>\*</sup>x=1: End User; x=2: Service; x=3: Manufacturer

### **Applications**

The driver for the proportional motorised valve XVD is designed to optimize energy efficiency and the refrigerated utilities performance. Its wide compatibility with refrigerants and with the valves on the market, whether unipolar or bipolar, makes this product particularly flexible. In addition, the availability of the service keyboard SKP10 and of the USB interface allows easy and fast set-up of the system.

### **Specifications**

Container	PC+ABS UL94 V-0 plastic resin casing	Ambient operation and	
Operating temperature	-5+55°C	storage humidity	1090% RH (non-condensing)
Storage temperature	-20+85°C		


Technical data	XVD 420H 485	SKP10
Dimensions:	front panel 70.2x87 mm, depth 61.6 mm	front panel 74x32mm, depth 60mm
Mounting:	on DIN Omega bar support	panel mounting (71x29mm drilling template)
Display:		3 and a half digits + sign
Display range:		-55140°C
Analogue inputs:	2x NTC/Pt1000/420mA/0-5V <del></del> /0-10V <del></del> *	-
	2x NTC/Pt1000	-
Digital inputs:	2 voltage free	
Connections:	• TTL (Keyb) for connection to Unicard/MFK/DMI	Lan port for connection to XVD
	• TTL for Televis/Modbus connection	
	• RS485 for connection Televis/Modbus	
Digital outputs:	1 SPST: N.O. 5A 250V~	
	1 Open Collector 12V <del></del> max 100mA	better than 0.5% of end of scale
Accuracy:	better than 0.5% of end of scale	1 or 0.1°C
Resolution:	0.1°C	100240V~ ±10% 50/60Hz
Power supply:	24V~/ <del></del> ±10% 50/60 Hz	<1W
Power consumption:	30VA / 25W	LED display
Interface:	-	

<sup>\* (</sup>selectable by parameter)

### **STEPPER valve compatibility\***

Model	Brand
SXVB 24V Bipolar	Eliwell - manufactured by Castel
ETS50 12V Bipolar, ETS100 12V Bipolar	Danfoss
EX5 24V Bipolar, EX6 24V Bipolar, EX7 24V Bipolar, EX8 24V Bipolar	Alco
E2V, E3V, E4V, E5V, E6V, E7V 12V Bipolar	Carel
SER(I) G, J, K, B, C, D 12V Bipolar	Sporlan
SER 1.5 TO 20 12V Bipolar	Sporlan
SEI-30 12V Bipolar, SEI-50 12V Bipolar	Sporlan
SEH 12V Only bipolar model	Sporlan
DPF(Q)/DPF(T01) 12V Unipolar	Sanhua
EXM246/EXL246 12V Unipolar	Alco

<sup>\*</sup>if using other valves, contact Eliwell Technical Support

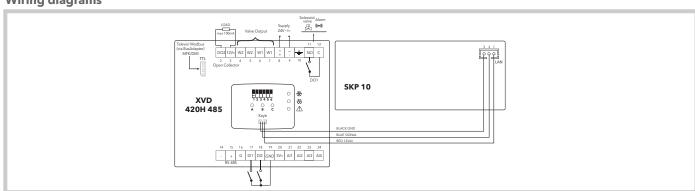

## **SXVB**

### Bipolar 'stepper' expansion valve



### **Applications**


The bipolar expansion valve series SXVB regulates the flow of refrigerant to the evaporator by proportionally modulating its opening and closing, allowing a wide range of power variation.

Highly precise and reliable control of refrigerant flow increases the efficiency of the entire system.

There are two valve bodies and five orifices to meet power ratings ranging from 28kW (R404) to 121 kW (R410).

Technical data	SXVB
Type of actuator:	Bipolar stepper motor with permanent magnet
Type of Control:	Full Step (advised)
Stroke / Steps for complete closing:	8.5mm / 195 Step
Rated power:	from 28.5 kW to 121 kW depending on the refrigerant and flow direction
Rated power operating conditions:	evapoating temperature = +5°C
	condensing temperature = +32°C
	sub-cooling= +4°C
	overheating = +7°C
Adjustment range:	1095%
Refrigerant:	R22, R407c, R404a, R134a, R410A (R744 and hydrocarbons on request)
MOPD:	see cooling capacity table
Maximum operating pressure:	45 bar
TS temperature:	-40 / +105°C
Protection:	IP 67
Driver:	Eliwell XVD, Eliwell V910
Connections and geometry:	braze welded tube, angled
Operation:	Bidirectional
Sight glass:	not available
Certifications:	CE
Possible operating angles	360°
Motor:	removable and replaceable
Step angle:	15°± 15%
Step:	0.042mm
Rated speed:	0-20 mm/s (500 step/s max)
	advisable 0.8 mm/s (20 step/s)
Contact current	100% Duty Cycle
Steps between 10% and 95% of effective stroke	>500 million steps
N° of cycles tested between 10% and 95% of effective stroke	~5 million cycles
Maximum overstroke steps	150.000 cycles of 190 steps each
Rated voltage	24 V
Rated phase current	200 mA
Connector	4-way - M12 4G 3mt (available from 1.5 to 15m, standard 3m)
53	· ····································

### Valve body dimensions

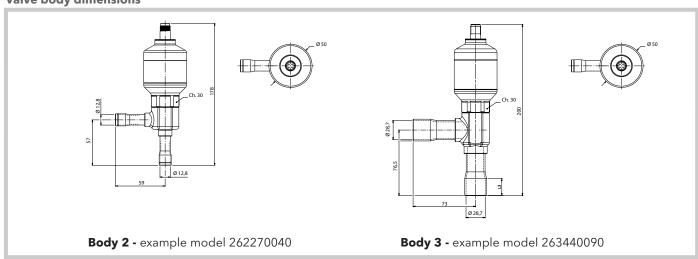

### **SXVB**

### Bipolar 'stepper' expansion valve



### General specifications and cooling capacities of valves

		Orifice hole	e ODS	MOPD	Refrigerant cooling capacity (kW)*				
Code	Body	(mm)	connections	(bar)	Inlet	R410A	R407C	R404A	R134a
CV//D2/2270040				40	side	47.6	41.3	28.5	29.1
SXVB262270040			1/2"	40	under	46	40.6	28.5	28.6
SXVB262270050			5/8"	40	side	47.6	41.3	28.5	29.1
3AVB2022/0030	2	2.7	5/6	40	under	46	40.6	28.5	28.6
SXVB262270070	2	2.7	7/8"	40	side	47.6	41.3	28.5	29.1
3AVB2022/00/0			7/6	40	under	46	40.6	28.5	28.6
SXVB26227M120			12mm	40	side	47.6	41.3	28.5	29.1
3/VDZ0ZZ/IVI1ZU			12111111	40	under	46	40.6	28.5	28.6
SXVB262320040			1/2"	40	side	59	51.2	35.3	36
5AVBZ0Z3Z0U4U			1/2	40	under	54	47.6	32.8	35.6
SXVB262320050			5/8"	40	side	59	51.2	35.3	36
3AVBZ0Z3Z0030	2	3.2		40	under	54	47.6	32.8	35.6
SXVB262320070	4	3.2	7/8"	40	side	59	51.2	35.3	36
3AVB202320070			12mm	40	under	54	47.6	32.8	35.6
SXVB26232M120	1			40	side	59	51.2	35.3	36
3AVD20232IVI120			1211111	40	under	54	47.6	32.8	35.6
SXVB263360070			7/8"	40	side	85.1	73.9	51	52
3XVD203300070	3	3.6	770	40	under	78.1	68	47.5	51.4
SXVB263360090	3	3.0	1 1/8"	40	side	85.1	73.9	51	52
3XVD203300070			1 1/6	40	under	78.1	68	47.5	51.4
SXVB263400070			7/8"	40	side	85.1	73.9	51	52
3/VD203400070	3	4.0	770	30	under	78.1	68	47.5	51.4
SXVB263400090		4.0	1 1/8"	40	side	85.1	73.9	51	52
3/(VDZ03400070			1*	30	under	78.1	68	47.5	51.4
SXVB263440070			7/8"	35	side	121	105	73	74
3/(10/034400/0	3	4.4	770	23	under	111	98	67	73
SXVB263440090		3 4.4	1 1/8"	35	side	121	105	73	74
5AVB263440090				23	under	111	98	67	73


<sup>&</sup>quot;Rated cooling capacities refer to:

Evaporation temp. Tevap =  $+5^{\circ}$ C • Condensation temp. Tcond =  $+32^{\circ}$ C • Sub-cooling  $4^{\circ}$ C • Overheating  $7^{\circ}$ C

### **Cable**

Code	Description
SXVB2624VC300	3m cable

### **Tightening torque - Connector**

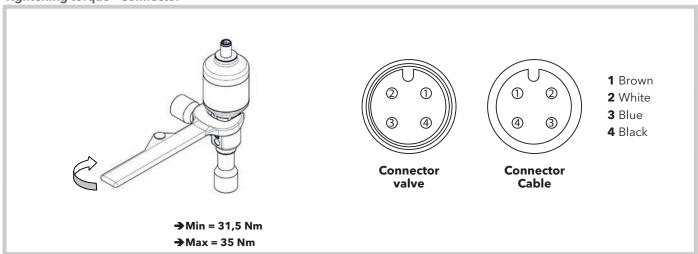

### **EWCM 8900 - 9100 EO**

### **DIN controllers for compressor racks**























Codes	Description	Details	
EM32AG2*0GH00	EWCM 8900 EO	13 DIN	
EM32BH2*0GH00	EWCM 9100 EO	13 DIN	
EMK0000B0G000	spare keyboard ENG/ITA		
CO000029	3m cable keyboard-base		
CCA0BUI02N000	USB Copy Card		

 $<sup>{}^{\</sup>star}$ The letter in this position indicates the languages available for the code:

### **Applications**

 $The new series of controllers EWCM EO \ (Environmentally Optimised) for compressor racks provides a single solution to temperature control in refrigeration systems.\\$ The external keyboard with graphic LCD and the rapid parameter setting menu give greater accessibility and make it easier for the operator to configure parameters and access data. Energy saving is guaranteed thanks to the dedicated control algorithms.


- Sub-critical CO<sub>2</sub> management, glycol, R290 and R427 rooms
- Rooms managed in cascade by plug&play V910 module
- Advanced management of rooms with inverter
- Rapid configuration tool for PC DeviceManager

Updates for glossaries, applications, and the always updated list of compatible refrigerants are available in the reserved area of www.eliwell.com.

#### **Common features**

Insulation Class	2	Connector for base-keyboard	Connector for base-keyboard		
Operating temperature	-555°C	connection	rapid 6-way connector		
Storage Temperature	-3085°C	Compatible refrigerants	R22, R134a, R502, R404A, R407C, R507,		
Ambient humidity of	1090% RH (non-condensing)		R717 (Ammonia), R410A, R417a, R744		
use and storage			(CO2), R407A, 407F, R290 (Propane), R427,		
			R600A (Isobutane), R23		

Technical data	EWCM 8900	EWCM 9100
Container	PC+ABS UL94 plastic resin casing	PC+ABS UL94 plastic resin casing
	V-0 13 DIN modules (227.5x110x60mm)	V-0 13 DIN modules (227.5x110x60mm)
Mounting:	on DIN Omega bar support	on DIN Omega bar support
Analogue inputs:	4 NTC/NTC extended/PTC/D.I.+	4 NTC/NTC extended/PTC/D.I.+
	2 high precision current (420mA / 05V / 010V)	2 high precision current (420mA / 05V / 010V)
Digital inputs	6 voltage (100240V~)	10 voltage (100240V~) +
		4 configurable voltage-free.
Analogue outputs:	2 voltage/current (010V/420mA)	2 voltage/current (010V/420mA)
Digital outputs:	6 SPST 5(2)A 250V~ +	11 SPST 5(2)A 250V~ +
	1 SPDT 8(3)A 250V~	2 SPDT 8(3)A 250V~
Connections:	•TTL port for connection to CopyCard USB	TTL port for connection to CopyCard USB
	• RS-485 for connection to Televis <b>System</b> and systems	• RS-485 for connection to Televis <b>System</b> and systems
	based on the ModBus protocol	based on the ModBus protocol
	• RS-485 EXP for connection to pulse/stepper (V800/V910) driver	• RS-485 EXP for connection to pulse/stepper (V800/V910) driver
Display:	LCD on external keyboard	LCD on external keyboard
Functions:	inverter control both in suction and delivery	inverter control both in suction and delivery
Clock:	present	present
Power consumption:	20W	20W
Power supply:	100240V~ ±10% 50/60Hz	100240V~ ±10% 50/60Hz

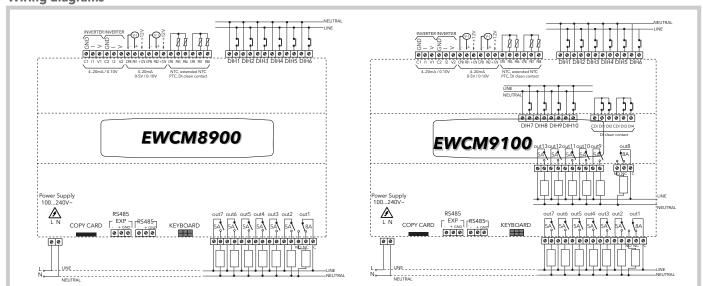

in A: ITA/ENG; B: ENG/ITA; C: FRA/ENG; D: ESP/ENG; F: GER/ENG; O: RUS/ENG; O:TUR/ENG Keyboard included.

### **EWCM 9900 EO**

### **DIN controllers for compressor racks**






















\*The letter in this position indicates the languages available for the code: in A: ITA/ENG; B: ENG/ITA; C: FRA/ENG; D: ESP/ENG; F: GER/ENG; O: RUS/ENG Keyboard included.

### **Applications**

The new series of controllers EWCM EO (Environmentally Optimised) for compressor racks provides a single solution to temperature control in refrigeration systems. The external keyboard with graphic LCD and the rapid parameter setting menu give greater accessibility and make it easier for the operator to configure parameters and access data. Energy saving is guaranteed thanks to the dedicated control algorithms.


- Sub-critical CO<sub>2</sub> management, glycol, R290 and R427 rooms
- Rooms managed in cascade by plug&play V910 module
- Advanced management of rooms with inverter
- Rapid configuration tool for PC DeviceManager

Updates for glossaries, applications, and the always updated list of compatible refrigerants are available in the reserved area of www.eliwell.com.

#### **Common features**

Insulation Class	2	Connector for base-keyboard		
Operating temperature	-555°C	connection	rapid 6-way connector	
Storage Temperature	-3085°C	Compatible refrigerants	R22, R134a, R502, R404A, R407C, R507,	
Ambient humidity of	1090% RH (non-condensing)		R717 (Ammonia), R410A, R417a, R744	
use and storage			(CO2), R407A, 407F, R290 (Propane), R427,	
			R600A (Isobutane), R23	

Technical data	EWCM 9900
Container	PC+ABS UL94 plastic resin casing
	V-0 18 DIN modules (315x110x60mm)
Mounting:	on DIN Omega bar support
Analogue inputs:	4 NTC/NTC extended/PTC/DI + 2 high precision current/voltage (420mA / 05V / 010V)
	+ 1 current/voltage (420mA / 05V / 010V)
Digital inputs	14 voltage (100240V~) +
	6 configurable voltage-free.
Analogue outputs:	3 voltage/current (010V/420mA)
Digital outputs:	17 SPST 5(2)A 250V~ +
	2 SPDT 8(3)A 250V~
Connections:	TTL port for connection to CopyCard USB
	<ul> <li>RS-485 for connection to Televis System and systems based on the ModBus protocol</li> </ul>
	RS-485 EXP for connection to pulse/stepper (V800/V910) driver
Display:	LCD on external keyboard
Functions:	inverter control both in suction and delivery
Clock:	present
Power consumption:	20W
Power supply:	100240V~ ±10% 50/60Hz

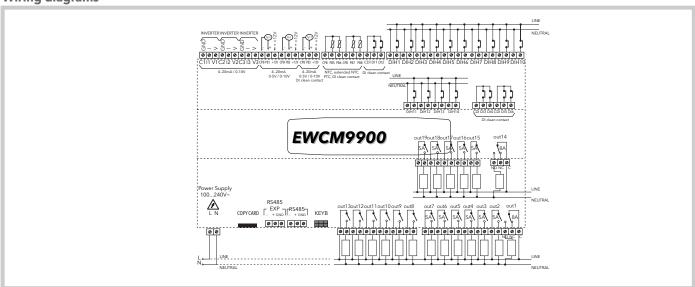

# Subcritical CO<sub>2</sub> cascade system

### Motorised electronic valve control









Codes	Description	Details
EVD4A31BSH100	V910 EEVD step valve 24V~ RS485	EEV driver module with dual PID controller
SKP1000000000	SKP10 - Configuration keyboard	Keyboard for configuration
DMI100x002000*	Device Manager Interface	

\*x=1: End User; x=2: Service; x=3: Manufacturer

### **Applications**

The V910 driver for the control of motorised valves is designed for the optimised control of the heat exchanger in CO2 sub-critical cascade systems. Thanks to its flexibility it also finds application in the control of hot gas bypass systems, compressor delivery temperatures / pressure limitation and liquid sub-cooling.

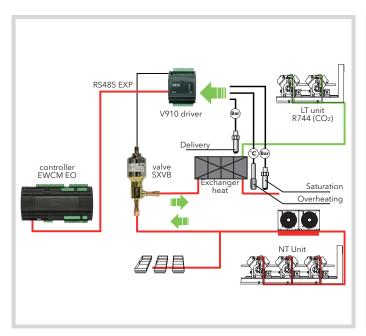




### Solution integrated with EWCM 8/9000 EO

The high-precision PID control of the V910 module is integrated with the EWCM 8/9000 EO series controllers through the serial port dedicated to share real-time configuration and the heat exchanger control status, also through the Televis supervision system.

### Solution for dual heat exchanger

V910 is designed also for operation independent from the central controller, thus providing the option for configurations with multiple heat exchangers in series or parallel to provide better power modulation and greater safety thanks to a redundant configuration.

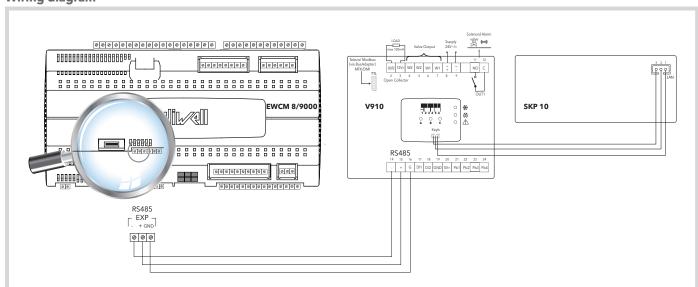

### TelevisGo

#### Monitoring and maintenance systems via web





Codes	Description	Applications
TGOAXE101E00K	KIT Televis <b>Go</b> 10*	up to 10 controllers
TGOAXE301E00K	KIT Televis <b>Go</b> 30*	up to 30 controllers
TGOAXE601E00K	KIT Televis <b>Go</b> 60*	up to 60 controllers
TGOAXE2H1E00K	KIT Televis <b>Go</b> 224*	up to 224 controllers

<sup>\*</sup>contains No.1 **Serial**Adapter + 1.5m serial cable

Codes	Description	Applications
TGOAXE101ER0K	KIT Televis <b>Go</b> 10*	up to 10 controllers
TGOAXE301ER0K	KIT Televis <b>Go</b> 30*	up to 30 controllers
TGOAXE601ER0K	KIT Televis <b>Go</b> 60*	up to 60 controllers

LE versions do not include the Algorithms function

### **Applications**

Televis Go is a family of devices to monitor, control and manage installations from remote.

The product is based on a PC Embedded standard platform to offer greater calculation power, data filing space and, thanks to the Microsoft Embedded operating system, easy system expansion using standard peripherals available on the market.

Televis Go is the monitoring system recommended for systems with 30 or more controllers, up to a maximum of 224.



#### Data recording and alarm management

- Recording temperature / pressure / humidity / digital inputs and outputs / functional statuses
- Recording alarm conditions and signaling by email and SMS



#### **Energy reports**

- Connection to energy meters with MODBUS protocol
- Dashboards dedicated to the real time and historic display of energy consumption
- Graphic display of energy consumption combined with the functional parameters of the system



#### Graphic display of the system

- Display and access to data and parameters of the controllers by means of a freely configurable graphic interface
- HTML interface accessible by most browsers for PC, tablet and smartphone (Internet Explorer, Mozilla, Firefox)
- The graphic interface can be planned off-line with the tools freely available for download from the site www.eliwell.com



#### Web connectivity

- All TelevisGo functions are accessible in remote mode with a web browser
- It is possible to access all the historic and real time information and to interact with each controller connected to the system to change its parameters and activate the functions
- The complete management of Televis**Go** is included (configuration, updating, restarting of the device)
- Televis Go can be connected to the Internet with ADSL, 3G or 4G connections, or by configuring the LAN/WAN network to which the device is connected



### **Activity automation**

- Automation of recurrent activities such as switching the lights on and off for energy saving
- Periodic sending by e-mail of detailed reports in PDF format
- Periodic transfer of data to centralised systems for performance analysis



### Algorithms and Expandability with IEC 61131\*

- System extensions with new plug-n-play algorithms installable from the web interface
- Algorithms for management of floating evaporation, faulty pressure probe backup and distribution of the dewpoint for energy saving functions with RTX600 /V and EWCM 9000 EO
- System for the development of new algorithms for distributed management of the installation based on FREE Studio with standard languages IEC 61131

<sup>\*</sup>contains No.1 Serial Adapter + 1.5m serial cable

<sup>\*</sup>functions not available in LE versions

### TelevisGo

#### Monitoring and maintenance systems via web



### **Specifications**

# For the end user

- recording of HACCP temperatures
- information on energy consumption
- complete, easy to use system
- open, expandable system

#### For the maintenance technician


- compact, reliable, ready-to-use system
- intuitive user interface easy to learn
- alarm signalled by e-mail, SMS and configurable priorities
- distance access via web for diagnostics and control
- dedicated maintenance tools: parameters instruments, controls, detailed diagnostics and recording of all operational status
- system fully updatable via web: software, languages, driver controllers
- instruments for off line configuration and fast modification of settings

#### For chains and system integrators

- solution can be scaled to suit the size of the installation
- instruments for off line configuration, plant cloning and configuration modification in series
- compatibility with third-party Modbus devices: energy measurement and HVAC controls
- XML protocol open:
  - data sent periodically (push function)
- sending on occurrence of data and alarms acquisition of real-time data
- interrogation of historical data and alarm
- execution of commands / modification of controller parameters in remote mode
- SOCKS protocol integrated for routing of TCP and UDP communications

#### **Technical Data** TelevisGo 10 / 30 / 60 / 224 User interface: from web browser • Internet Explorer 7 or later Browsers supported: Mozilla Firefox 3.5 or later • Google Chrome 16.0.x or later IT - EN - FR - DE - ES - PT - PL - NL - RU - CN User language interfaces pre-loaded: Operating System: MS Windows XP Embedded Power supply: 12V<del>...</del> with external power supply 100...240V~ ±10% Power consumption: 10W max 6 USB port Connections: 2 RS-232 ports (for analogue modem or GSM) 2 RS-232 ports (for **Serial**Adapter) 1 Ethernet port (LANRJ45) VGA monitor connection PS2 keyboard connector

### Connectivity

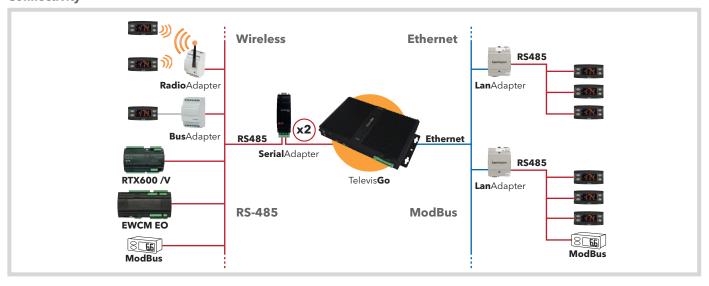

### TelevisIn / TelevisOut

### **Data acquisition modules and actuators**





Codes	Description	Power supply
TAMID152RS700	Televis <b>In</b>	100240V~
TAMOD602RS700	Televis <b>Out</b>	100240V~


### **Applications**


Televis In and Televis Out are data acquisition, alarm signalling and user control modules which can be connected to Televis systems or third-party systems, thanks to  $the \, ModBus \, protocol \, that \, can \, be \, selected \, from \, the \, relevant \, parameter. \, The \, Televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, Televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, enables \, the \, acquisition \, of \, temperature, \, the \, televis \\ \textbf{In} \, controller, \, connected \, to \, specific \, probes, \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connected \, the \, televis \\ \textbf{In} \, controller, \, connec$ humidity and pressure data, and digital signals. It will also calculate dew points. Televis Out provides alarm signalling and utility monitoring functions. It can be used to connect warning devices or telephone diallers and, in combination with the supervisor, to deliver energy savings, managing lights and other utilities.

### **Common features**

Compatible with third-party and ModBus systems	Two models to cover all applications
Up to 8 configurations for fast installation	Removable "T" connector for fast installation of the RS-485 line

Technical data	TelevisIn	TelevisOut
Dimensions	4 DIN modules	4 DIN modules
Mounting:	on DIN Omega bar support	on DIN Omega bar support
Display range:	• NTC probe: -50.0110.0 °C	• NTC probe: -50.0110.0 °C
	• PTC probe: -55.0140.0 °C	• PTC probe: -55.0140.0 °C
	• Pt1000 probe: -55.0400.0 °C	• Pt1000 probe: -55.0400.0 °C
	• Vin probe: 0-1V, 0-5V and 0-10V	• Vin probe: 0-1V, 0-5V and 0-10V
	• Ain probe: 020mA and 420mA	• Ain probe: 020V and 420mA
Analogue inputs:	3 NTC/PTC/Pt1000/DI inputs +1 V (0-1V / 0-5V / 0-10V)	
	input + 1 I (020mA / 420mA) input	
Digital inputs:	2 digital inputs (DI1 / DI2)	2 clean contact digital inputs (DI1 / DI2) also configurable
		as analogue outputs with no dangerous voltage
Digital outputs:	1 SPST 2A 250V~	2 (SELV) Open Collector: PWM
		3 SPST 2A 250V~
		1 SPDT 2A 250V~
Connectivity:	• 1 RS-485 for connection to Televis <b>System</b> monitoring and	• 1 RS-485 for connection to Televis <b>System</b> monitoring and
	systems based on ModBus protocol	systems based on ModBus protocol
	• 1 TTL to connect to Eliwell Unicard USB, Copycard and	• 1 TTL to connect to Eliwell Unicard USB, Copycard and
	DMI interface for <b>Device</b> Manager	DMI interface for <b>Device</b> Manager
Connectors:	Removable screw terminals	Removable screw terminals
Applications:	AP1=Temperature; AP2=Analogue Inputs;	AP1 = Alarm signalling;
	AP3=Digital Inputs; AP4=Dew Point;	AP28=Free
	AP58=Free	
Power consumption:	5W	5W
Power supply:	SMPS 100240V~ ±10% 50/60Hz	SMPS 100240V~ ±10% 50/60Hz





### **LKD**

### **Detection and indication of refrigerant leaks**





Codes	Description	Power supply
LKD41CO2XR400	LKD 110 CO2	12/24V
LKD41xxxxR400	LKD 100	12/24V
LKD66CO2XR400	LKD 210 CO <sub>2</sub>	12/24V
LKD66xxxxR400	LKD 200	12/24V
LKDSG00000000	LKD Splash Guard	-

xxxx = R134 / R404 / NH3X / R290 / R507 / R600 according to the type of compatible refrigerant.

### **Applications**

The state-of-the-art **LKD** series gas sensors can detect a wide range of gases and refrigerants according to the model: R134a, R404a, NH3, R290, R507a, R600a, CO2. The gas sensors of LKD series can be used alone to control a buzzer, siren, etc., or integrated with Eliwell or third party remote management systems, thanks to a RS485 ModBus on board.


The main applications are: LT or NT cold rooms, refrigerated cabinets, compressor racks.

### **Common features**

Compatible with Televis and third-party systems.	Suitable for refrigerants: R134a, R404a, NH3, R290, R507a, R600a, CO2
Available versions <b>SC</b> (semiconductor) and <b>IR</b> (infrared)	

Technical data	LKD 100/110	LKD 200/210
Dimensions	86x142x53mm	175x165x82mm
Enclosure rating	IP41 (NT applications)	IP66 (LT applications)
Mounting	wall-mounted, height suitable to the type of refrigerant	wall-mounted, height suitable to the type of refrigerant
Analogue outputs	0-5 V, 1-5 V, 0-10 V, 2-10 V, 4-20 mA	0-5 V, 1-5 V, 0-10 V, 2-10 V, 4-20 mA
Digital outputs	1 1A - 24V <del></del> /~ relay	1 relé 1A - 24V <del></del> /~
	Settable delay: 0, 1, 5, 10 minutes	Settable delay: 0, 1, 5, 10 minutes
Connectivity	1 RS485 for connection to supervisor	1 RS485 for connection to supervisor
	Modbus (depending on model)	Modbus (depending on model)
Measurement range	<b>SC</b> : 10-1.000ppm - <b>IR</b> : ppm - %	<b>SC</b> : 10-1.000ppm - <b>IR</b> : ppm - %
Temperature range	-20+50°C	-40+50°C
Humidity range	095% (non-condensing)	095% (non-condensing)
Sensor service life	<b>SC</b> : 5-8 years - IR: 8-10 years	<b>SC</b> : 5-8 years - IR: 8-10 years
T50 alarm threshold	<b>SC</b> : 76 sec (filtered) - <b>IR</b> : 25 sec	SC: 76 sec (filtered) - IR: 25 sec
T90 alarm threshold	SC: 215 sec (filtered) - IR: 90 sec	<b>SC</b> : 215 sec (filtered) - <b>IR</b> : 90 sec
Recovery time	<b>SC</b> : 600 sec - <b>IR</b> : 210 sec	<b>SC</b> : 600 sec - <b>IR</b> : 210 sec
On-site alarm	light (red LED) / acoustic (buzzer)	light (red LED) / acoustic (buzzer)
Consumption (at 12 V)	<b>SC</b> : 153mA - <b>IR</b> : 136 mA	<b>SC</b> : 153mA - <b>IR</b> : 136 mA
Power supply	12-24V <del></del> /~ ±20% 50/60Hz	12-24V <del></del> /~ ±20% 50/60Hz

### **Dimensions**

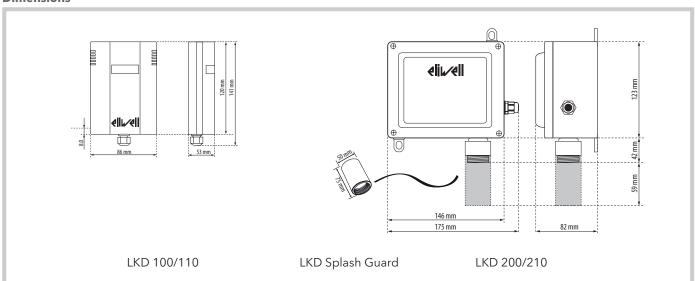

## **Memory 1000**

### Temperature recording and printing



Codes	Description	Temperature input
M1K04N03D1X00	MEMORY 1040 F*	4
M1K04N03D0X00	MEMORY 1045 F	4
M1K08N03D1X00	MEMORY 1080 F*	8
M1K08N03D0X00	MEMORY 1085 F	8
M1K26N03D1X00	MEMORY 1080 F 2AI*	8
M1K26N03D0X00	MEMORY 1085 F 2AI	8
M1K26N03D1X00	MEMORY 1180/15 F 2AI*	8
M1K26N03D0X00	MEMORY 1185/15 F 2AI	8
RC444444	Thermal paper roll	

<sup>\*</sup> models with printer

#### **Applications**

Memory 1000 is available in a wide range of models, combining the capabilities of a monitoring system with the ease-of-use of a data logger in order to meet various customer requirements.

#### **Common features**

Powerful and easy to use thanks to:

• fast data download on SD CARD, without using the PC

• soft key to enter the report printing menu directly

Compatible with RadioAdapter wireless networks

Manages all aspects of network controller alarms

12 months+ data logging capacity


A wide range of models to fit all application requirements

Up to 10 digital and analogue inputs

Technical data	Memory 1000 with printer	Memory 1000 without printer
User interface	Backlit graphic LCD	Backlit graphic LCD
	8 polycarbonate keys	7 polycarbonate keys
Analogue inputs	• max 8 NTC / 4 NTC based on model	• max 8 NTC / 4 NTC based on model
	• max 2 420 mA (only for models 2AI)	• max 2 420 mA (only for models 2AI)
Digital inputs	2 fixed D.I. Max 8 / 4 configurable based on model	2 fixed D.I. Max 8 / 4 configurable based on model
Digital outputs	1 SPDT 5(2)A 250V~	1 SPDT 5(2)A 250V~
Connectivity	RS-485 port for input expansion via compatible Eliwell	RS-485 port for input expansion via compatible Eliwell
	Televis controllers	Televis controllers
	RS-232 port for exporting data using Microsoft Windows®	RS-232 port for exporting data using Microsoft Windows®
	software (supplied)	software (supplied)
	SD memory card slot for downloading data	SD memory card slot for downloading data
Clock	present	present
Buzzer	present	present
Power consumption	20W max (printer in use)	5W max
Power supply	230V~ ±10% 50/60Hz	230V~ ±10% 50/60Hz
Printer	Integrated thermal printer	-

#### **Accessories**

Codes	Description
RC444444	Thermal paper roll

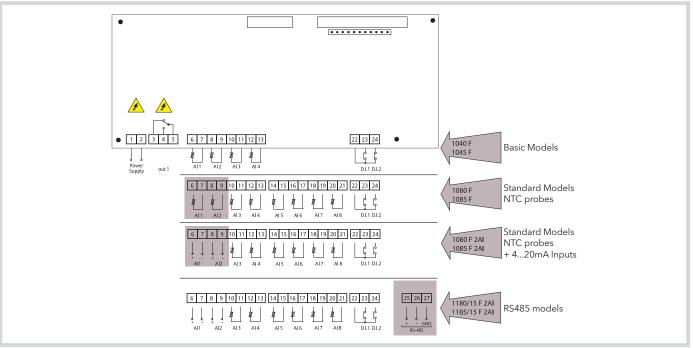

# SerialAdapter - LanAdapter Ethernet - LanAdapter WiFi

**Connectivity modules for monitoring systems** 







Codes	Description
SAT1AMM100000	SerialAdapter 232
LA0ET00X700	<b>Lan</b> Adapter Ethernet
LA0WF00X700	<b>Lan</b> Adapter WiFi

### **Applications**

Serial Adapter is a galvanically isolated RS-232/RS-485 adapter to be used on networks with Televis Go.

Lan Adapter is an Ethernet/RS-485 (or TTL) interface module enabling communication between a LAN and a network of instruments compatible with the Televis protocol. In this way, the LAN network monitoring system can manage data, alarms and connected instrument network functions.


The LanAdapter can be configured via web pages accessible from any PC belonging to the LAN the LanAdapter is connected to.

### **Specifications**

RS-232, Ethernet and WiFi connectivity	Multiple networks using existing LAN infrastructures
Up to 2 SerialAdapter networks with TelevisGo	Televis and ModBus protocol compatibility

General technical specificatio	ns Serial Adapter	LanAdapter Ethernet	LanAdapter WiFi
Casing:	plastic, 2 DIN modules	plastic, 4 DIN modules	plastic, 4 DIN modules
Mounting:	on DIN Omega bar support	on DIN Omega bar support	on DIN Omega bar support
Power supply:	12V <del></del> through Televis <b>Go</b> serial port	100-240V~ ±10% 50/60Hz	100-240V~ ±10% 50/60Hz
Power consumption:	-	4W max	4W max
Insulation class:	-	II	II
Ambient operating temperature:	-5+55°C	0+55 °C	0+55 °C
Storage ambient temperature:	-30+75°C	-20+85 °C	-20+85 °C
Ambient operation and storage humidity:	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)
Terminals:	screw terminals to connect electric cables with a section of max. 2.5 mm <sup>2</sup> (one connector per terminal).	screw terminal to connect electric cables with a section of max. 2.5 mm <sup>2</sup> (one wire per terminal).  RJ-45 connector for connection to Ethernet network	screw terminal to connect electric cable with a section of max. 2.5 mm² (one wire per terminal). Antenna (external)
Connectivity:	• RS-485 port for connection to Televis <b>System</b>	<ul> <li>RS-485 port for connection to Televis<b>System</b></li> <li>TTL port for connection to instruments</li> <li>LAN 10/100 MBps</li> </ul>	<ul> <li>RS-485 port for connection to Televis<b>System</b></li> <li>TTL port for connection to instruments</li> <li>Standard: IEEE 802.11b</li> <li>Frequency band: ISM 2,400</li> <li>GHz2,485 GHz (&lt;100mW e.i.r.p.)</li> <li>Selection of channel: manual/automatic</li> </ul>

### Connectivity

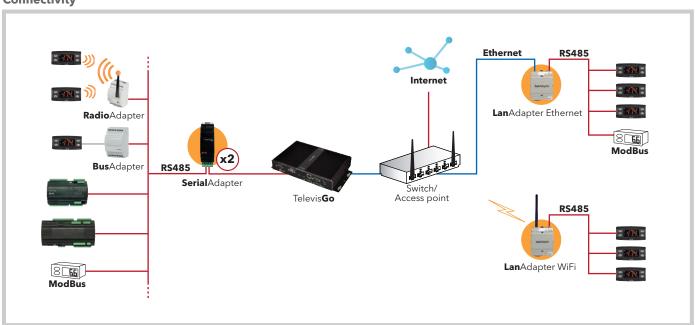

# RadioAdapter - RadioAdapter (/S) EXT - RadioKey

Wireless connectivity modules



Codes	Description
BARFOTTOONHOO	Radio Adapter V2.0
BARFODTOONHOO	RadioAdapter/S V2.0
BARF0TT20NH00	RadioAdapterEXT V2.0
BARF0DT20NH00	RadioAdapter/S EXT V2.0
CCA0B0T01T000	RadioKey (Televis)
CCA0B0T01Mx00	RadioKey (ModBus RTU)

x = based on setting of ModBus RTU serial:

**0:** 9600, 8, N, 1 - **1:** 9600, 8, O, 1 - **2:** 9600, 8, E, 1 - **3:** 19200, 8, N, 1

**4:** 19200, 8, O, 1 - **5:** 19200, 8, E, 1

### **Applications**


Radio Adapter provides a cost-effective, reliable way of building communication networks between monitoring systems and controllers by replacing cables or extending existing networks.

**Radio**Key is a device needed to configure the network.

### **Common features**

Frequency band ISM 2.400 GHz2.485 GHz	Ability to act as a repeater for adjacent nodes
MESH communication technology with automatic directory selection	EC certification for European market
Extensive surface coverage	FCC certification for American market

General technical specifications	Radio Adapter Radio Adapter/S	Radio Adapter EXT Radio Adapter/S EXT	RadioKey
Casing:	3 DIN modules	3 DIN modules	-
Mounting:	on DIN Omega bar support	on DIN Omega bar support	-
Power supply:	100240V~ ±10% 50/60Hz	100240V~ ±10% 50/60Hz	-
Power consumption:	2W	2W	-
Insulation class:	II	II	-
Ambient operating temperature:	-5+60 °C	-5+60 °C	-
Storage ambient temperature:	-20+85 °C	-20+85 °C	-
Ambient	1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)
operation and storage humidity:			
Operating class:	Class 4, ISA classification SP100.11	Class 4, ISA classification SP100.11 (not	-
	(not to be used for safety equipment)	to be used for safety equipment)	
Type of network:	MESH	MESH	-
Protocol supported:	Televis or ModBus RTU	Televis or ModBus RTU	-
Number of nodes per network:	100 max	100 max	-
Number of controllers per node:	240 max	240 max	-
Radio response time:	800msec max.	800msec max.	-
Connectivity:	TTL port for connection to RS-485	TTL port for connection to RS-485	-
	serial port devices - just models /S	serial port devices - just models /S	
Antenna:	2 x 4GHz integrated, multi-directional	external - not included (see Accessories)	
Accessories/notes:	-	External antenna kit + SMA 90°	needed for network configuration.
		connector + 1m cable.	Available for Televis or ModBus RTU
		To be ordered separately	networks

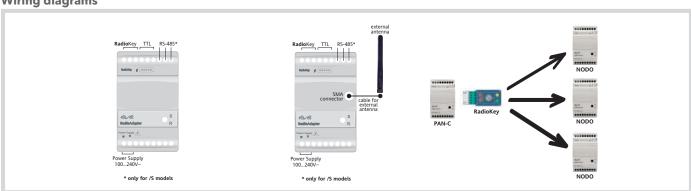

# BusAdapter 130 - 150

### RS-485 opto isolator connectivity modules



Codes	Description	Details
BA11250N3700	BusAdapter 130	1.5 m cable
BA10000R3700	BusAdapter 150	1.5 m cable

### **Applications**


BusAdapter 130 and 150 is a family of devices used to connect Eliwell controllers to wired supervision and monitoring networks in RS-485 mode.

### **Specifications**

130 models have an auxiliary 12V (5 VA) output to power the instrument.

150 models are equipped with reinforced electric insulation

General technical specifications	BusAdapter 130	BusAdapter 150
Casing:	3 DIN modules	3 DIN modules
Mounting:	on DIN Omega bar support	on DIN Omega bar support
Power supply:	230V~ / 115V~ ±10% 50/60Hz	230V~ / 115V~ ±10% 50/60Hz
Power consumption:	6W	1.5W
Insulation class:	II	II
Ambient operating temperature:	-5+55 °C	-5+60 °C
Storage ambient temperature:	-30+75 °C	-30+75 °C
Ambient humidity	1090% RH (non-condensing)	1090% RH (non-condensing)
operation and storage humidity:		
Terminals:	screw terminal to connect electric cables	screw terminal to connect electric cables
	of 2.5 mm² maximum cross-section (one wire per terminal	of 2.5 mm² maximum cross-section (one wire per terminal
	in the case of power connections)	in the case of power connections)
Connectivity:	double RS-485 port for connection to Televis <b>System</b>	• double RS-485 port for connection to Televis <b>System</b>
	TTL port for connection to instruments	• TTL port for connection to instruments
Baud rate:	24009600 Baud	24009600 Baud
Auxiliary output:	12V~ / C ±10% 50/60Hz	/

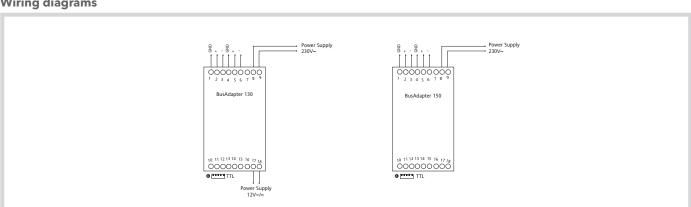

# **Modem GSM/GPRS**

### Modems




Codes	Description
SAMGPRS35AL00	GSM/GPRS W/ANT PSU MODEM KIT
	Includes: power supply unit (European
	10A plug) + antenna with 1.5m cable

### **Applications**

The GSM/GPRS modem can be used to send SMS and for backup connectivity.

Technical Data	Modem GSM/GPRS
Case:	Metal
Dimensions:	91x58.5x22 mm (BxHxD)
Weight:	195g
Frequency bands:	EGSM900/GSM1800MHz, GSM850/900/1800
GSM standard:	GSM phase 2/2+
GPRS standard:	class 10 - 85.6Kbps
Transmission power:	GSM850/900: <33dBm;
	GSM1800: <30dBm
Reception sensitivity:	<-107dBm
Connections:	DB9 port RS-232 serial port, with 15KV ESD protection
	SMA 50 Ohm antenna connection, female connector
	<ul> <li>connector powering 3-pole jack with protection for overvoltages and inverted polarity</li> </ul>
	SIM/USIM 3V/1.8V slot with 15KV ESD protection
Power supply:	535V <del></del> 12V
Power consumption:	<200mA (12V)
Serial configuration:	Speed 110 230400 bps
	5, 6, 7, 8 data bit
	1, 1.5, 2 stop bit
	Parity none, even, odd, space, mark
Operating temperature:	-25+65°C (-13+149°F)
Storage temperature:	-40+85°C (-40+185°F)
Operation and storage humidity:	1095% RH (non-condensing)

### **Dimensions**

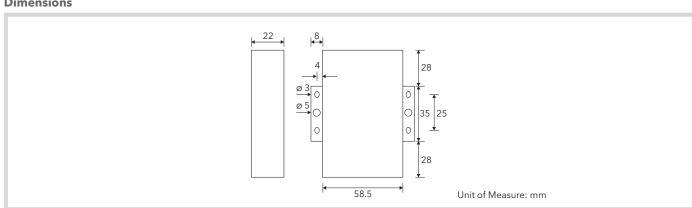

# **ELECTROMECHANICAL ACCESSORIES AND COMPONENTS**



# **DeviceManager**

### **Controller configuration software**





Codes	Description
DMP1000002000	CD DeviceManager
DMI1001002000	DMI 100-1 End User
DMI1002002000	DMI 100-2 Service
DMI1003002000	DMI 100-3 Manufacturer
CO111127	TTL Cable
COLV000016200	USB-A/A extension cable

### **Applications**

Device Manager is a Windows software tool used to manage and for the first installation of Eliwell devices. The software can be used to create and save parameter mapping and transfer it to and from the controller with a few clicks.

Device Manager needs the USB communication interface Device Manager Interface (DMI) to communicate with controllers directly and is compatible with Unicard USB and Multi Function Key to transfer maps, parameters and controller firmware updates. For information on compatibility and functions available with each controller family, please check the compatibility table in the restricted area of **www.eliwell.com** 

### **Specifications**

Graphic interface	Device alarm log management
Eliwell instrument parameter management	Firmware updating
Real-time variable monitoring and management	


Minimum system requirements	DeviceManager
Operating system:	Windows XP Pro SP2, Italian and English.
	Windows XP Home SP2, Italian and English.
	Windows 2000 Professional SP4, Italian and English.
	Windows 7 Premium, Windows 7 Professional, Windows 7 Ultimate, versions 32bit, Italian-English
Software components required besides operating system:	.NET Framework 2.0
Minimum hardware:	• graphics resolution 1024x768
	• 700MHz CPU
	• 256MB RAM
	• HD 1GB
	Mouse or equivalent navigation system
Space required on disk:	Approx. 500 MB for normal installation (2 languages, 50 models)

### **Accessories**

Code	Description	Details
CO111127	TTL cable	1m reinforced cable
COLV000016200	USB-A/A 2MT extension lead	Length 2m

## **Unicard - USB Copy Card - Copy Card - Multi Function Key**

Memory stick for fast configuration and updating of controllers

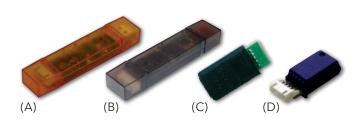

Codes		Description
CCA0BHT00UU00	(A)	UNICARD USB/TTL
CCA0BUI02N000	(B)	USB Copy Card
COLV000016200		Extension lead for USB Copy Card
CC0S00A00M000	(C)	Standard Copy Card
MKF100T000000	(D)	Multi Function Key 100

#### **Applications**

The new USB/TTL Unicard is a memory device for rapid parameter configuration/duplication, specifically designed for controllers in the IDPlus family. By downloading the **Device**Manager software from the **www.eliwell.com** website, maps for instruments in the ID and IDPlus families can be read and written on the Unicard device without having to use other interfaces/licences.

Copy Card and USB Copy Card are memory devices for rapid Eliwell controller parameter configuration/duplication. Multi Function Key is used with **Device**Manager to transfer maps, parameters and controller firmware updates.

#### **Common features**

Unicard has a **standard USB port** for connection to the most widely-used power supply units and adapters on the market (mains-powered, machinepowered, battery-powered, etc.).

Updating device parameter values

Updating device firmware/applications Downloading parameter values from the instrument Downloading alarm log from the instrument


Use	Copy Card	Multi Function key	Unicard	USB Copy Card
IDPlus series	•	+	•	-
EW - EWPlus (EO LVD) series	•	-	•	-
IC series	•	-	-	-
ID series	•	-	-	-
EM300 Series	•	-	-	-
DR 4020 - DR4022	•	-	•	-
EW4820 - EW4822	•	-	-	-
EW 7220 - EW 7222	•	-	-	-
EWTS 950 LX - EWTS 990 LX	•	-	-	-
EWRC 300 - EWRC 500 series	•	-	•	-
EWDR series	•	-	-	-
IWC series	•	-	-	-
IWP 750	•	-	•	-
Televis <b>In</b> - Televis <b>Out</b>	•	-	• / F	-
RTN series	-	•	• / F	-
RTX - RTD series	-	•	• / F	-
ID 985/V	•	-	•	-
V800 Pulse EEV driver	-	-	-	•
V910 - XVD Step EEV Driver	-	•	• / F	-
EWCM 80009000 EO	-	-	-	•/F/L/D
EWCM 4000	•	•	-	-

KEY •: Reading/writing maps parameters F: Updating Firmware L: Updating Interface Languages D: Download Data/Alarms

#### **Counter power supply examples**



### Field power supply examples

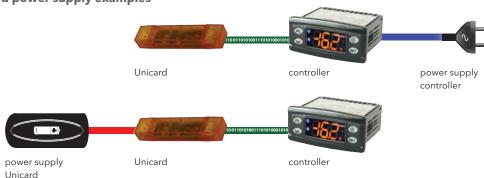

# **NTC** probes

### NTC semi-conductor temperature probes



### NTC co-moulded with double insulation

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type		Dielectric strength	Operating range	Length probe
SN8SAA1502	NTC with double insulation	AISI 304	6x40	silicone	IP67	4000V	-50+120°C	1.5m
SN8PAA1500	NTC with double insulation	AISI 304	6x40	PVC	IP67	4000V	-30+105°C	1.5m

### NTC co-moulded with double insulated cable

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Dielectric strength	Operating range	Length probe
SN8T6H0005	NTC co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber shielded	IP68	2000V	-50+110°C	10.0m
SN8T6H1505	NTC co-moulded with double insulated cable shielded	Thermoplastic rubber	5x20	Thermoplastic rubber	IP68	2000V	-50+110°C	1.5m
SN8DED11502C0	NTC co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	1.5m
SN8DED13002C0	NTC co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	3.0m
SN8DAE11502C0	NTC co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	1.5m
SN8DAE13002C0	NTC co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	3.0m
SN8T6N1502	NTC co-moulded with double insulated cable	AISI 304	6x50	Thermoplastic rubber	IP68	2000V	-50+110°C	1.5m

### **NTC** special versions

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Dielectric strength	Operating range	Length probe
SN8DEB21502C0	NTC clamp-on	Thermoplastic rubber	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	1.5m
SN8DEB23002C0	NTC clamp-on	Thermoplastic rubber	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	3.0m
SN8DNB11502A0	NTC clamp-on probe IP67 Fast response	Copper	4x16	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP67	1500V	-50+110°C	1.5m
SN8DAC11502AV	NTC probe Fast response	AISI 304	4x40	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP67	2000V	-50+110°C	1.5m
SN8DAC13002AV	NTC probe Fast response	AISI 304	4x40	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP67	2000V	-50+110°C	3.0m
SN8DEP15002C0	NTC Probe product simulation	Thermoplastic rubber	Ø 110	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110°C	5.0m

# Pt100 - Pt1000 probes

Pt100 - Pt1000 thermo-resistive temperature probes



### Pt100

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Operating range	Length probe
SN200009	Pt100, 3 wires with steel tube	AISI 316	6x100	Vetrotex	IP44	0+600°C	3mm
SN206000	Pt100, 3 wires with steel tube	AISI 316	6x100	silicone	IP67	-40200 °C	3mm
SN2TAE51502C0	P100 with steel tube	AISI 304	6x50	thermoplastic rubber	IP68	-50+110°C	1.5mm

### Pt1000

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Dielectric strength	Operating range	Length probe
SN9S0A2500	Pt1000 with two wires	AISI 304	6x40	Silicone	IP67	2000V	-50+200 °C	2.5m
SN9DAE11502C6	Pt1000 co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110 °C	1.5m
SN9DAE13002C6	Pt1000 co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110 °C	3.0m
SN9DED11502C6	Pt1000 co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110 °C	1.5m
SN9DED13002C6	Pt1000 co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000V	-50+110 °C	3.0m

# **PTC - TC probes**

### PTC semi-conductor temperature probes, TC thermocouples



### **Applications**

Temperature probes, available in various models, are devices that provide the instruments to which they are connected with temperature measurement through a physical process.

### **Common features**

Accuracy of temperature measurement: +/- 1%

### PTC

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Dielectric strength	Operating range	Length probe
SN7T6A1502	PTC co-moulded with double insulated cable	AISI 304	6x40	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2.000	-50+110°C	1.5m
SN7DAE11502C0	PTC co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000	-50+110°C	1.5m
SN7DAE13002C0	PTC co-moulded with double insulated cable	AISI 304	6×20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000	-50+110°C	3.0m
SN7DED11502C0	PTC co-moulded with double insulated cable	Thermoplastic rubber	5x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000	-50+110°C	1.5m
SN7DED13002C0	PTC co-moulded with double insulated cable	AISI 304	6x20	Thermoplastic rubber (Outer) Polypropylene (Inner)	IP68	2000	-50+110°C	3.0m
SN6070000	PTC for ambient temperature	Plastic	15x70	-	IP54	-	-40+120°C	-
SN603008	PTC for piercing, with PVC grip	AISI 316	3x150	Silicone	IP65	-	-20+110°C	3.0m

### TCK

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type		Dielectric strength	Operating range	Length probe
SN400000	Tck	AISI 304	6x100	TTS	IP45	-	0400°C	3.0m
SN400004	Tck	Inconel 600	6x200	TTS	IP45	-	-401150°C	1.0m

### TCJ

Codes	Description	Capsule Material	Dimensions of capsule mm (ØxL)	Cable type	Level of protection	Dielectric strength	Operating range	Length probe
SN300000	Tcj	AISI 316	6x100	Vetrotex	IP44	-	0350°C	3.0m
SN300008	Tcj	AISI 316	6x100	Vetrotex	IP44	-	0350 °C	1.5m
SN300042	Tcj	AISI 304	6x100	TTS	IP45	-	0350 °C	3.0m

## EWPA 007 - 030 - 050

### **Pressure transducers**



### **Applications**

EWPA pressure transducers are sensors with a current output through which they transmit the signal to the measurement instruments they are connected to.

Technical data	EWPA 007	EWPA 010	EWPA 030	EWPA 050
Operating range	0.58 bar (absolute)	010 bar (absolute)	030 bar (absolute)	050 bar (absolute)
Output signal	2 wires 420 mA			
Overload	2 times pressure range			
Power supply	832V	832V	832V	832V
Accuracy	± 0.5 % FS max			
	(linearity, hysteresis, repeatability)	(linearity, hysteresis, repeatability)	(linearity, hysteresis, repeatability)	(linearity, hysteresis, repeatability)
Compensated temperature	050 °C	050 °C	050 °C	050 °C
Electrical connections	2 m cable, wired	2 m cable, wired	2m cable, wired	2 m cable, wired
	2 m cable with PACKARD	2 m cable with PACKARD	2m cable with	2m cable with
	connector	connector	PACKARD connector	PACKARD connector
			mPm connector	
Mechanical connections	male connector/	male connector/	male connector/	male connector/
	female connector	female connector	female connector	female connector
	1/4 SAE (7/16"-20UNF)	1/4 SAE (7/16"-20UNF)	1/4 SAE (7/16"-20UNF)	1/4 SAE (7/16"-20UNF)
Operating temperature	-40100°C	-40100°C	-40100°C	-40100°C
Global error at T 050 °C	max. ± 1,0 % FS			
Global error at T -1080 °C	max. ± 1,5 % FS			
Response time	(099%) < 5ms	(099%) < 5ms	(099%) < 5ms	(099%) < 5ms
Material in contact	AISI 316L	AISI 316L	AISI 316L	AISI 316L
with the environment	Viton outer seal	Viton outer seal	Viton outer seal	Viton outer seal
Enclosure rating	Packard: IP67	Packard: IP67	Packard: IP67	Packard: IP67
	Cable: IP54	Cable: IP54	Cable: IP54	Cable: IP54

Codes	Description	Connector	Electric connection	IP
TD220030	EWPA 030	1/4 SAE MALE	2m cable	54
TD240030	EWPA 030	1/4 SAE MALE	2m cable with Packard connector	67
TD250030	EWPA 030	1/4 SAE MALE	mPm connector	65
TD320030	EWPA 030	1/4 SAE FEMALE	2m cable	54
TD340030	EWPA 030	1/4 SAE FEMALE	2m cable with Packard connector	67
TD220050	EWPA 050	1/4 SAE MALE	2m cable	54
TD240050	EWPA 050	1/4 SAE MALE	2m cable with Packard connector	67
TD320050	EWPA 050	1/4 SAE FEMALE	2m cable	54
TD340050	EWPA 050	1/4 SAE FEMALE	2m cable with Packard connector	67
TD220007	EWPA 007	1/4 SAE MALE	2m cable	54
TD240007	EWPA 007	1/4 SAE MALE	2m cable with Packard connector	67
TD320007	EWPA 007	1/4 SAE FEMALE	2m cable	54
TD340007	EWPA 007	1/4 SAE FEMALE	2m cable with Packard connector	67
TD320010	EWPA 010	1/4 SAE FEMALE	2m cable	54
TD340010	EWPA 010	1/4 SAE FEMALE	2m cable with Packard connector	67

## EWPA 010 - 030 - 050

### **Ratiometric pressure transducers**



Codes	Description	Connector	Electric connection
TD420010	EWPA 010	1/4 SAE FEMALE	2m cable with Packard connector
TD420030	EWPA 030	1/4 SAE FEMALE	2m cable with Packard connector
TD420050	EWPA 050	1/4 SAE FEMALE	2m cable with Packard connector

### **Applications**

EWPA ratiometric pressure transducers are sensors capable of transmitting a signal by way of a voltage output to the measuring instruments with which they are connected. They offer accurate performance across a wide temperature range.

Technical data	EWPA 010	EWPA 030	EWPA 050
Operating range at 0.54.5V	0145 psi / 010 bar	0515 psi / 035 bar	0667 psi / 046 bar
Output signal	3 wires 0.54.5 V ratiometric	3 wires 0.54.5 V ratiometric	3 wires 0.54.5 V ratiometric
Overload	2.5 times pressure range	2.5 times pressure range	2.5 times pressure range
Power supply	5.0V ± 0.5V	5.0V ± 0.5V	5.0V ± 0.5V
Accuracy	± 0.25 % FS max	± 0.25 % FS max	± 0.25 % FS max
	(linearity, hysteresis, repeatability)	(linearity, hysteresis, repeatability)	(linearity, hysteresis, repeatability)
Energy consumption	8 mA max	8 mA max	8 mA max
Load resistance	> 5ΚΩ	> 5KΩ	> 5KΩ
Electrical connections	2 m cable with PACKARD connector	2 m cable with PACKARD connector	2 m cable with PACKARD connector
Mechanical connections	female connector	female connector	female connector
	1/4 SAE (7/16"-20UNF)	1/4 SAE (7/16"-20UNF)	1/4 SAE (7/16"-20UNF)
Operating temperature	-40125°C	-40125°C	-40125°C
Global error at T 050 °C	max. ± 1.0 % FS	max. ± 1.0 % FS	max. ± 1.0 % FS
Global error at T -1080 °C	max. ± 1.5 % FS	max. ± 1.5 % FS	max. ± 1.5 % FS
Response time	(099%) < 5ms	(099%) < 5ms	(099%) < 5ms
Material exposed to environment	AISI 316L	AISI 316L	AISI 316L
	Viton outer seal	Viton outer seal	Viton outer seal
Enclosure rating	IP67	IP67	IP67

# EWHS 284 - 304 - 314

### **Humidity probes**



### **Applications**

Humidity probes of the EWHS284-304-314 series are intended for connection to humidity and humidity/temperature measuring instruments of superior dependability.

### **Common features**

Ambient humidity:	0100% RH
Air maximum speed	20m/s
Polarity inversion protection:	diode

Technical data	EWHS284	EWHS304	EWHS314
Enclosure rating	IP54	IP65	IP65
Installation	Use the clip supplied with the probe	via 2 external slots	via 2 external slots
Electrical connections	PVC two core cable	Screw terminals	Screw terminals
Dimensions	103x25mm	80x80x52mm	80x80x52mm
Power supply	928Vm	930Vm	1540Vm or 1228V~
Power consumption	20mA max	20mA max	<50mA max
Ambient temperature	-1060°C	-4060°C	-4060 °C (-40140 °F)
Humidity sensor	resistive	HygroMer* IN-1	HygroMer* IN-1
Humidity measurement range	1590% RH	0100% RH	0100% RH
Output current of the humidity measurement	4 (0%)20mA (100%)	4 (0%)20mA (100%)	4 (0%)20mA (100%)
Response time to constant conditions (63%) to 23°C	60 sec	typically 10 sec	typically 10 sec
Recovery time from saturation	360 sec	depending on air flow rate	depending on air flow rate
Temperature for storage	-2070°C	-5070°C	-5070°C
Measurement accuracy of moisture (at 23°C)	±5% RH (in the range 1590% RH)	±2% RH (in the range 1095% RH) ±3% RH (for values <10% or >95% RH)	±2% RH
Number of wires per connection	2 (blue: power; brown: output)	2	4
Air filter	metal wire mesh	polyethylene	polyethylene
Temperature sensor	-	-	Pt100B
Temperature range	-	-	-4060°C (-40140°F)
Output current of the temperature measurement	-		4 (-30 °C)20mA (70 °C)
Accuracy of temperature measurement (at 0 °C and 23 °C)	-	-	±0.3K
Compensation for temperature	-	with NTC	with Pt100B
Connection cable	1m or 3m	-	-
Maximum load	250 Ohm	0 Ohm at 6V= and 5V~ 500Ohm at 15V= and 12V~	0 Ohm at 6V= and 5V~ 500Ohm at 15V= and 12V~
Code	EWHS284 - 1m cable: SN5PPN116I3M0 EWHS284-3 3m cable: SN5PPN131I3M0	EWHS304: SN5NPM1A6I4M0	EWHS314: SN0NPM1A6I4M0

# **Drip protection - Plexiglass protection**

**Protections for 32x74 controllers** 





### **Applications**

These accessories can be used with devices in the ID, IC, IDPlus, EW, EWPlus series.

The drip protection, applied to the rear of the instrument, is a valid support in protecting electrical connectors against dripping liquid.

The plexiglass accessory, equipped with a surface easy to clean, is particularly suitable for use in outdoor environments or characterized by a high degree of dirt.

Code	Description	Details
ZZ000270	Drip protection	Pack of 20
ZZ000272	Plexiglass protection for controllers 32x74	Pack of 10

### **EW BOX - INOX BOX**

**EW BOX - INOX BOX** 



### **Applications**

EW Boxes and INOX Boxes are a range of plastic and stainless steel containers for the wall mounting of instruments designed for panel mounting.

Code	Description
SM000000	EW box without front panel
SM000005	Front panel without holes in ABS for EW box
SM000010	Front panel in ABS for EW vertical box with one hole for standard instrument 32x74 and two holes for switch
SM000013	Front panel in ABS for EW horizontal box with one hole for standard instrument 32x74 and one hole for switch
SM000020	Front panel in ABS for EW vertical box with two holes for standard instrument 32x74 and two holes for switch
SM000030	Front panel in ABS for EW horizontal box with two holes for standard instrument 32x74 and two holes for switch
SM111111	INOX Box with one hole for standard instrument 32x74
SM111112	INOX Box with two holes for standard instruments 32x74

# **TF Transformers**

### **Transformers**



### **Applications**

TF transformers are resin-coated in plastic containers, equipped with fixing tabs and screw terminals for wires  $\leq 2.5 \text{mm}^2$ . Models with different power supply voltages are available.

Code	Model	Details
TF511113	TF 100115120V	115/12V 3VA - cert. UL
TF111145	TF 100115120V	115/12V 3VA
TF11115A	TF 100115120V	110-230/12-12-12 or 12 15VA
TF111115	TF 122448V	24/12V 3VA
TF111162	TF 122448V	24/12V 5.6VA
TF111173	TF 200250V	230/12V 3VA
TF411200	TF 200250V	230/12V - 5VA protected
TF411173	TF 200250V	230/12V 3VA - approved VDE
TF411117	TF 200250V	240/12V 3VA - approved VDE
TF411205	TF 200250V	230/12V - 6VA protected
TF411210	TF 200250V	230/12V - 11VA protected
TF111202	TF 200250V	230/24V 25VA
TF111205	TF 200250V	230/24V 35VA

### **OEM PRODUCTS**



### nEW series

### Solutions for refrigerated counters with compressor on board





- Easy installation with quick connectors
- Front panel and connections protected from water

### **Applications**

The nEW series is the standard Eliwell solution for large production volumes.

Thanks to the flexibility of the platform and the library of available functions, **nEW** is the best solution for manufacturers who are looking for an innovative solution with the advantages of electronic control and at the same time easy to install and use.

#### **Common features**

Direct control of loads up to 2 HP	Use of faston/screw connectors for quick, versatile hookup
Universal power supply switching from 100 to 240Vac 50/60Hz in a single model	Copy cards which can be used for quick programming

Model	Application	Notes
nEW 961	Static units	2Hp power relay for compressor piloting
nEW 971	Ventilated units	2Hp relay, 1 defrost output

### **EWPlus series**

Solutions with icon display





- Display with large digits and coloured icons, to easily understand operating status
- Simple, intuitive menus for fast learning
- Suited for applications with hydrocarbons
- ENEC/UL/NSF Certifications (check on the device label)

### **Applications**

The **EWPlus** series includes flexible, modern design controllers for plug-in refrigerated counters.

Thanks to platform versatility and a library of available functions, Eliwell is the best answer for manufacturers seeking custom solutions for energy saving requirements and simplification of production processes.

### **Common features**

Direct load management up to 2Hp and power supply of 230V~ or 115V~	Unicard USB for customizing even small lots
Use of removable/faston/screw connectors for quick, versatile hookup	Industrial packaging 60 pieces

Model	Application	Notes	
EWPlus 902	Positive temperatures	Change-over contact relay	
EWPlus 961	Static units	2 Hp power relay	
EWPlus 971	Ventilated units	2Hp relays, 1 configurable output	
		(defrost/fans/lights/alarm/stand-by)	
EWPlus 974	Ventilated units	2Hp relays, 2 configurable outputs	
		(defrost/fans/lights/alarm/stand-by)	

## **EWPlus EO series**

High energy saving solutions





- Advanced control algorithms contribute to energy saving up to 39%\* with no modification of counter structure needed
  - Adaptive Energy Saving functions depending on the conditions of use of the cooler
  - Compressor voltage protection assured, increasing duration
  - The product is compatible with the new ecological refrigerants R290, R600, in compliance with IEC 60079-15-2005
  - Optimized temperature management when switching from night to day mode
  - No supplementary sensors needed thanks to the virtual door switch
  - Voluntary certification: ENEC/UL (check on the device label)
  - 4 easily selectable configurations pre-loaded in a single

\*energy saving certified by the independent laboratory INTERTEK

#### **Applications**

The EWPlus EO series controllers are designed to combine high energy savings with maximum ease of installation and use, easily applicable also if replacing prior series controllers.

Thanks to platform versatility and a library of available functions, Eliwell can design custom solutions for energy saving requirements and simplification of production processes.

#### **Common features**


Direct load management up to 2 Hp and power supply of 230V~ or 115V~ Integrated protection of loads against voltage fluctuations controllable by parameter

Use of removable/faston/screw connectors for quick, versatile hookup Unicard USB for customizing even small lots Industrial packaging 60 pieces

Model	Application	Notes
EWPlus 961 EO	Static units	2Hp power relay
EWPlus 971 EO	Ventilated units	2Hp relays, 1 configurable output (defrost/fans/lights/alarm/stand-by)
EWPlus 974 EO	Ventilated units	2Hp relays, 2 configurable outputs (defrost/fans/lights/alarm/stand-by)

#### LOW ENERGY CONSUMPTION

HIGH ENERGY CONSUMPTION



#### **Longer-lasting components**

- Protection of compressor against voltage fluctuations thanks to incorporated low and high voltage detector LVD (patent in the registration process).
- Advanced control algorithms for long-lasting performance with no need to modify counter structure.



**EWPlus EC** 

## EWPlus 961 - 971 EO Dispenser

Solutions for refrigerated dispensers / beer taps





- Electronic temperature control
  - Electronic control of ice level with single and double sensor
  - Ice sensor sensitivity configurable by parameter
  - Compatible with hydrocarbon applications (R290, R600a)


#### **Applications**

EWPlus 961 EO Dispenser is a controller designed to offer a compact, efficient solution to control the refrigeration of drink dispensers, such as beer and soft drinks. Thanks to platform versatility and a library of available functions, Eliwell has integrated control of temperature and ice level into a single controller that can be parameterized from the keyboard to adapt to the various application configurations easily.

#### **Common features**

Configurable inputs for temperature and single or double ice level sensor	Unicard USB for customizing even small lots
230V~ power supply	Industrial packaging 60 pieces

Model	Application	Notes
EWPlus 961 EO Dispenser	Dispenser	Ice level control
EWPlus 971 EO Dispenser	Dispenser	Water pump control

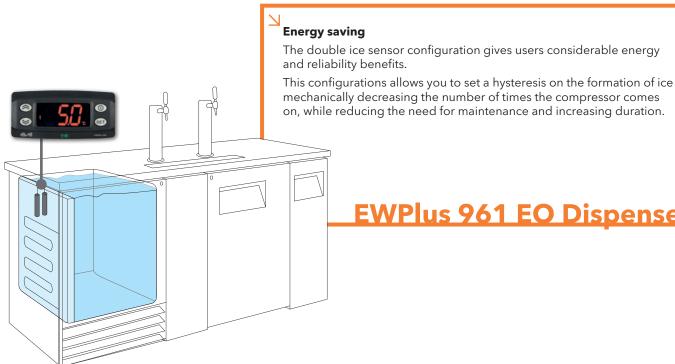

**EWPlus 961 EO Dispenser** 

## **EWPlus 978**

#### Solutions for double evaporator and double compressor





- Solution for combined counters, double evaporator or double compressor
- Compact solution for control of small mono-blocks
- Suited for applications with hydrocarbons

#### **Applications**

The **EWPlus 978** series controllers are designed to combine high energy savings with maximum ease of installation and use, easily applicable also if replacing prior series controllers.

Thanks to platform versatility and a library of available functions, Eliwell can design custom solutions for energy saving requirements and simplification of production processes.

#### **Common features**

4 configurable output relays for double compressor control and single or	12V power supply
double defrost	Unicard USB for customizing even small lots

Model	Application	Notes
EWPlus 978	Combined counters	Single or double compressor
	Mono-blocks	Single or double evaporator



## Application examples

In a combined cold cabinet, EWPlus~978 can manage the double compressor with:

- delayed ignition
- ignition based on differentiated temperature threshold and delay In this case, the controller can manage the set sequence or rotation between two compressors.

It can also manage double defrosting:

- delayed
- with independent defrost end temperatures
- with common defrost time-out

**EWPlus 978** 

## **IWP 750**

#### **Solutions for mono-blocks**





- - Specific solution for mono-blocks with keyboard to be panel mounted with custom polycarbonate
    - Faston type connection for all loads and screw for all signals
  - Keyboard can be set for a distance of up to 100m
  - Board for RS-485 connectivity optional plug-in

#### **Applications**

IWP 750 controllers are designed to combine high energy savings with maximum ease of installation and use, easily applicable also if replacing prior series

Thanks to platform versatility the product can be configured in various relay combinations to adapt to the mono-block better.

#### **Common features**

Power boards and bare keyboard, for panel mounting	Compressor control up to 2Hp
3 temperature probes and 3 configurable digital inputs	SMPS 100240V~ power supply
5 configurable relay outputs	

Model	Application	Notes
IWP 750	Mono-blocks	Power boards with 5 relays
IWK Open		Bare keyboard from panel
		Can be set for a distance of up to 100m



## **Environmental sustainability**

The IWP devices offer a wide range of machine configuration options, predominantly thanks to the vast array of relays, available with power levels of up to 2Hp and used to control two separate compressors directly.

#### Easy to use

The minimised wiring with on-board power relay, quick connections, simple, intuitive remote user interface and support tools allow for straightforward customisation, even on the production line. The IWK remote keypad is available in reduced depth format so that its can even be used in areas where installation conditions are particularly limited.

**IWP 750 - IWK** 

## **IWC 700 series**

#### Controllers for professional applications / catering





- Solutions for professional counters, normally used to store fresh and frozen foods
- Can be connected to remote ECHO display based on model
- Models managing double temperature Set points available

#### **Applications**


 $\textbf{IWC 720-730} \ \text{controllers are suitable for applications on ventilated refrigeration units for normal or low temperatures}$ 

IWC750 Twin is designed specifically to control dual independent temperature refrigeration systems, normally used for the preservation of fresh and frozen foods. IWC730/E Twin with two set points is ideal for catering applications, and can be connected to the Echo remote display.

#### **Common features**

Container	PC+ABS UL94 V-0 resin plastic casing, polycarbonate	Dimensions	front panel 180x37mm, depth 69mm
	display window, switch keys with adhesive	Installation	panel mounting with 150x31mm (+0.2/-0.1mm)
	polycarbonate film		drilling template

Model	Application	Notes
IWC 720	ventilated refrigeration unit (medium or low temperature)	2 configurable relays
IWC 730	ventilated refrigeration unit (medium or low temperature)	3 configurable relays
IWC 730/E TWIN	catering applications	3 configurable relays can be connected to Echo display
IWC 740	ventilated refrigeration unit (medium or low temperature)	4 configurable relays can be connected to Televis monitoring system
IWC 740 COMMON LINE	refrigerators for the preservation and processing of foods/ pastry	4 configurable relays
IWC 750	ventilated refrigeration unit (medium or low temperature)	5 configurable relays can be connected to Televis monitoring system
IWC 750 COMMON LINE	refrigerators for the preservation and processing of foods/ pastry	5 configurable relays
IWC 750 TWIN	dual independent temperature refrigerators	5 configurable relays management of double temperature set points



#### **Application examples**

In a catering counter, the IWC 750 TWIN controller can be set with two separate preservation temperatures, thanks to its double integrated  $% \left( 1\right) =\left( 1\right) \left( 1\right)$ regulator.

Using the IWC 730/E TWIN model, temperatures can also be displayed on the front of the refrigeration counter, thanks to the remote Echo display.

**IWC 700 series** 

## RTX600/V - RTD600/V series

#### **Controllers for supermarket cabinets**



• Specific solutions for high efficiency remote cabinets

- Integrated control of all refrigeration counter functions
- Energy savings with electronic valve control
- Plug-n-play LINK<sup>2</sup> synchronisation for island and remote cabinets

#### **Applications**

RTX600/V and RTD600/V are electronic controllers for remote high efficiency refrigeration cabinets with pulse electronic valve control.


They combine optimised defrost cycle management, dewpoint-based heating and anti-condensation element modulation and cold room Set point modulation, with automatic identification of open/closed operational time bands.

Configuration has been simplified by introducing pre-set profiles for 8 separate applications that can be easily selected through the KDEPlus and KDWPlus user terminals.

#### **Specifications**

Power boards in plastic boxes (RTX), or mounted on DIN Rail (RTD)	AC and DC pulse electronic valve control
3 temperature probes and 3 configurable digital inputs	SMPS 100240V~ power supply
6 configurable relay outputs	

Model	Application	Notes
RTX600/V	Supermarket counters	Version in plastic box
RTD600/V	Supermarket counters	Open version mounted on DIN bar and vertical removable terminals



## **Application examples**


RTX600/V and RTD600/V can be used for different applications.

In a plug-in cabinets, for example, RTX600/V or RTD600/V are used to control compressor, lights and fan connected to the monitoring system via RS-485 network.

In a **remote cabinet**, RTX600/V or RTD600/V can be used for high efficiency control of the electronic pulse expansion valve; several instruments connected via LINK<sup>2</sup> network for efficient synchronisation of defrosting and lights.

The system can be monitored via RS-485 network.

# RTX600/V - RTD600/V

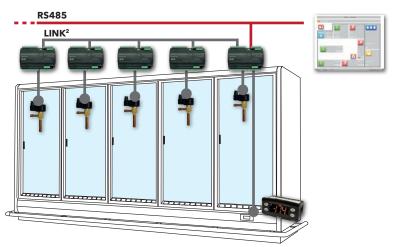

## RTX600 - RTN600 series

#### **Controllers for supermarket cabinets**







- Compact (10 DIN) unit and direct control of loads up to 2HP
- Compressor and fan load protection
- Optimised defrosting (Intelligent Electric defrosting, advanced clock and temperature management)
- Quick and easy to install and configure

#### **Applications**

Electronic controllers RTX600 and RTN600 have energy-saving functions for use in supermarkets and commercial food distribution and storage applications. RTX600 and RTN600 combine optimised defrost cycle management, dewpoint-based heating and anti-condensation element modulation and cold room set point modulation, with automatic identification of open/closed operational time bands.


Configuration has been simplified by introducing preset profiles for 8 separate applications that can be easily selected through the KDEPlus and KDWPlus user

The remote ECPlus display can be used to view displayed data from up to 100m away, differentiating it from the data displayed on KDEPlus and KDWPlus terminals.

#### **Specifications**

Power boards in plastic boxes (RTX), or bare board (RTN)	6 configurable outputs with direct control of loads up to 2HP
3 temperature probes and 3 configurable digital inputs	SMPS 100240V~ power supply

Model	Application	Notes
RTX600	Supermarket counters	Version in plastic box
RTN600	Supermarket counters	Bare board for panel-mounting



#### **Application examples**

RTX600 and RTN600 can be used for different applications.

In a **plug-in cabinets**, for example, RTX600 or RTN600 are used to control compressor, lights and fan connected to the monitoring system via RS-485 network. With RTN600 you need the optional RS-485 connectivity board.

RTX600 - RTN600

## RTN400 series

#### **Controllers for supermarket cabinets**



- Single or dual compressor control
- Advanced resistance defrost
- Evaporator fan control in Night&Day mode
- Fixed duty-cycle frame heater control
- Pre-programmed, easy-to-select configurations.

#### **Applications**

 $\pmb{\mathsf{RTN400}} \text{ are compact controllers for plug-in and remote cabinets with thermostatic valve control}$ 

RTN400 controllers are compact and stand out for the high-performance and high flexibility they offer through energy-saving algorithms and the direct control of


RTN400 for energy saving in supermarkets and in commercial food distribution and preservation applications. It combines optimised defrost cycle management, dewpoint-based heating and anti-condensation element modulation and cold room Set point modulation, with automatic identification of open/closed operational

RTN400 controllers can be interfaced with KDEPlus and KDWPlus keyboards and with the ECPlus display module.

#### **Specifications**

Power boards in compact bare box (121x92mm)	4 configurable output relays with direct control of loads up to 2HP
5 temperature probes and 1 configurable digital input	SMPS 100240V~ power supply

Model	Application	Notes
RTN400	Supermarket counters	Bare board with fast power connections,
		faston type

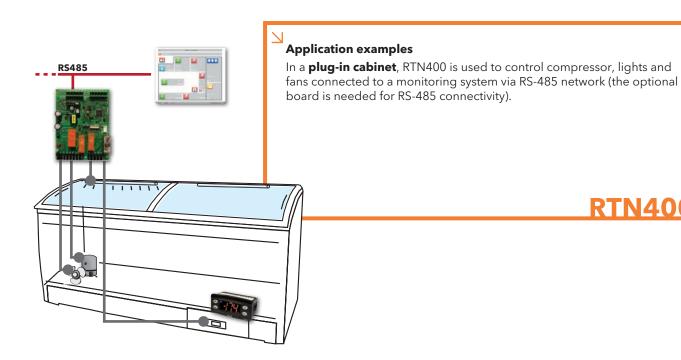

## **KD - ECPlus series user interfaces**

**User interfaces for RT family** 







 KDT: keyboard with touch technology, compatible with controllers in the RT series (RTX, RTD, RTN) and IWP750

• **KDT**: customisable for OEM solutions

#### **Applications**

KDEPlus and KDWPlus are user terminals for full display and programming of controllers for remote and plug-in refrigerated cabinets.

Each power board can be connected to a single KDWPlus keyboard and if required to an ECPlus module for remote display by means of the special connector. The remote **ECPlus** display can be used to view displayed data from up to 100m away, differentiating it from the data displayed on KDEPlus and KDWPlus terminals.

The **KDT** keyboard, made using backlit screen-printed plexiglass, can be used to carry out all procedures currently offered by membrane and standard 32x74 keyboards, but with a perfectly smooth and easy to clean surface, combined with a modern look and the natural feeling of touch-sensitive keys with light and sound feedback. The special construction of the keyboard, with its glued-on installation option, offers reduced installation times, precise positioning and a protection rating of IP65. The simplicity of the KDT keyboard is the result of Eliwell's experience in the study of solutions for design and installation simplification.

Technical data	KDT	KDEPlus	KDWPlus	<b>ECPlus</b>
Casing:	Polymethylmethacrylate	PC+ABS UL94 V-0 resin cas-	PC+ABS UL94 V-0 resin	Body and window in
	(PMMA) front panel	ing, polycarbonate window,	casing, polycarbonate window,	polycarbonate
		thermoplastic resin keys	thermoplastic resin keys	
Dimensions:	front panel 87x135mm, depth 1.5mm	front panel 74x32 mm, depth 30 mm	front panel 180x37 mm, depth 23mm	front panel 48x28.6 mm, depth 15mm
Mounting:	panel mounting, can be set for	panel-mounting, with	panel mounting with	panel mounting with
	a distance of up to 100m, with	71x29mm (+0.2/-0.1 mm)	150x31mm (+0.2/-0.1mm)	45.9x26.4 mm (+0.2/-0.1 mm)
	67x120mm drilling template	drilling template	drilling template	drilling template
Display:	3 digits + sign, 8 coloured icons	with decimal point°	with decimal point°	with decimal point°
	optional colour:	3 digits + sign	3 digits + sign	3 digits + sign
	amber/red/blue/white			
	6 capacitive touch keys			
Display range:		see power board	see power board	see power board
Connectivity:		<ul> <li>screw terminals for</li> </ul>	• screw terminals for	• JST for connection to
		connection to power board	connection to power board	KDWPlus user terminal or
		<ul> <li>JST for connection to</li> </ul>	• JST for connection to	KDEPlus
		ECPlus display	ECPlus display	
Power supply:		from power board	from power board	from power board
Power consumption:		-	-	-
Ambient operating temperature:		-5+55°C	-5+55°C	-5+55°C
Ambient storage temperature:		-30+85 °C	-30+85 °C	-30+85 °C
Ambient operation and storage humidity:		1090% RH (non-condensing)	1090% RH (non-condensing)	1090% RH (non-condensing)

<sup>\*</sup> selectable by parameter

<sup>°</sup> selectable by parameter (from power board)

## **FREE Way**

#### **Programmable platform**



#### **Applications**

FREE Way: the new approach to programmability, giving customers the tools to find their own faster and more effective solutions.

FREE Way is the new range of programmable controllers which consists of the software Suite FREE Studio, of FREE Smart, FREE Panel and FREE Evolution.

Free Studio software suite, simple and flexible, is compatible with the 5 standard programming languages (IEC 61131-3), and is structured to manage a whole range of controllers of different sizes and with varying levels of complexity, in order to fully satisfy the customer's system customization requirements.

## **FREE Studio**

#### **Programmable platform**







Connection





**Applications** 

FREE Studio software suite is compatible with all 5 standard programming languages (IEC61131-3).

Each project can be made up of several programmes.

The developer can use one or more languages in the same project.

Each new programme can be chosen from the 5 programming languages, 2 text and 3 graphic:







Sequential **Function Chart** 





Instruction List

## **FREE Studio features**

- Quick and easy programming
- Single software suite
- Complete and effective online Help
- Advanced debugging and simulation options
- Protection of applications and different use levels
- Application revision log
- Customisable interface

## Application

Component for software developers to allow them to develop and modify applications in the 5 standard programming languages.

#### **Device**

Component specifically for less experienced users, allowing them to manage parameters, download applications, run field tests, etc

#### Connection

Configuration component for both field and open networks, for integration with other systems.

#### **User Interface**

Component for developing and personalizing the graphic interface of the user terminal

#### Simulation

Component for simulating the application on a PC.

## **FREE Smart**

#### **Programmable platform**

It is the smallest programmable controller on the market, combining high performance and efficiency in very compact dimensions. In the 32x74 mm dual format for panel mounting and DIN rail mount version, Smart allows easy programming, significant savings in wiring time and reduction of the cabinets dimensions up to 50%

Thanks to the complete autonomy and configurability of all inputs and outputs, Smart is perfectly adaptable to any system.





#### **FREE Smart features**

- User interface with configurable keys.
- Available in three formats
  - FREE Smart SMP\* 32x74mm
  - FREE Smart SMD\* 4 Din with LED display
  - FREE Smart SMC\* 4 Din with no display
- \* Electrical connections compatible with existing Eliwell product platforms (e.g. Energy Flex); available in versions 100...240V~
- Can be connected to RS-485, Modbus RTU Slave
- Can be connected to standard Eliwell peripherals and user interfaces.

## **FREE Panel**

#### **Programmable platform**

It combines in a single device comprising a programmable user terminal with graphics and a controller with advanced connectivity, for remote resource and distributed control management.

Used in combination with other FREE Smart and Evolution controllers, it ensures high performance in terms of memory, connectivity and user interface, easy programmability, maintenance and service.





## **FREE Panel features**

- FREE Panel EVP system controller, with gateway functions and backlit LCD graphic display
- High connectivity: can be integrated in industrial systems and BMS
- Connects to standard Eliwell and third-party peripheral devices
- Can be panel or wall-mounted

## **FREE Evolution**

#### **Programmable platform**

It represents the top range of programmable controllers, designed to handle the most demanding applications in the HVAC/R field; available in format suitable for 8 DIN rail mounting, with disconnectable screw terminals for quick and easy installation.





#### **FREE Evolution features**

- Fully customizable graphic user interface
- Available in two formats
  - FREE Evolution EVD 8 Din with backlit LCD graphic display
  - FREE Evolution EVC 8 Din with no display
- High connectivity: integrates into industrial systems and BMS using dedicated plug-in modules.
- Connects to standard Eliwell peripheral devices (including FREE Smart)
- Connects to standard third-party peripheral devices

# **APPENDIX**



# **Temperature Probe Tables**

## **Appendices**

## NTC probe table

it ic probe table	
Ambient temperature	Resistance (KOhm)
(°C)	103AT
-50	329.50
-45	247.70
-40	188.50
-35	144.10
-30	111.30
-25	86.43
-20	47.77
-15	53.41
-10	42.47
-5	33.90
0	27.28
5	22.05
10	17.96
15	14.69
20	12.09
25	10.00
30	8.313
35	6.940
40	5.827
45	4.911
50	4.160
55	3.536
60	3.020
65	2.588
70	2.228
75	1.924
80	1.668
85	1.451
90	1.266
95	1.108
100	0.9731
105	0.8572
110	0.7576

## NTC probe table - Extended range

TITO PIONO CANCE			
Ambient temperature	Resistance (KG	Ohm)	
(°C)	Minimum	Standard	Maximum
-40	321.654	333.562	345.877
-35	233.032	241.072	249.364
-30	170.611	176.082	181.710
-25	126.176	129.925	133.773
-20	94.221	96.807	99454
-15	71.015	72.809	74.640
-10	54.004	55.253	56.525
-5	41.419	42.292	43.179
0	32.028	32.640	33260
5	24.962	25.391	25.824
10	19.601	19.902	20.205
15	15.504	15.713	15.924
20	12.348	12.493	12.639
25	9.900	10.000	10.100
30	7.962	8.055	8.150
35	6.444	6.530	6.616
40	5.247	5.325	5.403
45	4.296	4.367	4.438
50	3.537	3.601	3.665
55	2.928	2.985	3.042
60	2.436	2.487	2.538
65	2.037	2.082	2.127
70	1.711	1.751	1.792
75	1.444	1.480	1.516
80	1.224	1.256	1.288
85	1.042	1.070	1.099
90	0.890	0.916	0.941
95	0.764	0.786	0.810
100	0.658	0.678	0.699
105	0.569	0.587	0.605
110	0.493	0.510	0.526
115	0.429	0.444	0.459
120	0.375	0.388	0.402
125	0.328	0.340	0.353
130	0.289	0.299	0.310
135	0.254	0.264	0.274
140	0.224	0.234	0.243
145	0.199	0.207	0.215
150	0.177	0.184	0.192

## PTC probe table

Ambie tempe		Temperature coefficient	KTY82-121			
(°C)	(°F)	(%/K)	Resistance (Ohn		N.4	Error -
			Minimum	Standard	Maximum	temp.
-55	-67	0.99	471	485	500	±3.02
-50	-58	0.98	495	510	524	±2.92
-40	-40	0.96	547	562	576	±2.74
-30	-22	0.93	603	617	632	±2.55
-20	-4	0.91	662	677	691	±2.35
-10	14	0.88	726	740	754	±2.14
0	32	0.85	794	807	820	±1.91
10	50	0.83	865	877	889	±1.67
20	68	0.80	941	951	962	±1.41
25	77	0.79	980	990	1000	±1.27
30	86	0.78	1018	1029	1041	±1.39
40	104	0.75	1097	1111	1125	±1.64
50	122	0.73	1180	1196	1213	±1.91
60	140	0.71	1266	1286	1305	±2.19
70	158	0.69	1355	1378	1402	±2.49
80	176	0.67	1447	1475	1502	±2.80
90	194	0.65	1543	1575	1607	±3.12
100	212	0.63	1642	1679	1716	±3.46
110	230	0.61	1745	1786	1828	±3.83
120	248	0.58	1849	1896	1943	±4.33
125	257	0.55	1900	1950	2000	±4.66
130	266	0.52	1950	2003	2056	±5.07
140	284	0.45	2044	2103	1462	±6.28
150	302	0.35	2124	2189	2254	±8.55

# **Temperature Probe Tables**

Appendices

## Pt100 probe table

Temp. environment	Resistance								
(°C)	(Ohm)								
-200	18.52	20	107.79	230	186.84	440	260.78	650	329.64
-190	22.83	30	111.67	240	190.47	450	264.18	660	332.79
-180	27.10	40	115.54	250	194.10	460	267.56	670	335.93
-170	31.34	50	119.40	260	197.71	470	270.93	680	339.06
-160	35.54	60	123.24	270	201.31	480	274.29	690	342.18
-150	39.72	70	127.08	280	204.90	490	277.64	700	345.28
-140	43.88	80	130.90	290	208.48	500	280.98	710	348.38
-130	48.00	90	134.71	300	212.05	510	284.30	720	351.46
-120	52.11	100	138.51	310	215.61	520	287.62	730	354.53
-110	56.19	110	142.29	320	219.15	530	290.92	740	357.59
-100	60.26	120	146.07	330	222.68	540	294.21	750	360.64
-90	64.30	130	149.83	340	226.21	550	297.49	760	353.67
-80	68.33	140	153.58	350	229.72	560	300.75	770	366.70
-70	72.33	150	157.33	360	233.21	570	304.01	780	369.71
-60	76.33	160	161.05	370	236.70	580	307.25	790	372.71
-50	80.31	170	164.77	380	240.18	590	310.49	800	375.70
-40	84.27	180	168.48	390	243.64	600	313.71	810	378.68
-30	88.22	190	172.17	400	247.09	610	316.92	820	381.65
-20	92.16	200	175.86	410	250.53	620	320.12	830	384.60
-10	96.09	210	179.53	420	253.96	630	323.30	840	387.55
0	100.00	220	183.19	430	257.38	640	326.48	850	390.48
10	103.90								

#### Pt1000 probe table

Pt 1000 probe table									
environment	Resistance	Temp. environment	Resistance	Temp. environment	Resistance	Temp. environment	Resistance	Temp. environment	Resistance
(°C) (	(Ohm)	(°C)	(Ohm)	(°C)	(Ohm)	(°C)	(Ohm)	(°C)	(Ohm)
-200	185.281	20	1077.936	230	1868.465	440	2608.235	650	3297.246
-190	228.327	30	1116.731	240	1904.843	450	2642.196	660	3328.790
-180	271.029	40	1155.411	250	1941.106	460	2676.042	670	3360.219
-170	313.408	50	1193.976	260	1977.254	470	2709.773	680	3391.533
-160	355.484	60	1232.426	270	2013.287	480	2743.389	690	3422.731
-150	397.277	70	1270.961	280	2049.205	490	2776.889	700	3453.815
-140	432.903	80	1308.981	290	2085.007	500	2810.275	710	3484.783
-130	480.081	90	1347.085	300	2120.695	510	2843.545	720	3515.637
-120	521.127	100	1385.075	310	2156.267	520	2876.701	730	3546.375
-110	561.954	110	1422.949	320	2191.725	530	2909.741	740	3576.998
-100	602.578	120	1460.709	330	2227.067	540	2942.666	750	3607.506
-90	643.012	130	1498.353	340	2262.294	550	2975.476	760	3637.899
-80	683.267	140	1535.882	350	2297.406	560	3008.171	770	3668.177
-70	723.355	150	1573.296	360	2332.403	570	3040.751	780	3698.340
-60	763.286	160	1610.595	370	2367.285	580	3073.216	790	3728.387
-50	903.068	170	1647.779	380	2402.052	590	3105.565	800	3758.320
-40	842.71	180	1684.848	390	2436.703	600	3137.800	810	3788.137
-30	882.218	190	1721.801	400	2471.240	610	3169.919	820	3917.840
-20	921.6	200	1758.640	410	2505.661	620	3201.924	830	3847.427
-10	960.859	210	1795.363	420	2539.968	630	3233.813	840	3876.899
0	1000	220	1831.972	430	2574.159	640	3265.587	850	3906.256
10	1039.025								

# **Temperature probe tables**

## Appendices

## **TCJ** probe table

Temp.	0°C	-10°C	-20°C	-30°C	-40°C	-50°C	-60°C	-70°C	-80°C	-90°C
-200°C	-7.890	-8.095	-	-	-	-	-	-	-	-
-100°C	-4.633	-5.037	-5.426	-5.801	-6.159	-6.500	-6.821	-7.123	-7.403	-7.659
0°C	0.000	-0.501	-0.995	-1.482	-1.961	-2.431	-2.893	-3.344	-3.786	-4.215
	10°C	20°C	30°C	40°C	50°C	60°C	70°C	80°C	90°C	100°C
0°C	0.000	0.507	1.019	1.537	2.059	2.585	3.116	3.650	4.187	4.726
100°C	5.269	5.814	6.360	6.909	7.459	8.010	8.562	9.115	9.669	10.224
200°C	10.779	11.334	11.889	12.445	13.000	13.555	14.110	14.665	15.219	15.773
300°C	16.327	16.881	17.434	17.986	18.538	19.090	19.642	20.194	20.745	21.297
400°C	21.848	222.400	22.952	23.504	24.059	243610	24.164	25.720	26.276	26.834
500°C	27.393	27.953	28.516	29.080	29.647	30.216	30.788	31.362	31.939	32.519
600°C	33.102	33.689	34.279	34.873	35.470	36.071	36.675	37.284	37.896	38.512
700°C	39.132	39.755	40.382	41.012	41.645	42.281	42.919	43.559	44.203	44.848
800°C	45.494	46.141	46.786	47.431	48.074	48.715	49.353	49.989	50.622	51.251
900°C	51.877	52.500	53.119	53.735	54.347	54.956	55.561	56.164	56.763	57.360
1000°C	57.953	58.545	59.134	59.721	60.307	60.890	61.473	62.054	62.634	63.214
1100°C	63.792	64.370	64.948	65.525	66.102	66.679	67.255	67.831	68.406	68.980
1200°C	69.553	-	-	-	-	-	-	-	-	-

## TCK probe table

Temp.	0°C	-10°C	-20°C	-30°C	-40°C	-50°C	-60°C	-70°C	-80°C	-90°C
-200°C	-5.730	-6.035	-6.158	-6.262	-6.344	-6.404	-6.441	-6.458	-	-
-100°C	-3.554	-3.852	-4.138	-4.411	-4.669	-4.913	-5.141	-5.354	-5.550	-5.730
0°C	0.000	-0.392	-0.778	-1.156	-1.527	-1.889	-2.243	-2.587	-2.920	-3.243
	10°C	20°C	30°C	40°C	50°C	60°C	70°C	80°C	90°C	100°C
0°C	0.000	0.397	0.798	1.203	1.612	2.023	2.436	2.851	3.267	3.682
100°C	4.096	4.509	4.920	5.328	5.735	6.138	6.540	6.941	7.340	7.739
200°C	8.138	8.539	8.940	9.343	9.747	10.153	10.561	10.971	11.382	11.795
300°C	12.209	12.624	13.040	13.457	13.874	14.1293	14.713	15.133	15.554	15.975
400°C	16.397	16.820	17.243	17.667	18.091	18.516	18.941	19.366	19.792	20.218
500°C	20.644	21.071	21.497	21.924	22.350	22.776	23.203	23.629	24.055	24.480
600°C	24.905	25.330	25.755	26.179	26.602	27.025	27.447	27.869	28.289	28.710
700°C	29.129	29.548	29.965	30.382	30.798	31.213	31.628	32.041	32.453	32.865
800°C	33.275	33.685	34.093	34.501	34.908	35.313	35.718	36.121	36.524	36.925
900°C	37.326	37.725	38.124	38.522	38.918	39.314	39.708	10.101	40.490	40.885
1000°C	41.276	41.665	42.053	42.440	42.826	43.211	43.595	43.978	44.359	44.740
1100°C	45.119	45.497	45.873	46.249	26.623	46.995	47.367	47.737	48.105	48.473
1200°C	48.838	49.202	49.565	49.926	50.286	50.644	51.000	51.355	51.708	52.060
1300°C	52.410	52.759	53.106	53.451	53.795	54.138	54.479	54.819	-	-


# IDPlus vs EW and ID, ICPlus vs IC compatibility

**Compatibility tables** 

IDPlus models	IC - ID	EWPC - EWTC - EWPX	EW - EWPlus*
IDPlus 902 Outputs: 8A SPDT	IC 901 IC 902 ID 961 ID 961LX	EWPC 901 EWPC 902 EWPC 961 EWTC 101 EWPX 161	EW 902 EWPlus 902
IDPlus 961 Outputs: 2Hp SPST	IC 901 IC 902 ID 961 ID 961LX	EWPC 901 EWPC 902 EWPC 961 EWTC 101 EWPX 161	EW 961 EWPlus 961
IDPlus 971 Outputs: 2Hp + 8A	ID 961/A ID 970 ID 970LX ID 971 ID 971LX	EWPC 970 EWPC 971 EWPX 161AR EWPX 170 EWPX 171	EW 971 EWPlus 971
IDPlus 974 Outputs: 2Hp + 8A + 5A	ID 974 ID 974 LX	EWPC 974 EWPX 174	EW 974 EWPlus 974
<b>IDPlus 978</b> Outputs: 1.5Hp + 8A + 5A	ID 975LX ID 983 ID 985 ID 983LX (no C/K/S) ID 985LX (no C/K/S)	EWPX 174AR EWPX 174AX EWPX 185 EWPX 190	EWPlus 978

ICPlus models	IC	EWPC - EWTC
ICPlus 902/A	IC 901/A	-
ICPlus 902	IC 901 IC 902 IC 912 (no LX) IC 912LX V/I	EWPC 901 EWPC 902 EWTC 101
ICPlus 915	IC 912LX (no V/I) IC 915 IC 915LX	EWPC 905

\*NB - Controllers in the series for OEM EW / EWPlus include a connection between power supply and loads that is not found in the IDPlus series. Thus a bridge is needed between controller load line and power supply, see example shown:

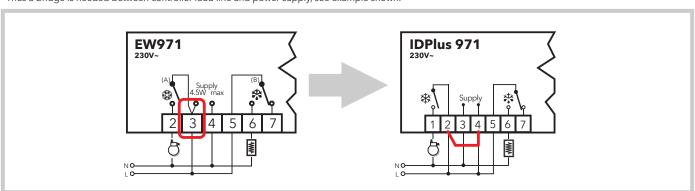

Appendix

# This document is the exclusive property of Eliwell Controls s.r.l. and may not be reproduced or circulated unless expressly authorised by Eliwell Controls s.r.l. While all possible care has been taken to ensure the accuracy of this document, Eliwell Controls s.r.l. cannot accept liability for any damage resulting from its use. The same applies to any person or company involved in the creation and preparation of this document. Eliwell Controls s.r.l. reserves the right to make changes or improvements at any time without notice.

The type approval marks associated with each individual instrument are present for certain specific part numbers only. Check details and availability with sales department.

**15 A1**° **C**F



#### **ITALIA - HEADQUARTERS**

#### **Eliwell Controls Srl**

Via dell' Industria, 15 Z. I. Paludi 32010 Pieve d' Alpago (BL) - Italy

T +39 (0)437 986 111

#### **Sales**

T +39 (0)437 986 100 (Italy)

T +39 (0)437 986 200 (other countries)

E saleseliwell@invensys.com

#### **Technical Support**

T +39 (0)437 986 300

E techsuppeliwell@invensys.com

#### **SPAIN**

Eliwell Iberica S.A. - Valencia

T +34 (0) 96 313 42 04

E info@eliwell.es

www.eliwell.es

#### **GERMANY**

Eliwell Deutschland - Nürnberg

T +49 (0) 911 56 93 430

E eliwell.deutschland@invensys.com

www.eliwell.de

#### **FRANCE**

Eliwell France - Paris

T +33 (0) 1 41 47 71 71

E contact@eliwell.fr

www.eliwell.fr

#### **RUSSIA**

Moscow

T +7 499 611 79 75

www.eliwell.com

#### **CHINA**

Shanghai

T +39 (0)437 986 200

E eliwell.china@invensys.com

www.eliwell.cn

#### **UNITED STATES**

Chicago, IL

#### Sales

T (855) 574 - 9214

#### **Technical Support**

T (855) 574 - 9484

www.eliwell.com

#### **BRAZIL**

Campinas

T +39 (0)437 986 200

vendas.eliwell@invensys.com

www.eliwell.com

#### **OTHER COUNTRIES**

T +39 0437 986 111

#### Sales

T +39 0437 986 200

E saleseliwell@invensys.com

#### **Technical Support**

T +39 0437 986 300

E techsuppeliwell@invensys.com

www.eliwell.com





CT123247 - EN • rel. 02/14 © Copyright Eliwell Controls s.r.l. 2014 - All rights reserved

Follow us on





www.eliwell.com

Eliwell has been offering for more than 30 years control systems and services for refrigeration and air conditioning units for both commercial and industrial applications, delivering highly innovative and technologically advanced products. Eliwell and Invensys are now part of the Schneider Electric Group. Subscribe to our newsletter in our webpage www.eliwell.com.

